





PURVEYORS OF FINE MACHINERY®, SINCE 1983!

- ER A MILLION SQUARE FEET PACKED TO THE RAFTERS WITH MACHINERY & TOOLS
- 2 OVERSEAS QUALITY CONTROL OFFICES STAFFED WITH QUALIFIED GRIZZLY ENGINEERS
- HUGE PARTS FACILITY WITH OVER 1 MILLION PARTS IN STOCK AT ALL TIMES
- TRAINED SERVICE TECHNICIANS AT ALL 3 LOCATIONS
- MOST ORDERS SHIPPED THE SAME DAY
 24 HOUR ORDERING BY PHONE OR ONLINE

10" Left Tilting Super Heavy-Duty Table Saw with Riving Knife

- Motor: 3 HP, 220V, single-phase, 3450 RPM
- Precision ground solid cast iron table
- Table size with extension wings: 40" x 27"

 Max. dado width: 7/8" Arbor: 5/8"

· Cutting capacity: 8" L, 26" R Max. depth of cut: 3" @ 90°, 21/8" @ 45°

 Approx. shipping weight: 514 lbs.



INTRODUCTORY PRICE ONLY \$112500

G1023RL

12" Left-Tilting Extreme Series® Table Saw with Riving Knife Feature

- Motor: 5 HP, 220V, single-phase
- Table size with extension: 30¾" x 48¾"

Arbor speed: 3600 RPM

Arbor: 5/8" & 1"

Max. dado width: 3/4"

Max. rip capacity: 36"

 Max. depth of cut: 4" @ 90°, 23/4" @ 45°

FREE 10"

CARBIDE

TIPPED

BLADE!

MOBILE

BASE

FREE SAFETY

PUSH BLOCKS

G04527

12" Baby Drum Sander

Sanding motor: 1½ HP, 110V, single-phase

Conveyor motor: 1/8 HP, 110V, single-phase,

Max. stock dimensions: 12" wide x 31/2" thick

 Approx. shipping weight: 756 lbs.

EXTREME

G0696X \$1995.00 SALE \$189500



FEATURES DIGITAL

BEVEL ANGLE READOUT

INCLUDES 12" BLADE

20" Planers

- · Motor: 5 HP, 220V, single-phase
- Table size: 20" x 25¾" (20" x 551/2" with extension)

Max. stock thickness: 8"

- Min. stock thickness: 3/16
- Min. stock length: 7½"
- Max. cutting depth: 1/8"
- · Cutterhead speed: 5000 RPM
- Feed rate: 16 & 20 FPM
- · Approx. shipping weight: 920 lbs.

G0454 \$1495.00

G0454Z WITH SPIRAL CUTTERHEAD

\$2295.00 SALE \$219500



PRECISION GROUND

CAST IRON BED &

INFEED OUTFEED TABLES

SAFETY SWITCH

6" Jointers with Mobile Base

- Motor: 1 HP, 110V or 1½ HP, 110V/220V, single-phase
- Precision ground cast iron table size: 7½" x 46"
- Max. depth of cut: 1/8"
- Rabbeting capacity: ½" Cutterhead diameter: 2½"
- Cutterhead speed: 4800 RPM
- Approx. shipping weight: 270 lbs.

RACK & PINNION FENCE ADJUSTMENT

G0452 1 HP MOTOR \$425.00 SALE \$39500

G0452Z 11/2 HP WITH SPIRAL CUTTERHEAD

\$675.00 SALE \$65000

variable speed 5-35 FPM

. Min. stock length: 8"

Sanding belt: 3" hook

Sanding drum: 4"

& loop

Dust collection

Approx. shipping

weight: 160 lbs.

port: 21/2"

Drum surface speed: 2127 FPM

8" x 76" Parallelogram Jointers

- Motor: 3 HP, 220V, single-phase, TEFC, 3450 RPM
- Precision ground cast iron table size: 8" x 76%"
- Cutterhead speed: 5350 RPM
 Cutterhead dia.: 3³/₁₆"
- Deluxe cast iron fence: 36"L x 11/4"W x 5"H

Max. rabbeting depth: ½"



G0490 \$895.00 SALE \$82500

G0490X WITH SPIRAL CUTTERHEAD

\$1195.00 SALE \$109500



SAFETY

PUSH

BLOCKS

17" Heavy-Duty Extreme Series® **Bandsaw** with Cast Iron Wheels & Trunnion

MADEIN ISO 9001 FACTORY!

- Motor: 2 HP, 110V/220V, single-phase, TEFC
- Precision ground cast iron table size: 235/8" x 171/4"
- · Table tilt: 5° left, 45° right
- Max. cutting height: 12"
- Blade size: 1311/2"L (1/8" 1"W)
- 2 blade speeds: 1700 &

3500 FPM

Approx. shipping weight: 418 lbs.



DELUXE RESAW FENCE & MITER GAUGE

G0513X2 \$995.00 SALE \$89500

12"x 831/2" **Parallelogram Jointers**

- · Motor: 3 HP, 220V, single-phase
- Precision ground cast iron table size: 12¾" x 83½"
- Cutterhead speed: 4950 RPM

 Max.depth of cut: 1/8" Max. rabbeting capacity: 3/4"

 Approx. shipping weight: 1059 lbs.



HANDLES FOLD IN FOR ADDED

G0609 \$1895.00 SALE \$179500

G0609X WITH SPIRAL CUTTERHEAD

\$2250.00 SALE \$219500



FREE

PUSH

BLOCKS

19" Heavy-Duty Extreme Series® Bandsaw

- Motor: 3 HP, 220V, single-phase, TEFC, 1725 RPM
- Precision ground cast iron table size: 26¾" x 19"
 - Table tilt: 5° L, 45° R Max. cutting height: 12"

 - Cutting capacity/throat: 181/4"
 - Blade size: 143" L(½" 1½" W)

 - Blade speeds: 1700 & 3500 FPM

 Approx. shipping weight: 480 lbs.

GEARED TABLE TILT MECHANISM

HEAVY-DUTY CASTIRON EXTREME FENCE & CAST IRON **TABLE TRUNNIONS!**



G0514X2 \$1395.00 SALE \$129500



G0459 \$695.00

SALE \$52500



TECHNICAL SERVICE: 570-546-9663 FAX: 800-438-5901


3 GREAT SHOWROOMS! BELLINGHAM, WA . MUNCY, PA . SPRINGFIELD, MO



HOLIDAY SALE

PRICES VALID November 1st - DECEMBER 31st PLEASE VISIT GRIZZLY.COM TO SEE ALL SALE SPECIALS





 Motor: 3 HP, 220V, single-phase Table size with extension:

G0690 -27" x 40" G0691 - 27" x 743/4"

Blade tilt: left

Arbor: 5/8"

Arbor speed: 4300 RPM

Max. dado width: ¹³/₁₆"

 Max. rip capacity: G0690 - 291/2", G0691 - 50"

Max. depth of cut: 31/8" @ 90°, 23/16" @ 45°

TIPPED BLADE! Approx. shipping weight: G0690-542 lbs. G0691-572 lbs.

G0690 \$1250.00

SALE \$115000

FREE 10"

CARBIDE

G0691 WITH EXTENSION RAILS \$1350.00

SALE \$125000 16



3 HP LEESON® MOTOR!



CAST IRON TRUNNIONS

Sliding Table & **Router Attachments** For G0690 & G0691 Table Saws

SUPERB QUALITY! SLIDING TABLE ATTACHMENT ROUTER TABLE ATTACHMENT

T10222 \$395.00

SALE \$37500 659

T10223 \$550.00

Cyclone Dust Collector

 Motor: 1½ HP, 110V/220V, single phase, TEFC, 3450 RPM, prewired 110V

Air suction capacity: 775 CFM

Static pressure at rated CFM: 1.08"

 Intake port: 6" with included 5" optional port

Impeller: 13½"

 Cartridge filter surface area: 6975 sq. in.

Overall dimensions: 381/4" W x 231/4" D x 681/2" H

Approx. shipping weight: 210 lbs.

COLLECTION DRUM IS MOUNTED ON CASTERS FOR EASY DUST REMOVAL

THE POWER OF A 2 STAGE CYCLONE IN A NEW COMPACT SIZE!

G0703 \$850.00 SALE \$79500





CELEBRATE THE SEASON WITH NEW DAZZLING WHITE MACHINES OF THE SAME **QUALITY AS OUR REGULAR GRIZZLY VERSIONS!**










☑BillMeLater





OVED 12 000 DDODIICTS ONLINE

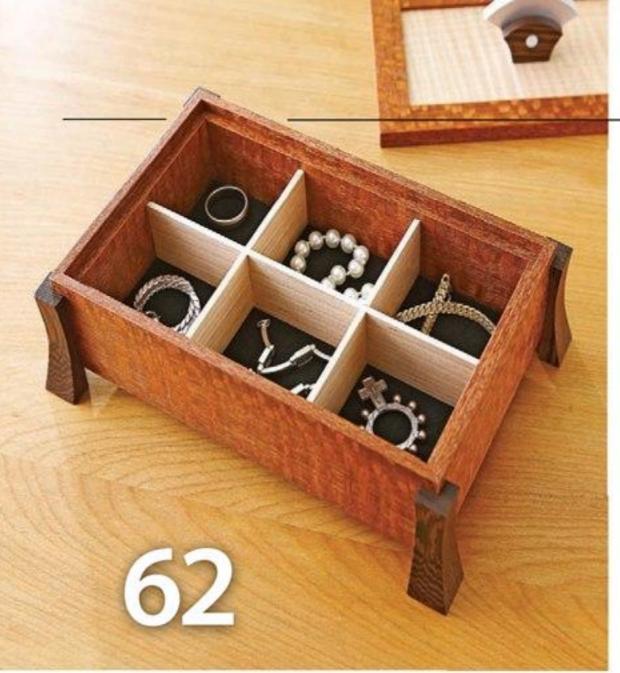

PROJECTS

- 32 Shop Project: Router-Table Dust Hood
- 34 Toy Box/Blanket Chest
- 40 Glass-Topped Display Table
- 52 Gumball Machine
- 62 Giftable Wooden Box


SKILL BUILDERS

- 16 Finishing: When to Use Sanding Sealer
- 20 Half-Lap Joinery with a Sliding Mitersaw
- 24 Rust! Just Bust It with These Tips
- 49 Get Tablesaw Accuracy from a Mitersaw
- 66 Add Bling to Basic Boxes
 Learn dozens of ways to take a basic
 wooden box from bland to beautiful.

TOOLS & MATERIALS

- 28 How to Buy Good Plywood
- 56 Bench Test: 10" Sliding Mitersaws
- 72 Cover: Most Innovative Tools of 2011
- 80 Shop-Proven Products
 Ridgid trim router, torsion hinges, more.

52

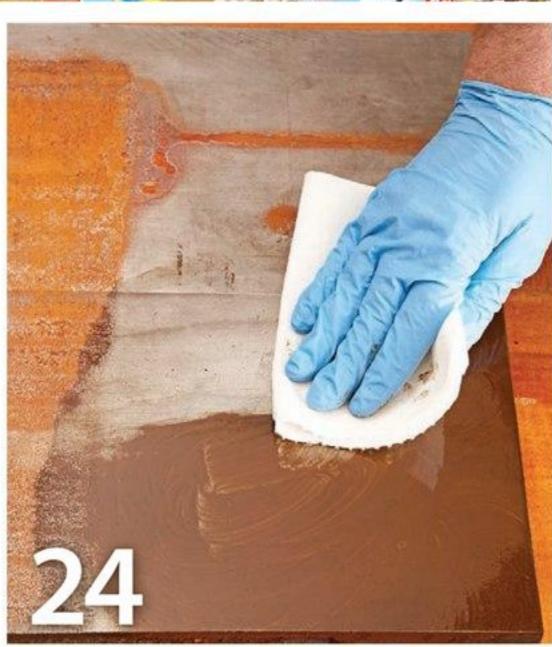


DEPARTMENTS

- 6 Sounding Board
- **8 Shop Tips**
- 26 Shop Monkey: Gift-Building Tips
- 45 Index of Issues 195-201
- 76 Ask WOOD
- 92 What's Ahead






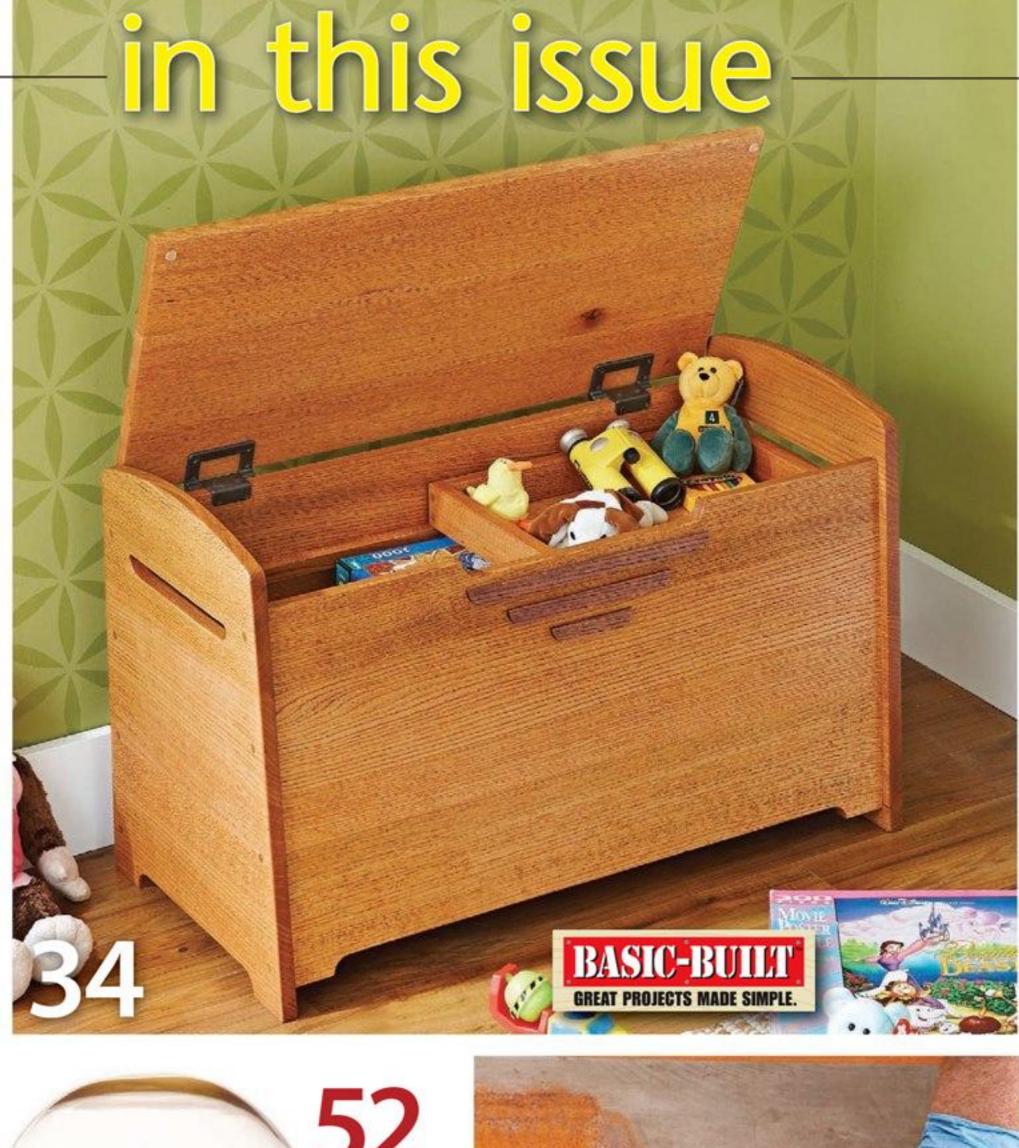



This seal is your assurance that we build every project, verify every fact, and test every reviewed tool in our workshop to guarantee your success and complete satisfaction.



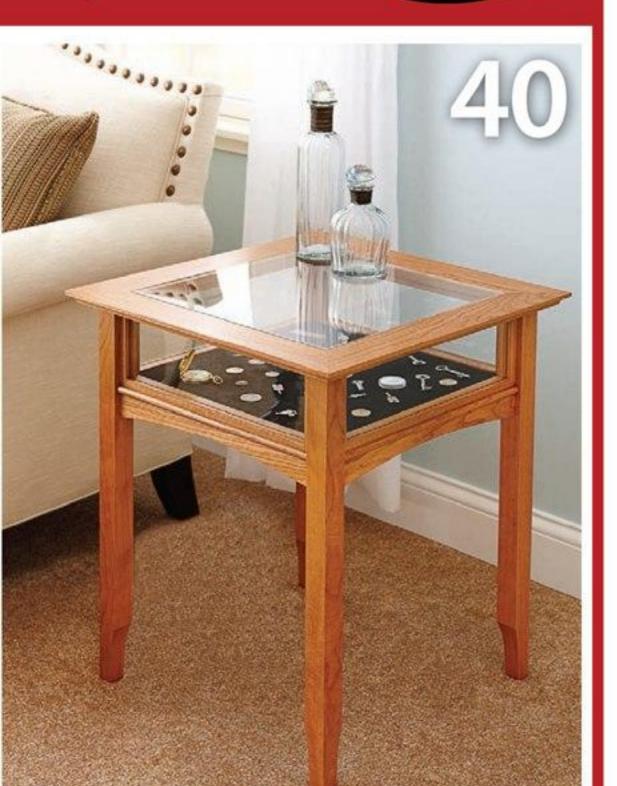

on our website

woodmagazine.com

12 LAST-MINUTE GIFTS YOU CAN BUILD

Quick & Easy Rocking Horse: woodmagazine.com/easyrockinghorse

Tone-of-Fun Tongue Drum: woodmagazine.com/tonguedrum
 End-Grain Cutting Board: woodmagazine.com/cuttingboard

• End-Grain Cutting Board: woodmagazine.com/cuttingboard

Splined Ornamental Box: woodmagazine.com/splinedbox
 Contractor Grade Grane Toxy woodmagazine.com/splinedbox

Contractor-Grade Crane Toy: woodmagazine.com/cgcrane

Child's Dancing Clock: woodmagazine.com/dancingclock
 Wristwatch Wall Clock: woodmagazine.com/watchclock

Countertop Wine Rack: woodmagazine.com/winerack


Quilt Ladder: woodmagazine.com/quiltladder

Bread Knife: woodmagazine.com/breadknife

Two Wooden Puzzles (right and below)

Flag Case: woodmagazine.com/flagcase

The dovetailed box at *left* looks impossible to open, yet it's deceptively easy to build. Get plans for this and the magnetic-latching puzzle box, *above*, at woodmagazine.com/puzzlepin

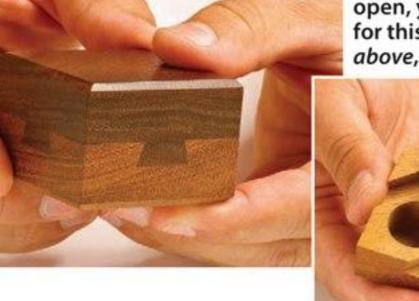



READER VIDEOS INFORM AND ENTERTAIN



Check out videos made by fellow woodworkers, or upload your own. Featured this month at woodmagazine.com/woodtube:

- Installing Drawer Slides by James Wheeldon
- Setting Up a Mortiser by Charles Neil
- Episode 77: Jointer Basics by Kosta
- From Firewood to Bowl (left) by RonnyV
- Man vs. Wood (parody of Man vs. Wild cable TV show) by Steve in Marin
- · plus hundreds more!

RESEARCH TOOLS BEFORE YOU BUY





Freud Creates a New "Rout" To Italy



WOOD Magazine Contest

Build any Creative Project with Extended Tenons & Raised or Flat Panels to Enter to Win!



Grand Prize: 4 day/3 night Trip for 2 to Italy and \$1,000 of Freud Products

Second Prize: \$1,000 of Freud Innovative Products

Third Prize: \$200 of Freud Innovative Products

Contest Runs: Aug 1, 2010 - Dec 31, 2010

For More Details Go To:

www.WOODMagazine.com/FreudContest

Subject to Official rules at www.woodmagazine.com/freudcontest. No purchase necessary to enter or win. To enter, visit www. woodmagazine.com/freudcontest and click the button to enter. Then complete the registration and follow the instructions to upload one (1) album of photos (up to six (6) photos) of a project utilizing flat or raised panels and extended tenons. One album is one entry. One entry per person. Open to legal residents of the 50 United States, and the District of Columbia, 21 years or older. The Ultimate Rail & Stile Photo Contest entry period begins on August 1, 2010, and ends on December 31, 2010. Entries must be received by 11:59 p.m. C.T., on December 31, 2010. Void where prohibited. Sponsor: Meredith



December/January 2010/2011

Vol. 27, No. 7

Issue No. 202



As a graduation gift to a niece, Bob built this vanity table, using only a photo for his plans.

Mark and his daughter,

Carly, made this walnut

dresser (issue 160) and

bookcase (issue 154).

EDITOR-IN-CHIEF BILL KRIER

Managing Editor
MARLEN KEMMET

Art Director KARL EHLERS

Tools Editor BOB HUNTER

LUCAS PETERS Design Editor

JEFF MERTZ

Administrative Assistant SHERYL MUNYON Deputy Editor
DAVE CAMPBELL

Senior Design Editor **KEVIN BOYLE**

Projects Editor CRÁIG RUEGSEGGER

How-To Editor Associate Art Director **GREG SELLERS**

Production/Office Manager MARGARET CLOSNER



Craig designed and built this red-oak cabinet with maple drawer sides.

Photographers JASON DONNELLY, SCOTT LITTLE, JAY WILDE Contributing Illustrators TIM CAHILL, LORNA JOHNSON, ROXANNE LeMOINE

Technical Consultants BOB BAKER, DOUG HICKS, ERV ROBERTS

Contributing Craftsman JIM HEAVEY Proofreaders BABS KLEIN, IRA LACHER, JIM SANDERS

Publisher MARK L. HAGEN

ADVERTISING AND MARKETING

CHICAGO: 333 N. Michigan Ave., Suite 1500, Chicago, IL 60601

Advertising Manager JACK CHRISTIANSEN Direct Response Advertising Representative LISA GREENWOOD

Assistant KEVIN BARRY

ATLANTA: Navigate Media **DETROIT: RPM Associates**

Business Manager JEFF STILES

Consumer Marketing Director TODD BIERLE Retail Brand Manager-Newsstand JESS LIDDLE

Production Manager SANDY WILLIAMS

Advertising Operations Manager JIM NELSON E-Commerce Manager MATT SNYDER

Vice President/Group Publisher TOM DAVIS

MEREDITH NATIONAL MEDIA GROUP

President TOM HARTY

EXECUTIVE VICE PRESIDENTS

President, Consumer Brands ANDY SAREYAN

President, Meredith Integrated Marketing MARTIN F. REIDY

Chief Marketing Officer NANCY WEBER

Chief Revenue Officer MICHAEL BROWNSTEIN

Chief Innovation Officer, Meredith 360° JEANNINE SHAO COLLINS

General Manager MIKE RIGGS

Director Operations & Business Development DOUG OLSON

SENIOR VICE PRESIDENTS VICE PRESIDENTS

Consumer Marketing DAVID BALL Corporate Sales BRENDAN SMYTH

Editorial Director, Des Moines GAYLE GOODSON BUTLER Direct Media & Travel Marketing PATTI FOLLO

Editorial Director, New York SALLY LEE New Media & Marketing Services ANDY WILSON

Meredith Women's Network LAUREN WIENER Research Solutions BRITTA WARE

Group Publisher JAMES CARR Communications PATRICK TAYLOR

Group Publisher CAREY WITMER Newsstand DAVID ALGIRE

Production BRUCE HESTON



Chairman and Chief Executive Officer STEPHEN M. LACY

Vice Chairman MELL MEREDITH FRAZIER

In Memoriam — E.T. Meredith III (1933–2003)

Our subscribers list is occasionally made available to carefully selected firms whose products may be of interest to you. If you prefer not to receive information from these companies by mail or by phone, please let us know. Send your request along with your mailing label to Magazine Customer Service, P.O. Box 37452, Boone, IA 50037-0452.

> Copyright Meredith Corporation 2010. All rights reserved. Printed in the U.S.A. Retail Sales: Retailers can order copies of WOOD for resale by e-mailing jennifer.buser@meredith.com

SUBSCRIBER SERVICE

4

Go to woodmagazine.com/help or write to WOOD magazine, P.O. Box 37439, Boone, IA 50037-0439









Now with Freud's new, patented Premier Adjustable Rail and Stile router bit system, you are able to build any style of cabinet door in a wide range of door thicknesses and sizes! This extremely easy-to-use solution gives you unlimited creative freedom, and solves the long-standing limitations of existing frame and panel door construction.


This one of a kind solution allows you to create extended tenons for extra door joint strength, adjust groove width for different panel thicknesses and choose from a variety of material thicknesses for your stiles and rails (5/8" to 1-1/4"). Optional add-on cutters increase your bits' capabilities even more, allowing you to create glass panel and double sided profile doors.

> Four profiles are available; Round Over (#99-760), Ogee (#99-761), Round Over Bead (#99-763), and Bevel (#99-764).





To find more information, please go to: www.freudtools.com/PremierRailandStile



Extended tenons for strong joints in larger doors

Glass & screen panel capability

Double Sided Profiles in thick stock

Others





Industry Standard Stub Tenons Joints











Sounding Board

Our bulletin board for letters, comments, and timely updates

Dazzling jewelry box grabs WOOD® magazine honors at show

Tom Thornton of Oceanside, Calif., won the *WOOD* magazine *Excellence in Workmanship* award for his jewelry box, shown *right*, at the 29th Design in Wood Exhibition at the San Diego County Fair. Tom made his 7×10³/₄×14" solid-wood box from African mahogany, maple, maple burl, and wenge. As with all of Tom's boxes, the front inset drawer opens via a button release.

Over 300 woodworkers entered projects in 22 classes, with \$20,000 in prize money awarded. The San Diego Fine Woodworkers Association annually hosts the Design in Wood competition. To see more winning projects from the exhibition, visit woodmagazine.com/designinwood.





We're looking for a talented craftsman

WOOD magazine has a full-time opening for the position of Design Editor at its shop and offices in Des Moines, Iowa. This individual will design and build projects for each issue of the magazine in a fast-paced and creative environment. The ideal candidate will be an enthusiastic self-starter with experience designing and building all types of woodworking projects, knowledge of computer design software, good communication skills, and the ability to demonstrate techniques for videos.

For more details on this opportunity, and to apply, go to www.meredith.com, click on Careers, and search for WOOD.

Article updates Issue 200 (October 2010)


If you're building the Luminous Display Pedestal on p. 62, mount the light socket to a junction box secured to the bottom, as shown at *right*, and tie the wires in an underwriter's knot inside the box (*inset*). This prevents accidentally pulling the bare wire tips from the light socket screws. When securing the wires to the socket screws, be sure to connect the polarized wire—it will have ridges or stripes on the insulation—to the silver-colored screw. Check your local electrical

codes before completing this project.

The garage shown in the drawing on page 43 is actually 14'x24'.

Issue 201 (November 2010)

If you're interested in buying Colt drill bits, found on page 78, go to the company's Web site (colt-tools.com) to find a full list of retailers under the "distribution" link.

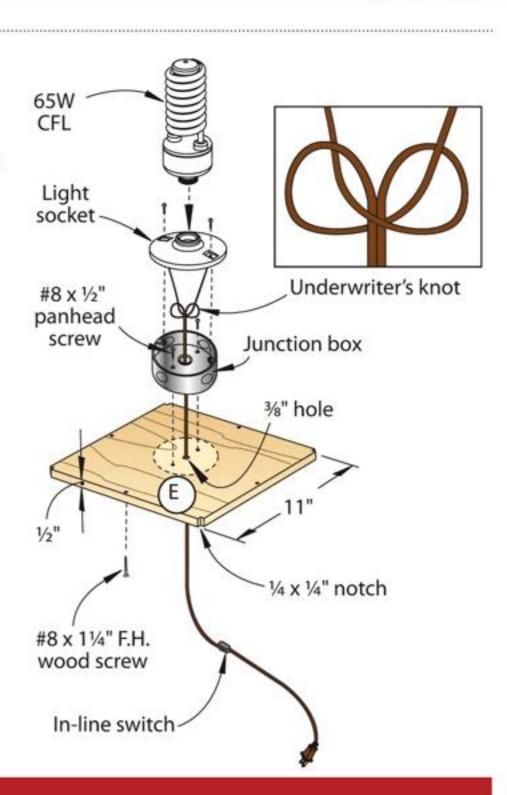

HOW TO REACH US

For woodworking advice:

Post your woodworking questions (joinery, finishing, tools, turning, dust collection, etc.) on one of our online forums at woodmagazine.com/forums.

■ To contact our editors:

Send your comments via e-mail to woodmail@woodmagazine.com; or write to WOOD magazine, 1716 Locust St., LS-221, Des Moines, IA 50309.

Subscription assistance:

To notify us of an address change or to get help with your subscription, visit **woodmagazine.com/service**. Or write to *WOOD* magazine, P.O. Box 37439, Boone, IA 50037-0439. Please enclose your address label from a recent magazine issue.

■ To find past articles:

See our index at woodmagazine.com/index.

■ To order past issues and articles:

For past issues of WOOD magazine in print or on DVD-ROM, our newsstand-only issues, or downloadable articles, visit woodmagazine.com/store.

Updates to previously published projects:

For an up-to-date listing of changes in dimensions and buying-guide sources from issue 1 through today, go to woodmagazine.com/editorial.

Introducing a New Kind of Router.

With variable speed 11/4 peak HP, it has the power for tough jobs. And at only 4 pounds, and with a contoured gripping surface and a D-shaped base, the DEWALT compact router is stable and easy to control. The simple adjustment ring and the dual LEDs allow incredible accuracy. And the all-metal motor can means it s built to last. It s another great woodworking tool from DEWALT.





All Metal Motor Can for Durability



Dual LED Lights for Visibility



Easy-to-use Depth Adjustment Ring



11/4 Peak HP with Variable-Speed, Soft-Start Motor




12 Position Spindle Lock



visit dewalt.com/compactrouter

Shop Tips

Helping you work faster, smarter, and safer

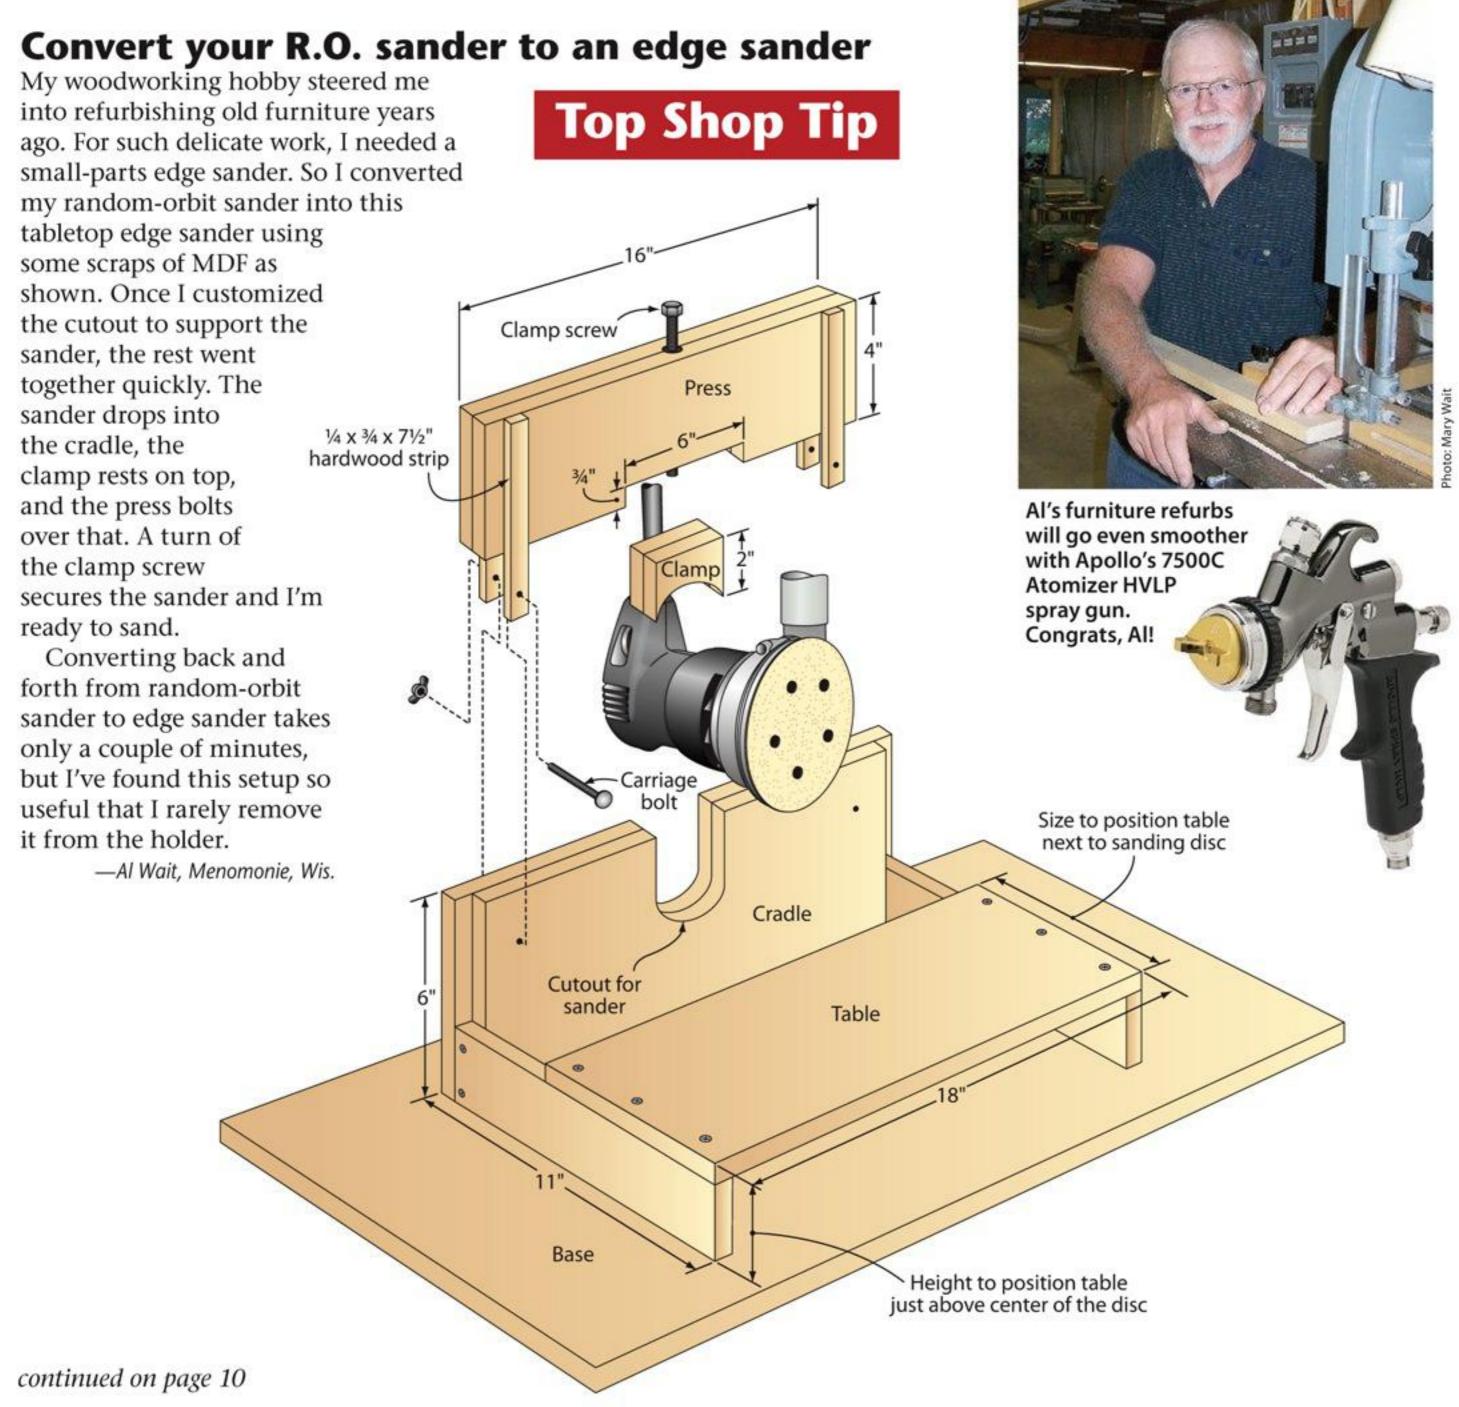

Your tips earn cash, tools!

Tell us how you've solved a workshop stumper. If we print it, you'll get \$100 and a copy of 450+ Best-Ever Shop Tips (woodmagazine.com/450tips). And, if your idea garners Top Shop Tip honors, we'll also reward you with a tool prize worth at least \$300.

Send your best ideas, along with photos or drawings and your daytime phone number, to **Shop Tips, WOOD Magazine, 1716 Locust St., LS-221, Des Moines, IA 50309-3023**. Or, by e-mail: shoptips@woodmagazine.com. Include your contact info in the e-mail.

Because we try to publish original tips, please send your tips only to WOOD® magazine. Sorry, submitted materials can't be returned.



The facts are hard to ignore. Titebond® III outperforms polyurethane glues.





As the leader in wood glues, we want you to know the truth about polyurethane glue and woodworking. A straightforward comparison between Titebond® III Ultimate Wood Glue and polyurethane glue tells the story.

Titebond® III is THE ultimate choice for bonding wood to wood. Period.




Shop Tips

Super-quick fix for stripped screw holes

The small screws needed for hinges strip out pilot holes easily. Fortunately a little cyanoacrylate (CA) glue fixes them just as easily. Simply fill the stripped hole with CA glue, let it cure for a couple minutes, and re-install the screw. It works for any size screw and any type of wood.

-Erv Roberts, Windsor Heights, Iowa

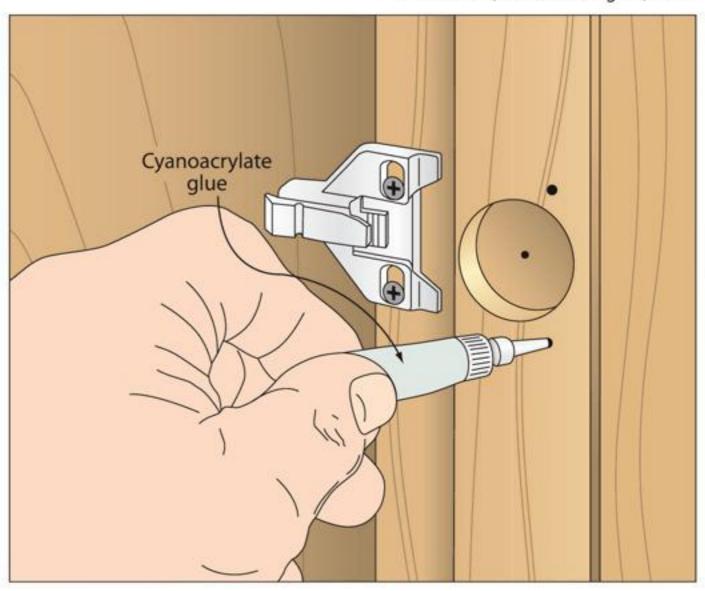


Predictable pipe clamp pads

You can buy more expensive ones, but pipe clamps are still my "go-to" clamp for large glue-ups. But the Achilles heel of the pipe clamp has always been the challenge of keeping clamp pads in place while you position the jaws. While this task is bad enough for a lay-down glue-up, it's a real headache when gluing vertically. I finally solved the problem by creating the magnetic wooden pads shown below.

To make a batch of pads, start by cutting out 2" squares of ¼" plywood. Next, drill a ½" hole ½" deep in the center of each pad. In the hole, epoxy a ½" rare-earth magnet (ten for \$9.49, item no. 30810, Rockler, 800-279-4441 or rockler. com). The pads cling to your clamps' jaws, and you can store them on any steel surface in your shop.

-Gordon English, Salt Spring Island, B.C.

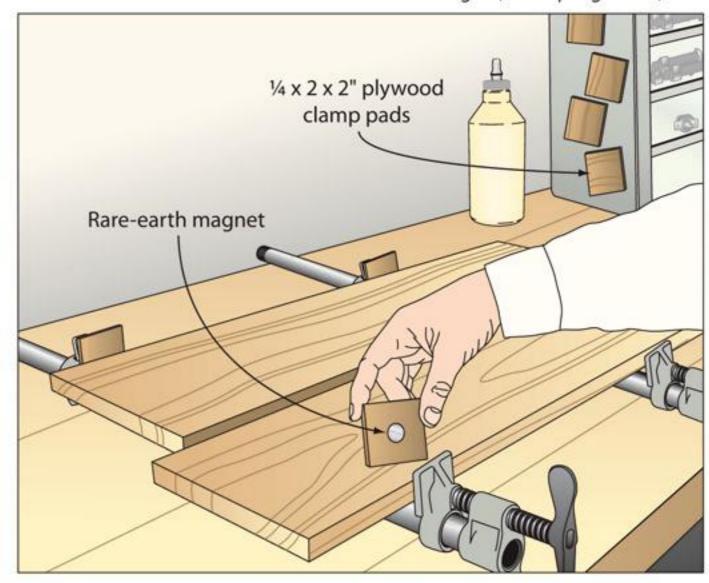

A hard hat for your benchtop


With all the time and money invested in the solid-maple top of my workbench, I want to protect it for as long as possible. So for potentially damaging tasks, this ¼"-thick, removable hardboard top protects the maple. After

cutting it to size, I clamped it to my table and used a Forstner bit to drill up through my bench's dogholes—all but the four in the corners, that is. On those, I just marked the center using the spur of the Forstner bit, and then screwed 3/4" dowels, 2" long, centered, on those marks.

Now, I can quickly move the protective top on and off as needed. When it wears out, it is easily replaced.

—Stan Morgan, Mapleton Depot, Pa.

continued on page 12

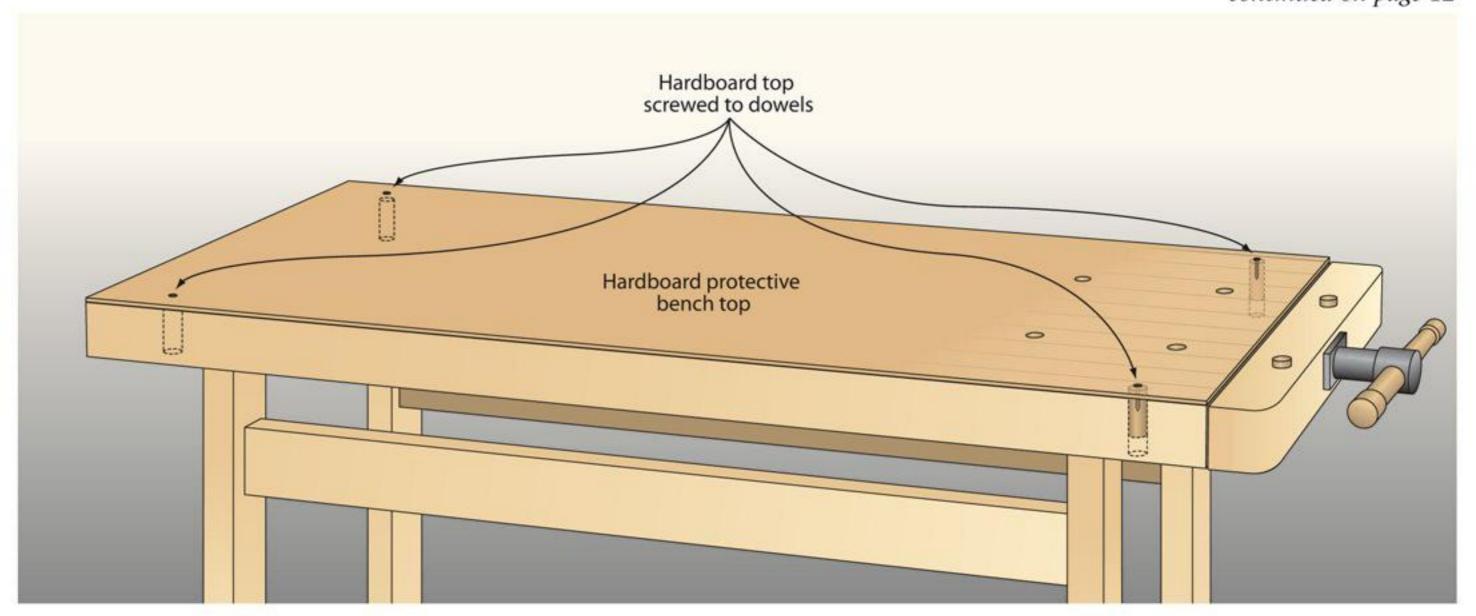

woodmagazine.com



Nanofiber eats the competition's dust!

(FREE with any Tempest Cyclone!)

The best value in dust collection is now the cleanest.

Our Tempest Cyclone Dust Collectors now include Nanofiber filters as a **FREE** upgrade (a \$54 value). Industry leading, Merv 15 rated Nanofiber filters, combined with our cyclonic separation process captures 99.98% of wood chips and dust particles to below 1/2 micron. You achieve near surgical quality air and cleaner tools, while practically eliminating dust clean up forever! What's more, Tempest Cyclones never clog, require almost no maintenance and come with a 5 year warranty.


- 2.5 HP 1450CFM \$995
- 3.5 HP 1700CFM \$1125
- Ask about our solutions for smaller shops starting at only \$295.
- 5.0 HP 1800CFM \$1395
- 2.0 HP Portable* 1025CFM \$895+ FREE Shipping

SAVE on any system you buy! PSI offers a variety of discounts and offers on dust collectors too numerous to list here. We're your complete resource for everything you need to get the job done right! To get the best deal on the system sized perfectly for your shop and number of tools, **call Bill at (215) 676-7606 x16.**

Penn State Industries

Top Quality, Great Prices, and Expert Advice! 800-377-7297 • www.pennstateind.com

PRECISION BUILT FOR FINE WOOD WORKING

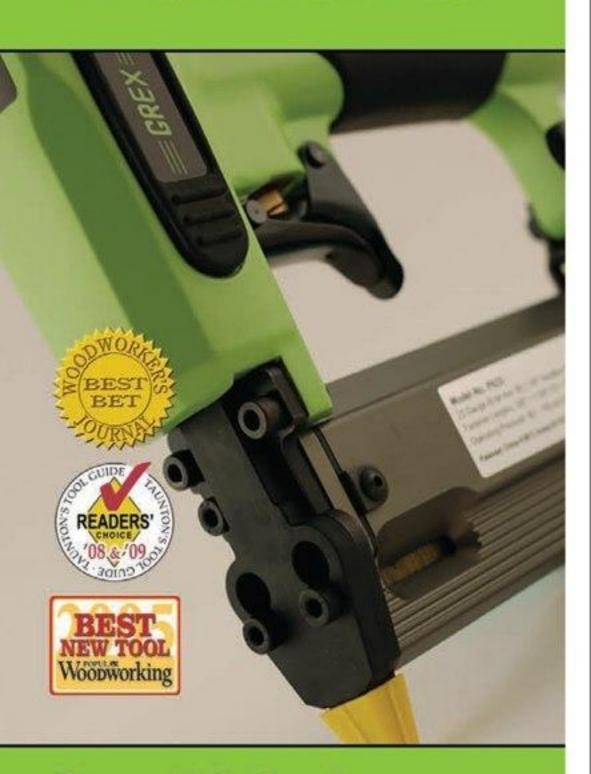

Grex P6 Series 23 Gauge Headless Pinners

The Invisible Fastener.
Up to 2" pins into Red Oak.





FIND YOUR DEALER


888-447-3926 905-838-4887


Shop Tips

Precisely place routers in insert plates

Here's a quick way to precisely center a router in a router table insert plate. After cutting the insert to the proper size, mark its center and drill a $\frac{1}{2}$ " hole there. With a $\frac{1}{2}$ " O.D. guide bushing mounted in your router's subbase—without the router attached—fit the bushing into the hole on the bottom of the insert and orient the subbase to ensure that the router controls are in reach and any through-the-table height adjustment holes are toward the front. Mark the locations of the screw holes, drill and countersink to fit the subbase screws, and use a $1\frac{1}{2}$ " Forstner bit to enlarge the center hole. Then, mount the router to the insert plate and you're ready to rout.

—Bob Hunter, WOOD® Magazine Tools Editor

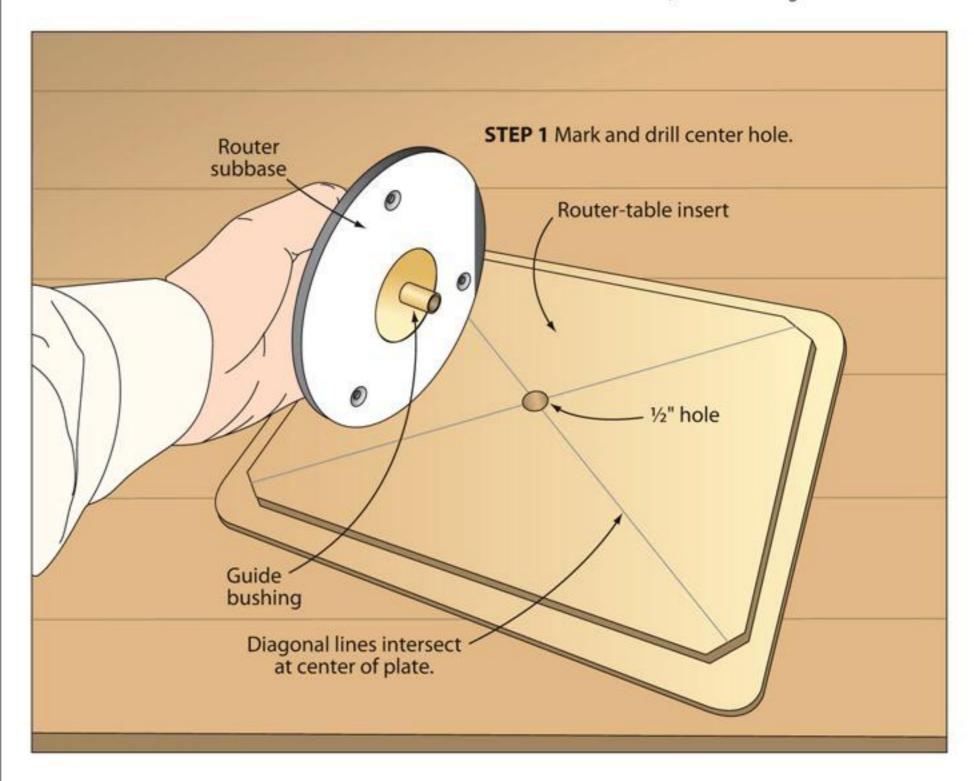

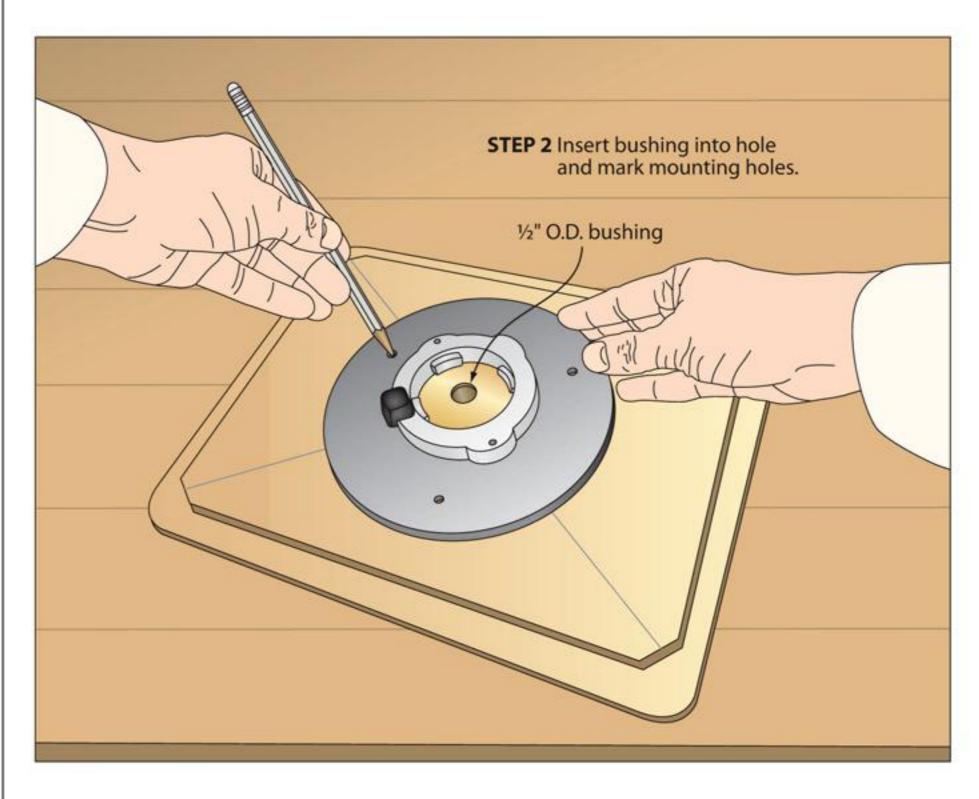


A recipe for biscuits in thin stock

When I needed to cut biscuit slots in the ends of 3/8" slats, it was necessary to hold them dead-solid and centered to keep the joiner's blade from blowing out a surface of the thin stock.

This guide jig uses a layer of MDF and two pieces of scrap stock to form a workpiece-sized slot that guides the slat end precisely into the joiner.


—Jim Culler, Bellville, Ohio

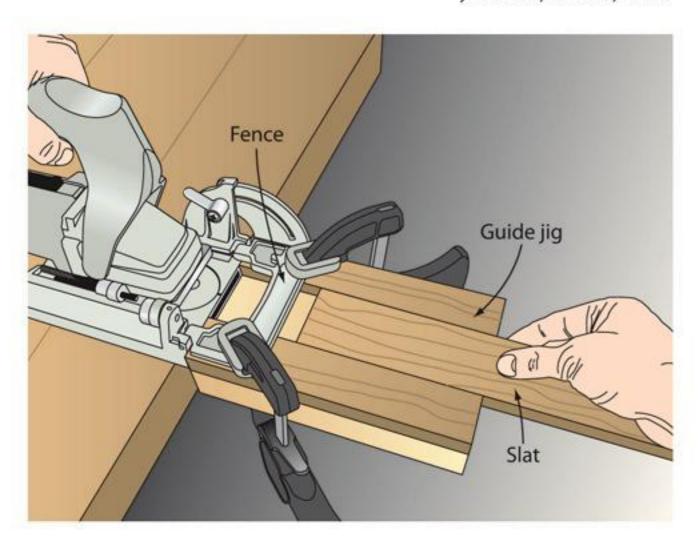

Just stick, square, and sand

To square my disc sander's table to the disc, I use an inexpensive welding magnet (\$4, Harbor Freight, harborfreight.com, item #1939). The powerful magnet holds the table at 90° while I tighten the table-locking bolt.

> —Michael Cyr, Westport, Mass. continued on page 14

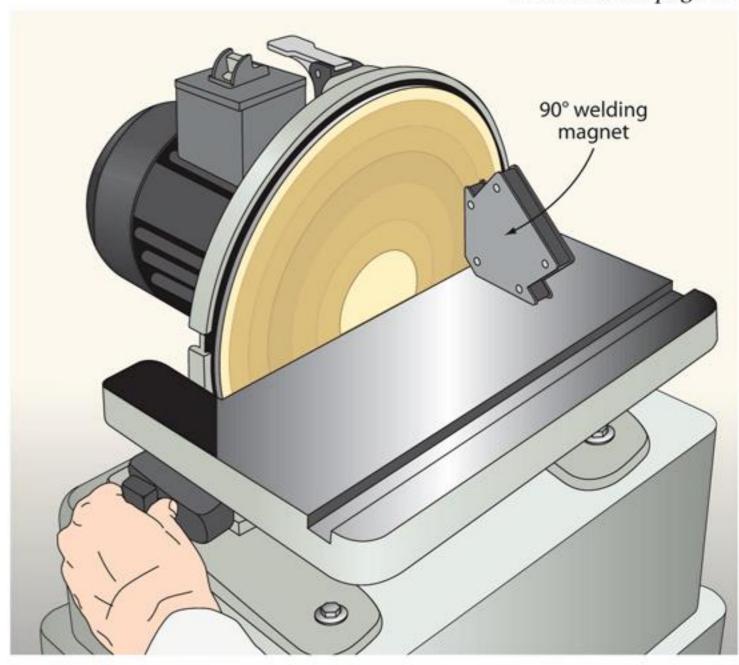

woodmagazine.com

13

Discover Pen Making

Handcrafted pens are the "go anywhere" conversation starter. As practical as they are beautiful, they also make great gifts.

So easy to make, no one will believe you made of this quality in about 15 minutes. And with over 275 pen kits and 300 wood and plastic blanks to choose from; the possibilities are endless.

We have helped thousands of woodworkers discover the joys of pen making. See for yourself why pen making is becoming one of the fastest growing trends in the home workshop.

Majestic Junior Rhodium Starter Set

(#PKMJJRFREE) Includes pen kit, bushings and accessories, a \$54.75 value.

Special price \$24.95

Save over 50%!

Use coupon code: WOODMJR

FREE DVD! (\$20.95 value)

Our FREE 45-minute instructional video is packed with all the information you need to start turning beautiful pens from day one!

Penn State Industries

Top Quality, Great Prices, and Expert Advice!

Step 1: Apply glue to pen tubes and insert into blanks



Step 2: Mount pen blanks onto the lathe blanks to desired with pen mandrel



Step 3: Turn the pen shape



Step 4: Sand and finish



Step 5: Assemble the pen



is ready in about 15 minutes

Your hand made pen



Save up to \$140 when you buy a 12" Turncrafter Commander Variable Speed Midi Lathe Pen Making Starter Set (#TCLC12VS-A). Save an additional \$15 by using coupon code: WOODTCL12. For details visit our website.

> Order by phone: 1.800.377.7297 Order online: www.pennstateind.com/w2 Penn State Industries 9900 Global Road Philadelphia, PA 19115

☐ Yes send me the FREE DVD! packed with all the information you
need to start turning beautiful pens.

- ☐ Yes send me the FREE Penn State Industries catalog
- 12"Turncrafter Commander VS Lathe complete starter set. Item: #TCLC12VS-A SAVE \$155 \$704.95 + \$68 S&H Coupon Code: WOODTCL12
- Majestic Junior Starter Set with FREE bushings and accessories. Item: #PKMJJRFREE SAVE \$29.90 \$24.95*

*add \$7.50 S&H if purchased separately

radine	3000 BEST 100 BEST 1	
Address		
Class	Chata	71


Limit 1 per customer at this price. Offer good in the Continental US only. es 4/1/2011. To receive these special prices use the coupon codes



You'll like the thinking behind our filtration system too, where we combine the power of our high-efficiency cyclone with the proven performance of HEPA filtration. Greater than 99% of waste is pre-separated, and clean air is returned to the shop through GE H12 certified HEPA filter media.

And you can stow the shop vacuum away, because the Smart Dust Collector does it all, regardless of the size of ports or hoses. For large, 4-6" dust ports, it provides much more air volume and pressure, 2 to 3 times that of a standard dust collector. And for small diameter hoses or woodworking tools with 3" or smaller dust ports, you'll get high suction, similar to a shop vacuum. It's a best-of-both-worlds design that collects the most dust possible.

Safety is enhanced as well, as this revolutionary unit includes a patent-pending Flame Guard Arrestor, with both passive and active fire safety features.

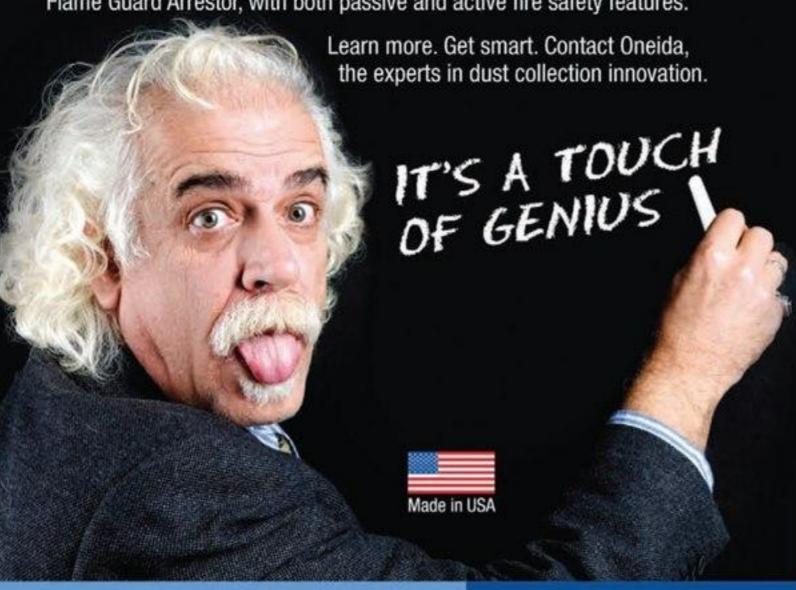

Order online at oneida-air.com

Call for your FREE catalog!

900 722 ADEE




Shop Tips

Big "V" pushes pull jig to higher level

As a woodshop teacher, I believe in "jigging up" to make projects easy and repeatable, especially because each operation will be repeated by 20-25 students in each class. That's why I loved your drawer-pull jig in the May 2010 issue (page 16). The version I use in my class has one handy improvement: A V-shaped centering window, as shown, makes the jig work even if the drawers are different sizes. Just center your line in the window, drill, and repeat.

—Shane Burk, Lubbock, Texas

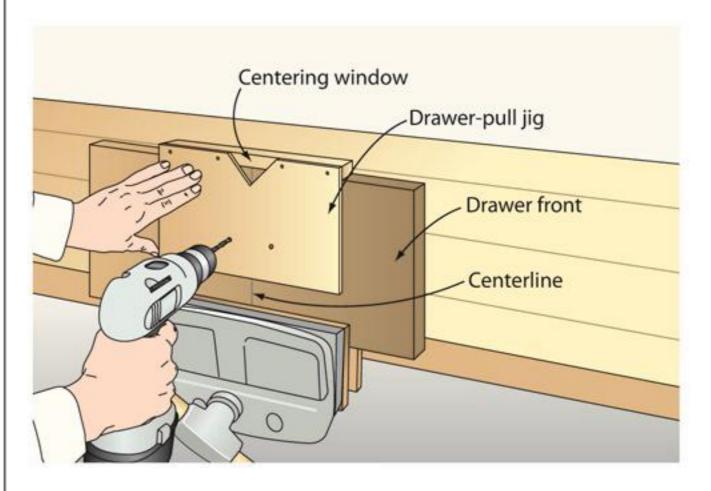


Skewers help fix an irregular joint

I found a beautiful old walking stick at a second-hand store—a natural growth branch from some exotic hardwood. The handle was broken off and was obviously going to require a dowel, but without a single straight or flat surface, lining up dowel holes proved next to impossible.

So, I drilled holes freehand as straight as possible and improvised a "dowel" from a bundle of bamboo cooking skewers. After adding epoxy to the holes, I poked the bundle in place, and fitted the pieces together. The skewers flex to offset any inaccuracies in my drilling.

—Thomas Rockey, Northfield, Minn.

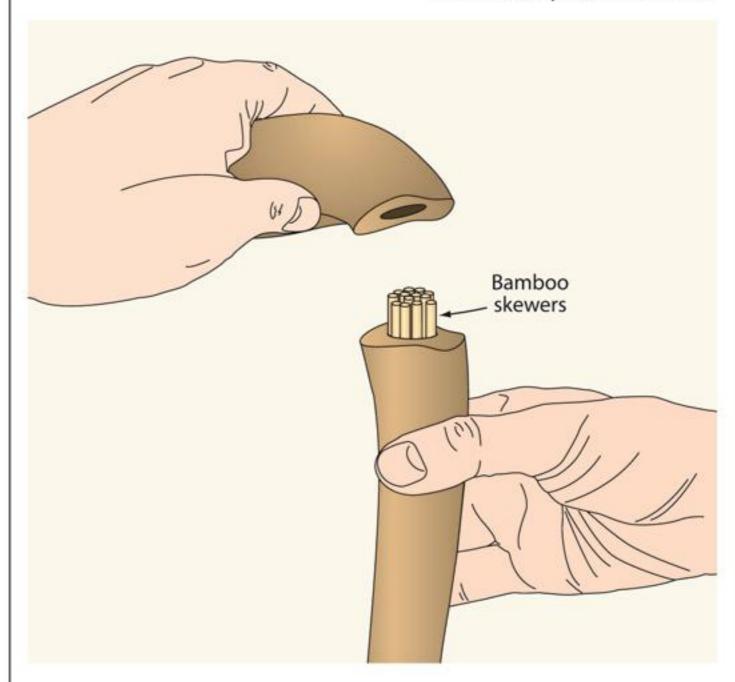


A fresh use for a flush saw

I've tried every possible method for trimming excess veneer-type edge banding. From commercial trimmers to razor blades, from block planes to sanding blocks, I inevitably either nick the plywood veneer of the shelf or split the banding.

Finally, I thought of using my flush trim saw with a 1" backing board clamped against the edge of the shelf as shown. The excess trim comes off quickly without marring the plywood veneer and the edge banding tidies up easily with a sanding block.

—Joe Spurlock, North Vernon, Ind.

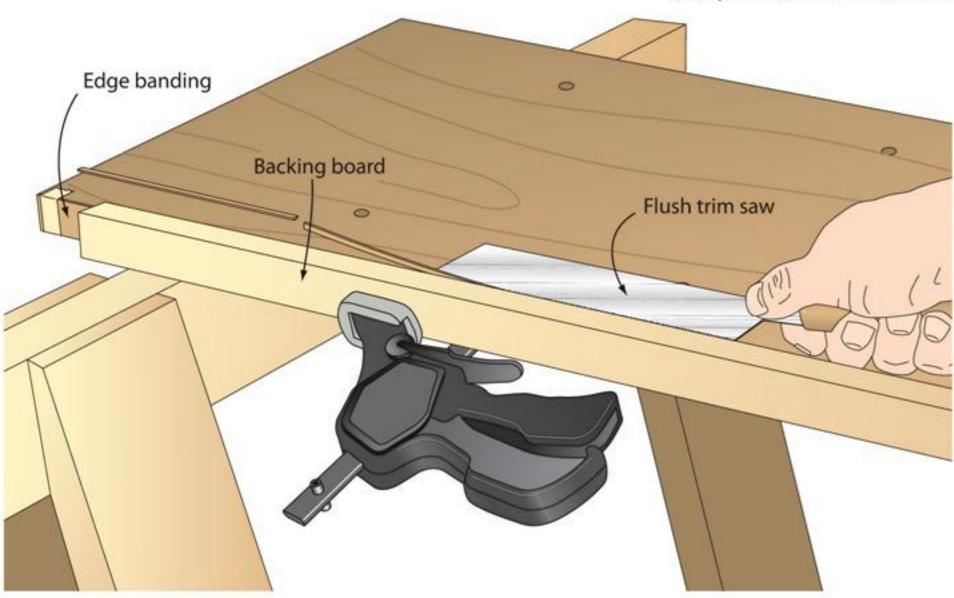


Big round-overs without big-money bits

Sometimes I'll run into a project plan that calls for a large and expensive round-over bit. Rather than shelling out for a router bit that I might use only once, I turn to PVC pipe for a low-cost solution. It comes in a variety of standard sizes and when quartered on the bandsaw, becomes a quick, curved sanding block. $1\frac{1}{2}$ " I.D. pipe yields a $3\frac{1}{4}$ " round-over, 2" I.D. pipe yields a 1" round-over, and so on. A $5\frac{1}{2}$ " length of the quartered pipe makes a good fit for a quarter sheet of 100-grit sandpaper adhered to the inside with spray adhesive.

To start a large round-over on your workpiece, trim away excess wood from the edge with three angled cuts on the tablesaw—one at 45° and two at 22.5°. Then use your new sanding block to finish smoothing it round.

—Lenn Heighes, Loveland, Colo.

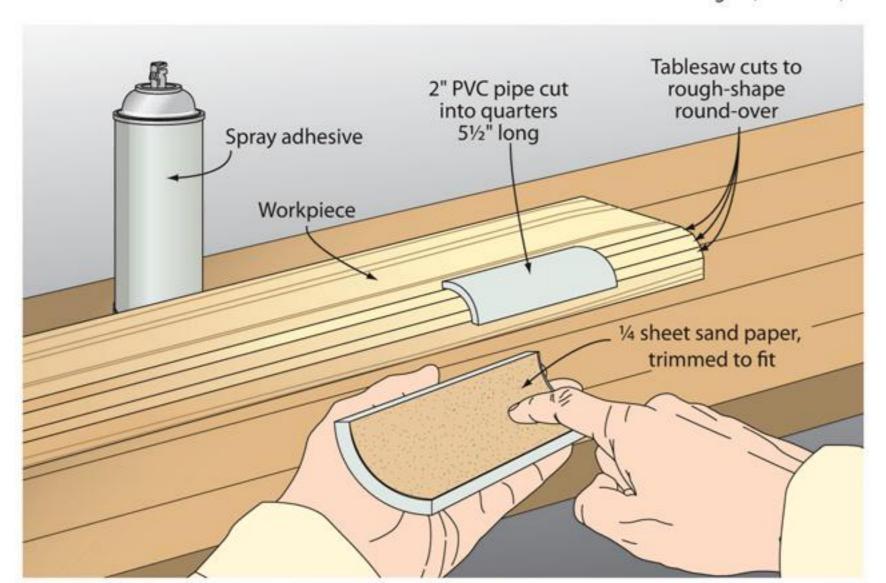



woodmagazine.com

15


Finishing School

5 Ideal Applications for Sanding Sealer

f you routinely apply sanding sealer before finishing, you may be taking an extra, unnecessary step. Truth is, any film-forming finish works as a "sealer" because it closes off the pores of the wood and lays a base for the topcoats. So most of the time, you can seal wood using the same finish you'll use for additional coats.

Some situations, however, benefit from a sealer. For example, when refinishing furniture with lacquer or polyurethane, silicone on the surface can cause the new finish to pull away from the contaminated spots—a condition called fisheye. In this case, applying a thin sealer coat of shellac (which isn't affected by silicone) separates the silicone contaminant from the topcoats.

Here are five more ways sanding sealer can save you time and trouble.

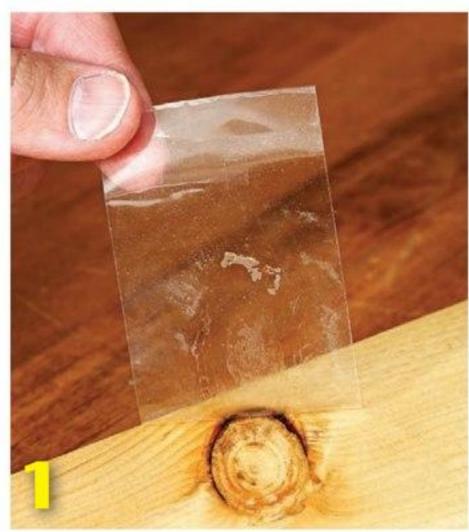


SEAL KNOTS FOR A BETTER BOND

Resins in pine and the oily surfaces of some exotic woods, such as teak, prevent film finishes, such as polyurethane, from bonding with the wood. When that happens, the top coat can separate as it did on the strip of tape shown above. However, a thin coat of shellac, like the one shown top, seals in resins and oils to provide better grip for topcoats. (To choose the appropriate shellac, see the Shop Tip on page 18.)

PowerLift. The world's first Motorized Router Lift.

Only The PowerLift... lets you do true Hands Free Plunge Cutting.

Raise the spinning router bit into the wood... on the fly! No cranks or handles.

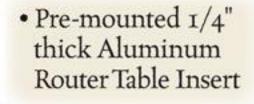



Only The PowerLift...

has a bi-directional Electronic Foot Pedal, that allows you to make micro-adjustments to a spinning router bit (within .005") for real precision.



DC motor action allows you to change the router bit above the table in seconds.



 Make repeatable plunge cuts for mortises and dados. The built in **Depth Stop** sets the maximum height the bit can protrude above the table.

Only The PowerLift has a Digital Control Panel (with mounting arm included), so you can set the speed, direction, and height of the lift.



 Tap the footswitch to make incremental passes, achieving clean cuts without turning off the router.

· Make your table a mortising machine. A jig that controls the work piece up top, combined with raising the spinning bit via the footswitch yields perfect mortises.

ROUTER NOT INCLUDED

PowerLift • #9450.....\$389.95

"Fast, Smooth Mortises"

Our solid carbide Spiral Upcut Router Bit Set cuts mortise and tenons cleanly and quickly. Long lasting micrograin carbide also cuts composites, laminates and more. The 1/2" shank bits are 1/4", 3/8" and 1/2" in diameter.

#200 \$69.95



The customizable Router Table Top with Fence features a 24" x 32" tabletop, miter slot, T-tracks, high split 36" long fence, and Aluminum Router Plate with guide pin.

Tabletop, Fence & Router Plate #2393.....\$189.95

PowerLift, Tabletop & Fence #2200 SAVE \$40.....\$519.95



MLCS 45 piece, carbide tipped Router Bit Set includes straight, round over, chamfer, cove, ogee, dovetail, round nose... 20 distinct profiles in all! Wood storage box included. FREE lube!






1/2" shank • #8374.....\$119.95

Now at MLCSwoodworking.com

1-800-533-9298




Finishing School

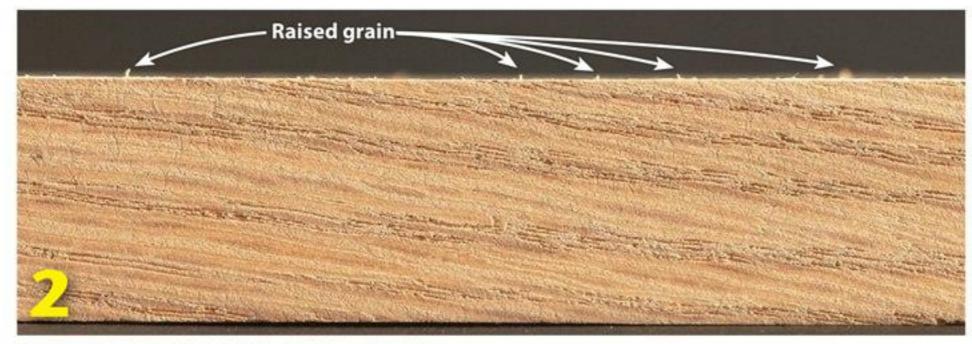

STOP THE PAIN OF RAISED GRAIN

Water-based finishes tend to raise wood fibers more than oil-based finishes, especially on red oak. To minimize grain-raising and make the first coat easier to sand, apply a water-based sanding sealer before spraying or brushing on topcoats.

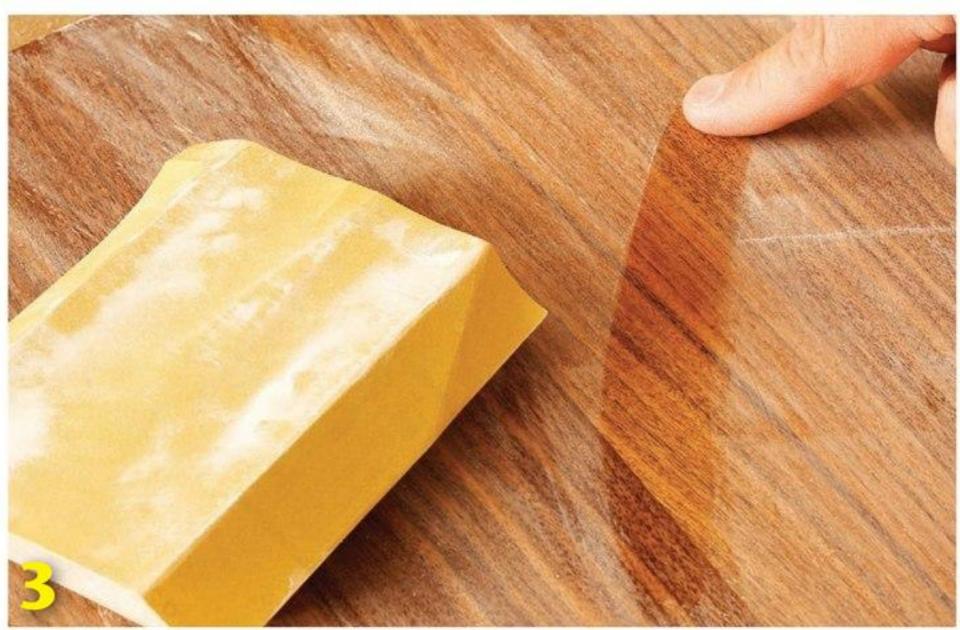

FINISH IN A FLASH WITH A FAST-DRYING SEALER

Instead of waiting a day between a sealer coat of poly and the first topcoat, speed up the process by first applying a fast-drying sanding sealer. This coat of sanding sealer, for example, dried hard enough to sand in an hour, giving us a jump on the first topcoat.

SHOP TIP

Select a dewaxed shellac for strong topcoat bonding

Although shellac can be used as a sealer under almost any other finish, not all shellac works well as a sealer. Unless sold as "dewaxed," shellac can leave behind a surface too slippery to bond with non-shellac finishes—especially polyurethane.

Before you buy premixed shellac, check the label (see example, below) to see if the contents can be used beneath other finishes. Or make your own shellac sealer by dissolving 2 oz of dewaxed shellac flakes in 16 oz of denatured alcohol (a 1-lb cut).


APPLICATION: Stir well before using. Apply several thin coats with brush, pad or lint-free wiping cloth and let dry 1 hour before sanding with 220 or finer grit sandpaper. Allow any subsequent coats to dry at least 1 hour before sanding lightly and recoating. Not recommended for use as a sealer under polyurethane. When sealing wood under polyurethane finishes, use Bulls Eye® SealCoat™. DO NOT THIN.

Woodwork: Apply 1 or more coats. Let dry completely before sanding with 220 or finer grit



SEAL PORES BEFORE FILLING THEM

Filling pores helps you achieve an ultrasmooth surface for a high-gloss finish, but tinted pore fillers also color the wood surface. Before applying pore filler, first seal the entire surface using a sanding sealer and lightly sand off any raised grain. Now the excess pore filler will wipe away cleanly, staying only in the pores, without discoloring the wood.

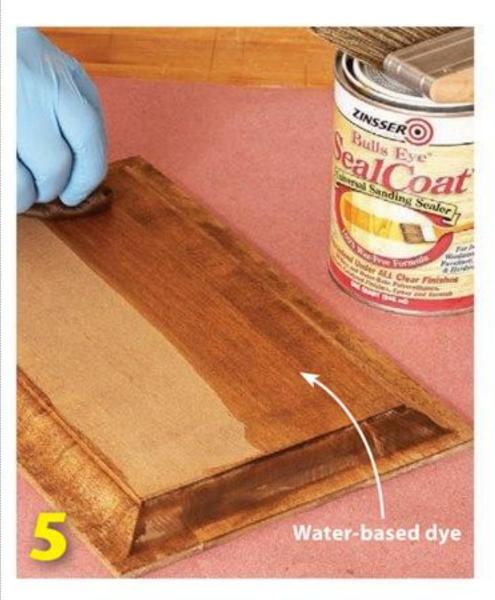

KEEP DYE FROM GOING BYE-BYE

Water-based dye provides a deep color, but unlike stain, it lacks binder to seal it in place. So when you top it with water-based finish, the dye can redissolve and contaminate the topcoat. To lock it in place, apply a thin coat of shellac over the dye. The alcohol in the shellac won't redissolve the dye.



Create with Confidence™



Faster, easier face frame clamping

Lightweight and compact, the new Rockler 3-Way Face Clamp features quick release and set up. Positioning a face frame on a cabinet carcass has never been easier or more exact. Able to clear a 5" wide frame this innovative clamp offers almost infinite adjustability. Get yours now and also use them to apply edging to extra-long table tops, and pre-installed counter tops or cabinets! Another Rockler innovation to help you Create with Confidence.



Order your 3 Way Face Clamp (39062) today for just \$34.99.

Call 1-800-279-4441, go to www.rockler.com or dial 1-877-Rockler to find a store near you! Use code V0384 to get FREE SHIPPING!

Materials code: 268

Just-Right Joinery

Sliding Mitersaw Joinery

Use your sliding compound mitersaw to cut accurate joints for outdoor projects. Don't own a slider? See issue 191, page 26, for how to do this with a portable circular saw.

Sliding mitersaws have pretty much replaced radial-arm saws in woodworking shops and job sites thanks to their lower cost, improved accuracy, and portability. Few users realize, though, that these machines also can make partial-depth cuts, such as those in half-lap joints, dadoes, or rabbets. You'll find a slider especially handy when building large outdoor projects made of hard-to-handle, big—and often wet—lumber.


The techniques we'll share here work with either a 10" or 12" sliding compound mitersaw. Before making any cuts, be sure to calibrate your saw's 90° and 45° miter settings using the manufacturer's instructions plus tips from "6 Methods to Maximize Your Mitersaw" on page 49. Now, let's make some sawdust.

Find your saw's limits


For through cuts, all mitersaws are designed to cut just below table level in front of the fence. But when you raise the blade for partial-depth cuts, the curve of the blade no longer reaches the fence [Photo A], also reducing crosscutting capacity.

To find exactly where the blade will cut, begin by setting the depth of cut—typically half the part thickness—using the saw's depth stop [**Photo B**]. (See the owner's manual.) Unplug the



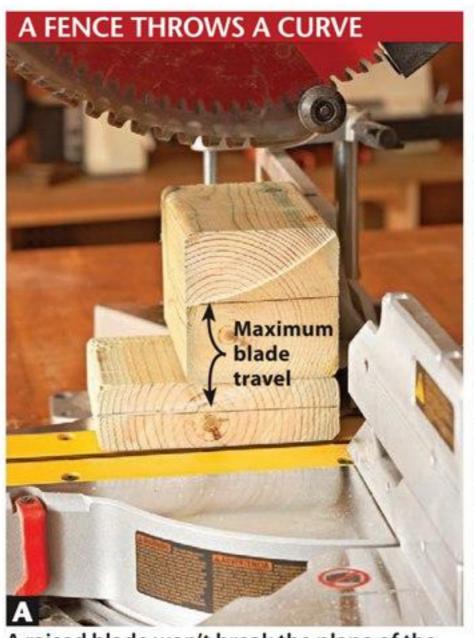

A raised blade won't break the plane of the saw's fence, leaving an arced cut on the end of a workpiece held against the fence.

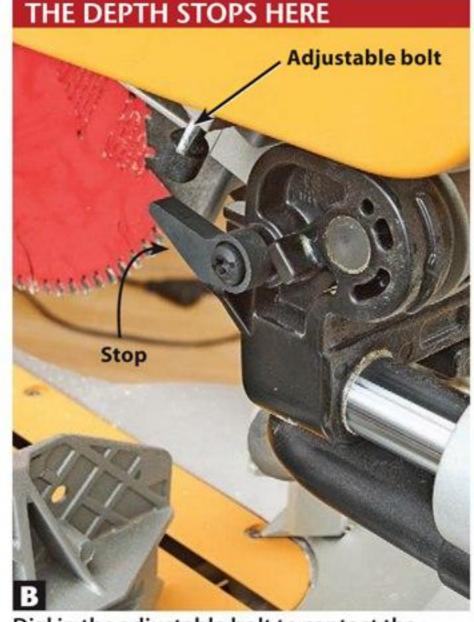

Dial in the adjustable bolt to contact the stop, effectively limiting the mitersaw's depth of cut.

continued on page 22

OUR WORLD IS VERY FLAT



FOR WOODWORKERS **BY WOODWORKERS**



TABLE SAW WITH GRANITE TOP

— TABLE FLATNESS WITHIN 0.008" (27" X 44")

TABLE SAW WITH CAST IRON TOP

— TABLE FLATNESS WITHIN 0.01" (27" X 44")

OUR NEW LINE OF TABLE SAWS FEATURES THE BEST FLATNESS SPEC IN THE MARKET.

- Price as low as \$499.99 Table material in Granite or Cast Iron
- Seamless table surface across entire table
- Extremely user friendly assembly (30 minutes)



Riving Knife







5-Year Warranty, 10-Year Granite Warranty!

Magnetic Insert

New Motor Mount Design

Seamless Table Top

IT'S A HELICAL GOOD PLANER

INTRODUCING THE WORLD'S FIRST PORTABLE PLANER WITH ACCU-HEAD CUTTERHEAD — WITH AN AMAZING PRICE UNDER \$600.




Steel City's 13" Deluxe Portable Planer 40200H features patented helical cutterhead with 2-sided HSS knife tips sharpened to perfect wood cutting angle which is not achievable in Tungsten Carbide application.


SPECIAL OFFER AT \$5XX.00 available with limited quantity. To reveal the actual price, please check with Steel City dealers.

For more details about our products and complete dealer listings, please visit: SteelCityToolWorks.com



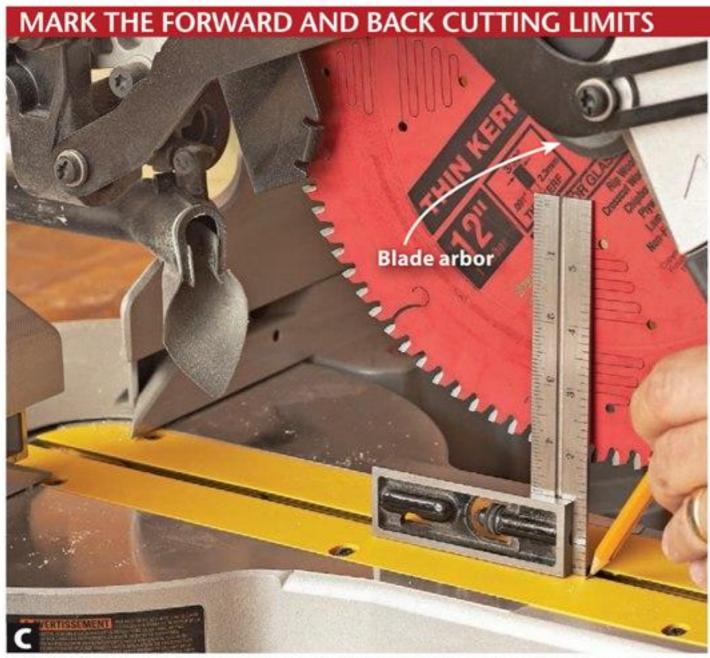

Using a square (or a square scrap of wood), transfer the far-forward arbor location to the saw table and mark it with a pencil.

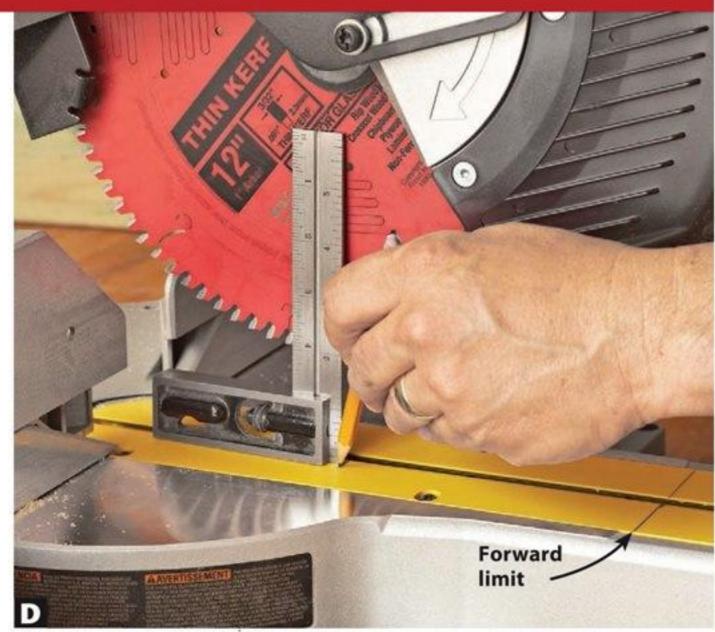


Repeat with the blade pushed back fully. The lines define the maximum width workpiece you can saw this way.



Holding the workpiece against the spacer, remove much of the wood waste from the joint with kerfs spaced about every 3/16".

saw and pull the blade toward you as far as it will go. Lower the blade to cutting depth and mark the saw table directly below the center of the blade arbor [**Photo C**].

Now push the saw all the way back and mark its blade center [**Photo D**]. The distance between these marks equals your saw's width capacity for that depth of cut. (For our saw, that equals about 6".) Measure from the fence to the back-limit line and rip a scrapwood spacer about ½6" wider than that dimension. Then use your saw's stock hold-down clamp (or double-faced tape) to secure the spacer against the fence.

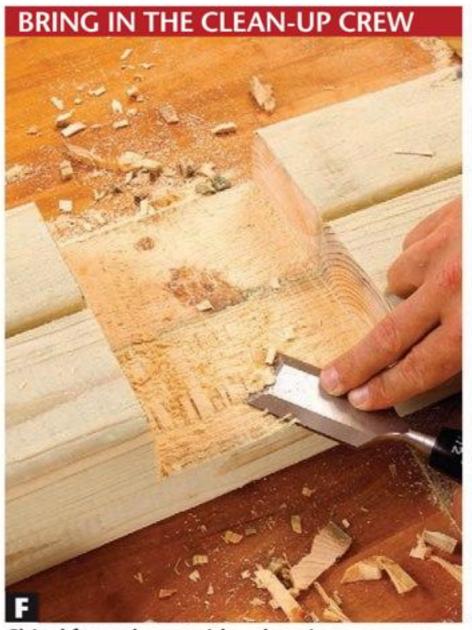

Chisel from the outside edges in to remove stubble left over from the waste wood. This leaves any uneveness hidden inside the joint.

Measure once, and then cut cut cut cut cut

Lay out the half-lap joint on your workpiece and hold it against the spacer.

Note: Depending on the saw, pushing the workpiece out this far from the fence might leave it with little support from the saw table. Supplement with infeed and outfeed support, if neccesary. Cut a kerf at both ends to define the joint.

Eliminate the waste between the end kerfs by cutting repeated kerfs between them [**Photo E**]. Use a hammer to break off the fingers of waste wood between the end kerfs. Now flatten the bottom of the dado using your widest chisel



This well-fit joint will look great on a deck, arbor, or other exterior project. As the lumber dries with age, it might open slightly.

[**Photo F**], a block plane, or a shoulder or rabbet plane. (See the video listed *below*, for additional details.)

Test the joint for a snug fit [**Photo G**]. For too-tight joints, saw the same amount of waste from both parts until they slide together with light taps from a rubber mallet.

MORE RESOURCES

FREE VIDEO

"Circular Saw Joinery," woodmagazine.com/circsawjoinery.

FREE RELATED ARTICLE

Cut half-laps and dadoes with a circular saw, woodmagazine.com/cshalflap.







To watch a DRYLOK video, snap this code with your smartphone



Got rust on your cast-iron machinery tops? Don't sweat it. Here's how to make them look new again.

ou can easily remove rust in one of two ways: Scrub with a commercial cleaner and an abrasive pad, or power it off using a spinning wire-wheel brush in a drill. Both methods work well, but with key differences you should know about.

Cleaners make quick work of even the toughest rust

Empire TopSaver, a commercial product, has a solvent-based, penetrating formula that breaks down rust. You simply spray it onto the affected area and scrub with a scouring pad or steel

wool. After a minute or two, wipe away the slurry with a clean towel [Photo A]. If any rust remains, repeat the process. TopSaver's formula also has a sealant that works to prevent rust from returning. Although it removes rust effectively, this product does not get rid of dark stains embedded in the cast iron.

Boeshield Rust Free attacks rust with a phosphoric-acid formula, so when applying it wear latex or rubber gloves to prevent skin burns. Spray Rust Free


onto affected areas, allow it to penetrate for 30 to 60 seconds, and then scrub with a scouring pad or steel wool [Photo B]. (If left on more than a couple of minutes, Rust Free will create dark stains that could become permanent on cast iron.) Repeat if necessary. This product removes the rust as well as dark stains, but it dulls the patina ([Photo D] on page 25). If you're cleaning only part of the top, this dull look will be noticeable.



Apply TopSaver, then wipe away the rusty residue before the solvent dries, which typically happens in 3 to 5 minutes.



Rust Free bubbles as it penetrates and breaks down the rust. It also emits a strong odor, so work in a well-ventilated area.

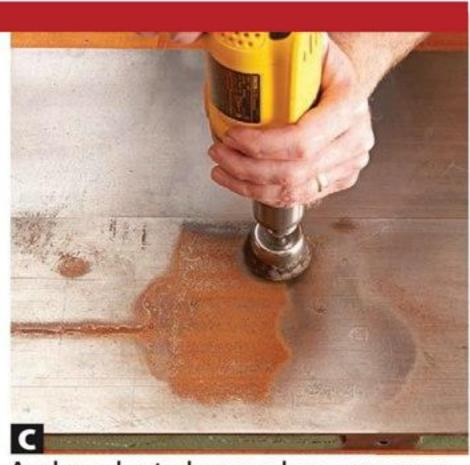

Apply moderate downward pressure as you run the drill at top speed. Keep it moving to avoid concentrated scratches.

Power away rust with common shop products

If you don't have either commercial cleaner, use a wire wheel in an electric drill to loosen rust particles ([Photo C] on page 24). Then wipe the surface clean with acetone. On light rust, this method proves about as quick as the cleaners.

A wire wheel works better than the cleaners on deep rust, though. Keep the spinning brush flat on the surface to avoid scratching the cast iron. If you should create scratches, you can remove them with 400-grit wet/dry sandpaper and a light lubricant such as WD-40. Switch to 800 grit and repeat the process if you still see scratches.

Now, seal the deal

Once you get your castiron top clean, apply a sealer, such as TopSaver or Boeshield T-9, to prevent rust from returning. Do it soon after cleaning; wait until the next day, and you could have quickforming flash rust to remove. Apply sealer every 2 to 3 months in humid climates, and every 6 months in drier areas.



All three methods removed the rust on our set of cast-iron tablesaw wings, each requiring about 5 minutes.


Sources:

TopSaver: 8 oz., \$18, Empire Manufacturing, 866-700-5823, empiremfg.com.

Boeshield Rust Free: 8 oz., \$11, PMS Products, 800-962-1732, boeshield.com.

Boeshield T-9: 12 oz., \$14, PMS Products, 800-962-1732, boeshield.com.



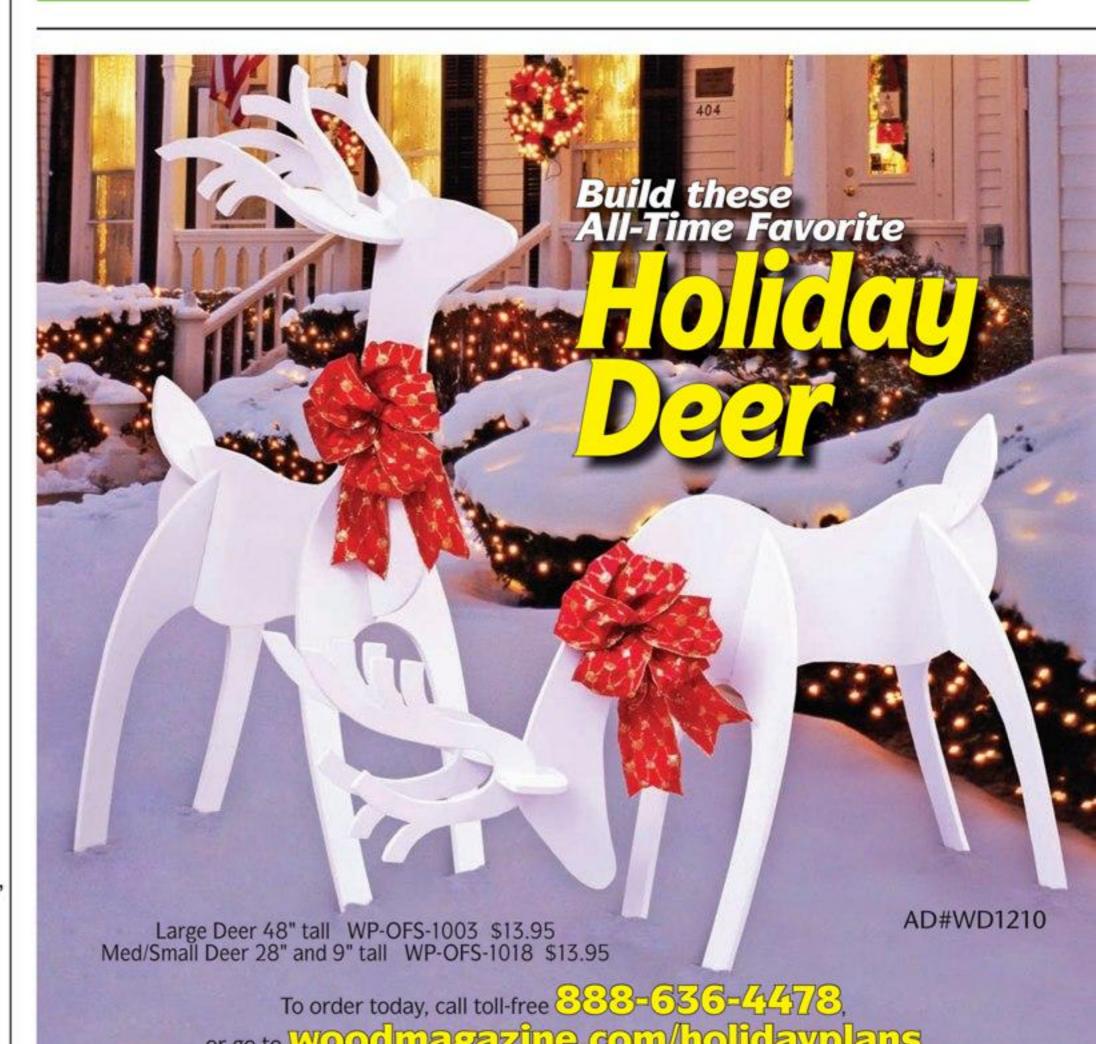

The Shop Monkey

Don't be afraid... he's trained.

Living in the Present

Keep your sanity during the holidays.



Unless you've successfully tried the tricky scrollsawing WOOD reader Don Stotts used to "curl" the wooden ribbon on this gift box, don't attempt it under a time crunch.

year! Oh, who am I kidding? More like the busiest and most stressful time of the year. Travel plans. School recitals. Gift shopping... It's enough to make you want to forget the holidays and go hide in the corner.

For us woodworkers, the pressure ratchets up even more. Friends and relatives drop hints about receiving something special from your shop. A cutting board. A picture frame. A Chippendale highboy with hand-carved ball-and-claw feet, brass drawer pulls and a flawless French polish...


After many years of offering—and being volunteered—to build holiday gifts, I offer the three most important gifting rules:

1 Start early. Every calendar has the holiday dates marked on them. So why do we often find ourselves sweating the last details (or whether the finish will actually be dry) mere hours before the gifts are to be given?

Instead, find gift plans and gather all of the supplies well in advance—no later than mid-November—and set milestones for yourself to keep the projects on track.

2 Build it small. Every summer, I picture myself building big holiday presents and saying, "Oh, it was nothing," as the recipients literally leap with joy. The reality is always quite different. Like the year I built a doll

cradle for my mom, only to find it was

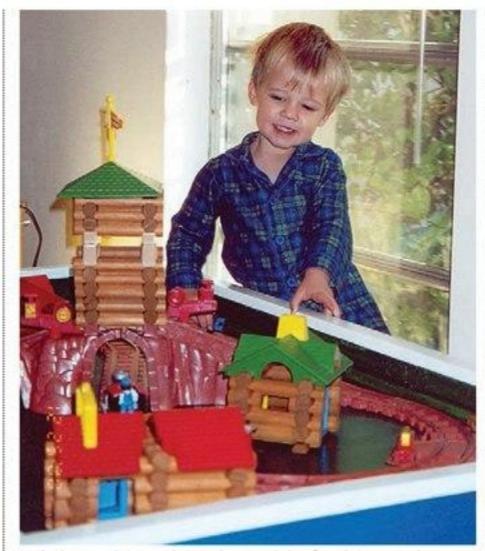

While making this play table for his nephew Tyler, the Shop Monkey had to work through a serious cold to meet his holiday deadline.


too large to carry on the plane, and too expensive to ship.

Before you start a gift, compare its finished dimensions to the sizes of flat-rate shipping boxes. Although this limits project size, it saves a lot of hassle when sending those items on their merry way.

Wanna impress relatives (and build skills) with some fancy joinery you've never tried before? This probably isn't the time. It may seem like just a simple twist on a classic joint, but can put you in a serious time jam. And with all the other

My advice: Fall back on tried-andtrue methods. If a project plan uses new

commitments during the holidays...

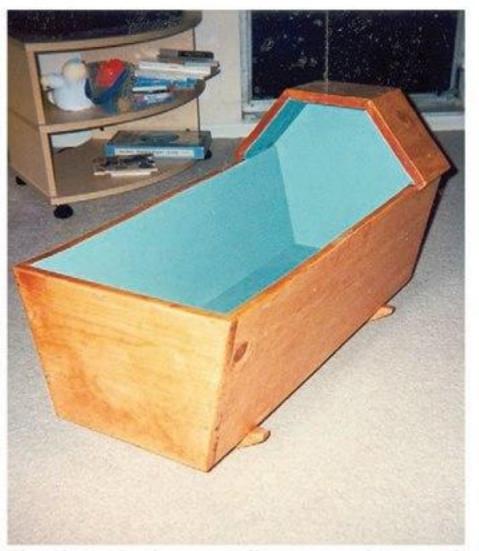

The Shop Monkey actually expected to travel with this doll cradle as carry-on baggage on an airplane one year.

techniques, simplify it with a less complicated method, or make a different gift altogether.

Finally, remember that building holiday gifts for others is a labor of love. It's not the project itself that matters, but the time, talent, and care put into it that will always show how much you care about the recipient.

And, isn't that what the holidays are all about?



The Shop Monkey

(aka Tom Iovino of Tampa, Fla.) blogs prolifically at woodmagazine.com/shopmonkey.

WODCRAFT®

For A Free Catalog Or To Find Your Local Woodcraft Store, Visit woodcraft.com Or Call 800-225-1153.

New Model FEIN MultiMaster Top Plus

With 40% more power than the competition and a soft grip handle, the new MultiMaster uses a broad assortment of accessory blades to handle hundreds of previously manual tasks. The MultiMaster doesn't rotate or orbit like other power tools. The secret? It oscillates - FAST!



Includes Over \$560* In Accessories!

- 250-Watt Variable Speed (11,000-20,000 OPM)
- QuickIn[™] Quick-Action System For Tool-Free Accessory Change
- 40% More Power
- Dust Extraction System
- Soft Grip For Operator Comfort

*If individual accessories purchased separately.

Special Offer!



Purchase any FEIN Tool or Accessory totaling \$200 or more and receive a \$25 Woodcraft Gift Card.

Offer valid November 24 - December 31, 2010. Gift card can't be used toward qualifying purchase.



11WI01P

Lumber Aisle

Why it pays to

Buy Good Plywood

Is it your imagination or is good plywood getting harder to find? Not if you shop smartly. Armed with these buying tips, you'll sort the stack like a pro to pick the perfect plywood for your next project.

It's what's inside that matters

When evaluating a sheet of plywood, start by looking at its edge. Thin veneers of wood, glued and pressed with crossing grain directions—transform humble core woods into sheets that are wider, flatter, and more dimensionally stable than anything found in nature. But modern plywood manufacturing, especially overseas, has shifted from birch-only cores to other often-inferior woods at the expense of core quality and stability. When examining plywood, ask yourself: Are the layers straight, of a consistent thickness, and free of large voids? Irregularities in the core veneers can telegraph through to the thin face veneer and broadcast themselves during sanding and finishing.

Sight along the edge to check the sheet's straightness. A bow indicates unevenly dried core material that only warps more, as cutting the sheet releases internal tension.

Although the 13-ply construction of the leftmost sample is more forgiving of the overlapping core layers and voids than standard 7-ply sheets [**Photo A**, next page], the defects in this sheet are severe enough to telegraph as an undulating face, especially with a glossy finish. The superthin face veneers, around 1/50", would make sand-through difficult to avoid, and cross-cut splintering a near

This C3-graded red-oak plywood was sold in the home center as "cabinet-" or "furniture-grade" plywood. At a quick glance, the rotary-cut faces look decent. But close inspection of the edges reveals uneven core veneers, large voids, and a distinct curl.

certainty. In comparison, we'd have no such reservations with the second sheet.

One alternative to traditional veneer-core plywood, combination-core plywood, at *right*, eliminates worries about inconsistency and flatness by retaining the three center veneer plies and replacing the outer plies with medium density fiberboard (MDF). The MDF provides a smooth and flat surface immediately below the veneer faces.

Face facts

As strong as plywood must be on the inside, it must also be pretty on the outside. Plywood grading, as much aesthetic art as science, designates one face as the front and one as the back; grading is on separate scales. Most domestic hardwood plywood manufacturers use the Hardwood Plywood and Veneer Association's (HPVA) voluntary standards for grading. The front face, judged for uniformity of color and consistency of grain, receives an AA, A, B, C, D, or E grade; see chart on *next page*. For the back face, the grade is designated 1, 2, 3, or 4, with respectively less-restrictive allowances for defects and repairs.

Unless you need ultra-high-end (and high-cost) AA-graded hardwood plywood, stick with A1, A2, B1, or B2 for furniture or cabinets with visible faces. Rarely will a hardwood plywood dealer carry more than a handful of grades. Rather, at a well-stocked dealer, you'll find a selection consisting of a good-on-two-sides (G2S) grade, such as A1, along-side a lesser grade, such as B2, often in multiple species. A good-on-one-side (G1S) grade, like A4, might also be on hand, but retailers often only stock this in ¼" for case backs. Locally, we found ¾" A1 red oak plywood for \$70 per sheet, B2 for \$60, and ¼" A4 for \$36.

As you shop, keep in mind that softwood plywood for industrial and construction use is graded under a different system, with a two-letter grade—AB, BC, CD, etc.—along with an exposure rating. You often can find both the hardwood and softwood grading systems directly across the aisle from each other at the home center, so don't mix up the two.

Most domestic manufacturers stamp the grade directly on the plywood edge, but increasingly, foreign plywood comes without such a stamp. Confusing the matter further, many retailers prefer to use marketing terms such as "cabinet grade," "furniture grade," or "stain grade." When in doubt, explain your project to your plywood dealer and let him steer you to the proper grade for your applica-

Manufacturers of A1-graded plywood don't skimp on the core materials. This hardwood-store-bought sheet has consistently even core veneers and a plainsawn, slip-matched face. The price, 50% costlier than C3, *left*, is justified for projects that display both faces.

SORT	ING OUT PLYWOO	D GR	ADES
Front- face grade	Appearance	Back- face grade	Appearance
AA	Grain-matched face- veneer pieces show little contrast between pieces. Defects, if present at all, are nearly unnoticeable. Often special-ordered for high-end architectural installations.	1	Color variations and tight knots are allowed, but defects must be filled or repaired. A grade-1 back is approximately equal to a C or D face.
Α	Excellent for furniture, A-graded faces are similar to AA in quality. Any leaves are spliced for a pleasing blending of grain and color. Minor burls and pin knots are allowed but uncommon.	2	Color variations are not taken into account. May contain sound knots of less than 3/4" in diameter.
В	B is also useful for visible faces of furniture and cabinets, but will often display defects characteristic of the face-veneer's species.	3	Knotholes up to 1" in diameter permitted.
C, D, E	Respectively, larger defects, color variations, and repairs are allowed, but the grade is sound. These grades should be used where the face will be painted, or hidden altogether.	4	Allows many open defects. For use where the back will be hidden.

tion. But no matter the grader's judgment, check both faces to make sure they make *your* grade.


Much like hardwood, hardwood plywood comes in plain-sliced, riftsawn, and quarter cuts. But unlike hardwood, face veneer can also be rotary-sliced, a method in which the veneer is peeled off spinning logs, like a roll of toilet paper. This produces an unnatural, wide, swooping grain pattern [Photo B], but generally yields the most veneer of the cutting methods, producing the least-expensive sheet.

For non-rotary-cut face veneers, look for the glue-up pattern where the face veneers are matched on the plywood core, as you might match veneers on your own project [Photo C and D].

Written by: Lucas Peters

MDF layers

Combination-core plywoods combine the best qualities of veneer-core plywood (rigidity and screw-holding power) with MDF-core products (surface flatness and dimensional consistency) into a furniture-friendly sheet.

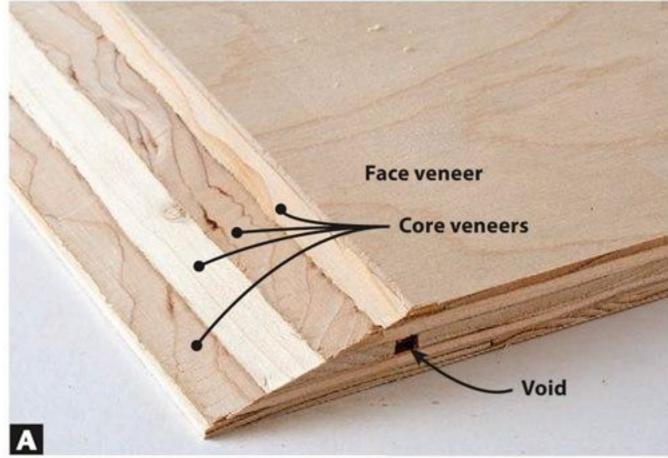

Thick face veneers of around 1/36" help compensate for any voids or thickness inconsistencies in the core veneers.



Rotary-cut veneer often produces an unbroken layer of veneer across an entire sheet of plywood that can look unnatural.



In a slip-matched face, subsequent pieces of veneer from the log are "slipped" out side-by-side to form a repeating grain pattern.



In a book-matched face, every other piece of veneer from the log is flipped, creating a mirrored-grain effect.

woodmagazine.com

4-WAY MONEY MAKER MOLDS PLANES SANDS SAWS



Own a 4-in-1 MOLDING FACTORY!

Quick-Change Molding Head



Commercial-Duty Thickness Planer



Power-Feed Drum Sander



Gang Ripsaw Attachment

Get Your FREE DVD & BUSINESS STARTER KIT! CALL TOLL FREE 1-800-821-6651

Woodmaster Tools, Inc. Dept. P354, 1431 N. Topping Ave., Kansas City, MO 64120 www.woodmastertools.com

Weedmaster 4-in-1 Melder/Planer
How To Start Your Own
HIGH PROFIT
MOLDING BUSINESS!

Get year
water market sight

FREST


Add versatility to your projects with our new Table Slides.



YOUR NEW SOURCE FOR TABLE SLIDES



This face launched 1,000 projects.

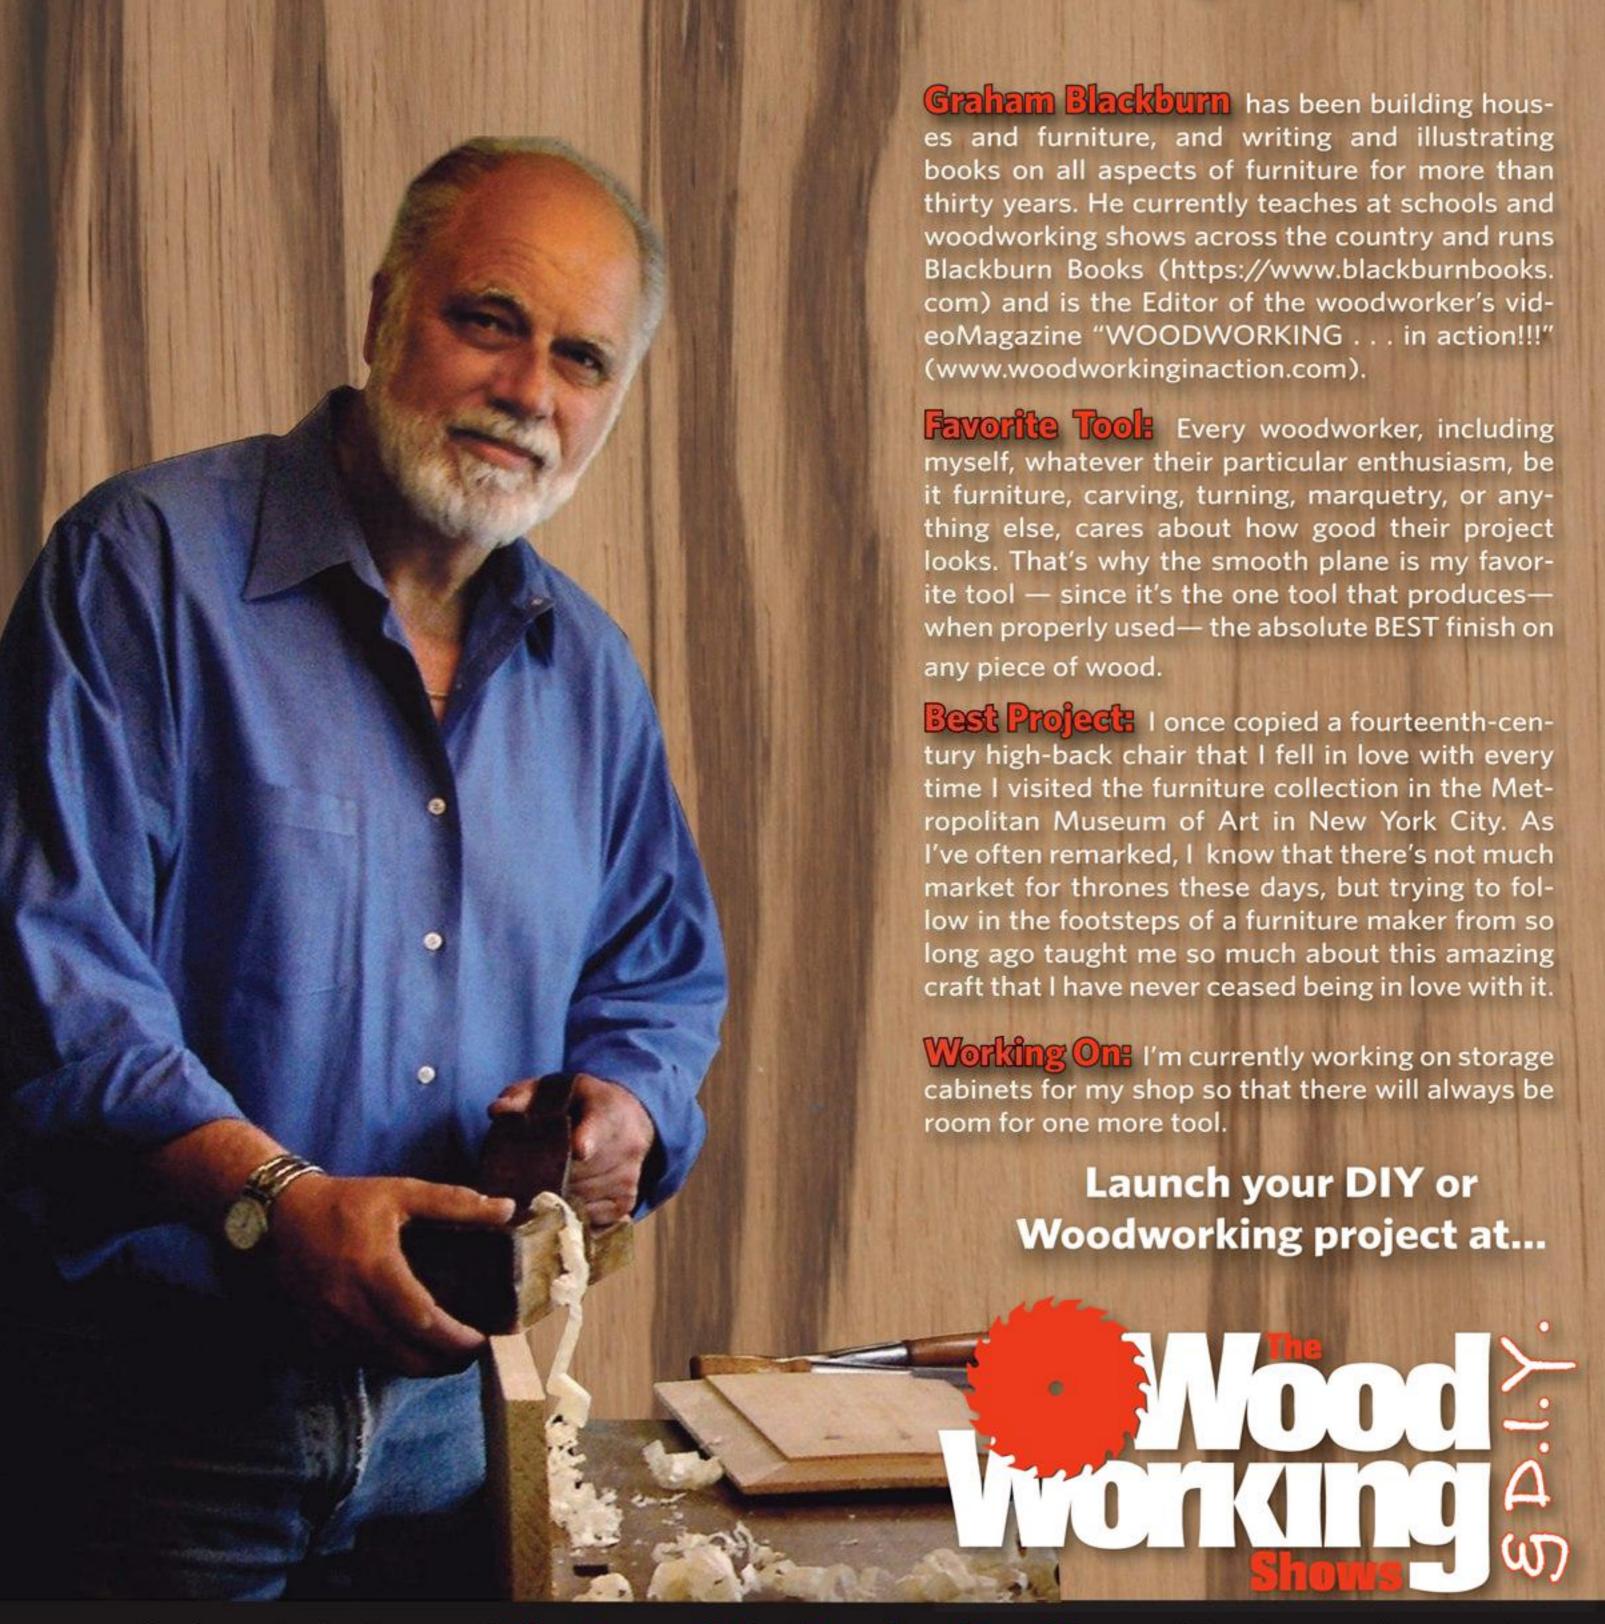

Graham is just one of *The Faces of The Woodworking Shows*. Meet more Faces at TheWoodworkingShows.com and find show info including FREE Education Schedule, Exhibitor info, Shop Tips, ShowOFF! Contest Guidelines, Club links, and more!

Coming soon to YOUR town!

Atlanta, GA Baltimore, MD Chantilly, VA Chicago, IL Columbus, OH Costa Mesa, CA Dallas, TX Denver, CO Detroit, MI Houston, TX Indianapolis, IN Kansas City, KS Milwaukee, WI New England Portland, OR Sacramento, CA St.Louis, MO Somerset, NJ Tampa, FL Twin Cities, MN

Great Ideas for Your Shop

Router-Table Dust Hood

Overhead cleanup when a straight fence just won't do

hen you're template or freehand routing, a fence-mounted dust port does no good. So for those situations, Todd DiOrio of Sipesville, Pennsylvania, designed this dust hood. Todd says, "It can be mounted anywhere on the table, and is secured at a single point in T-track so it easily pivots to the best position."

To make your own, use ½" plywood and follow the illustrations. If you don't have T-track in your router table, simply drill a pivot hole or two in your router top to accept the pivot bolt. Also, select a connector (we used a PVC fitting) to fit your dust-collection hose. And cut an appropriate-sized hole in the hood top for a tight fit of the connector. If the connector doesn't fit tightly, epoxy it in place. ?



PVC male adapter

(Select a fitting to fit your hose or connector.)


EXPLODED VIEW Trimmed to 1/2" long 4d finish nail 3-arm knob **HOOD TOP** 1/4" washer 31/2" 31/2" hole (Hole to fit your hose R=31/2" or connector) 5/16" slot 31/2" 193/8" 6" long 30° bevels Find more shop organizer plans at 1/4" bolt to woodmagazine.com/freeplans 4d finish nail fit your T-track 11/2" long

Relieves Joint Pain




e feel your pain. Trying to make an accurate mortise and tenon joint without spending an arm and a leg

on an expensive and elaborate jig setup can really give you a headache. But now General has developed the remedy. Our new E•Z Pro Mortise & Tenon Jig lets you cut a matching mortise and tenon with a single jig right out of the box! Just add a plunge router



prescription— our new jig is available over the counter for under \$100. Ruggedly made from hardened, aircraft-grade aluminum, General's M&T Jig is designed for years of reliable service and provides long-lasting relief.

Works way better than aspirin!

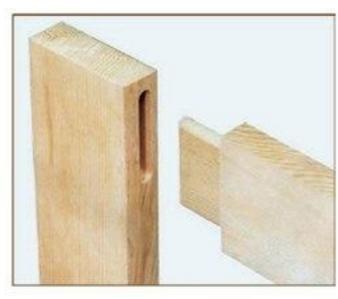


For more information on General's new Mortise & Tenon Jig and the rest of our E•Z Pro line of innovative wood joining jigs, visit www.generaltools.com/jointpain.




It's your job—General Tools make it easier.



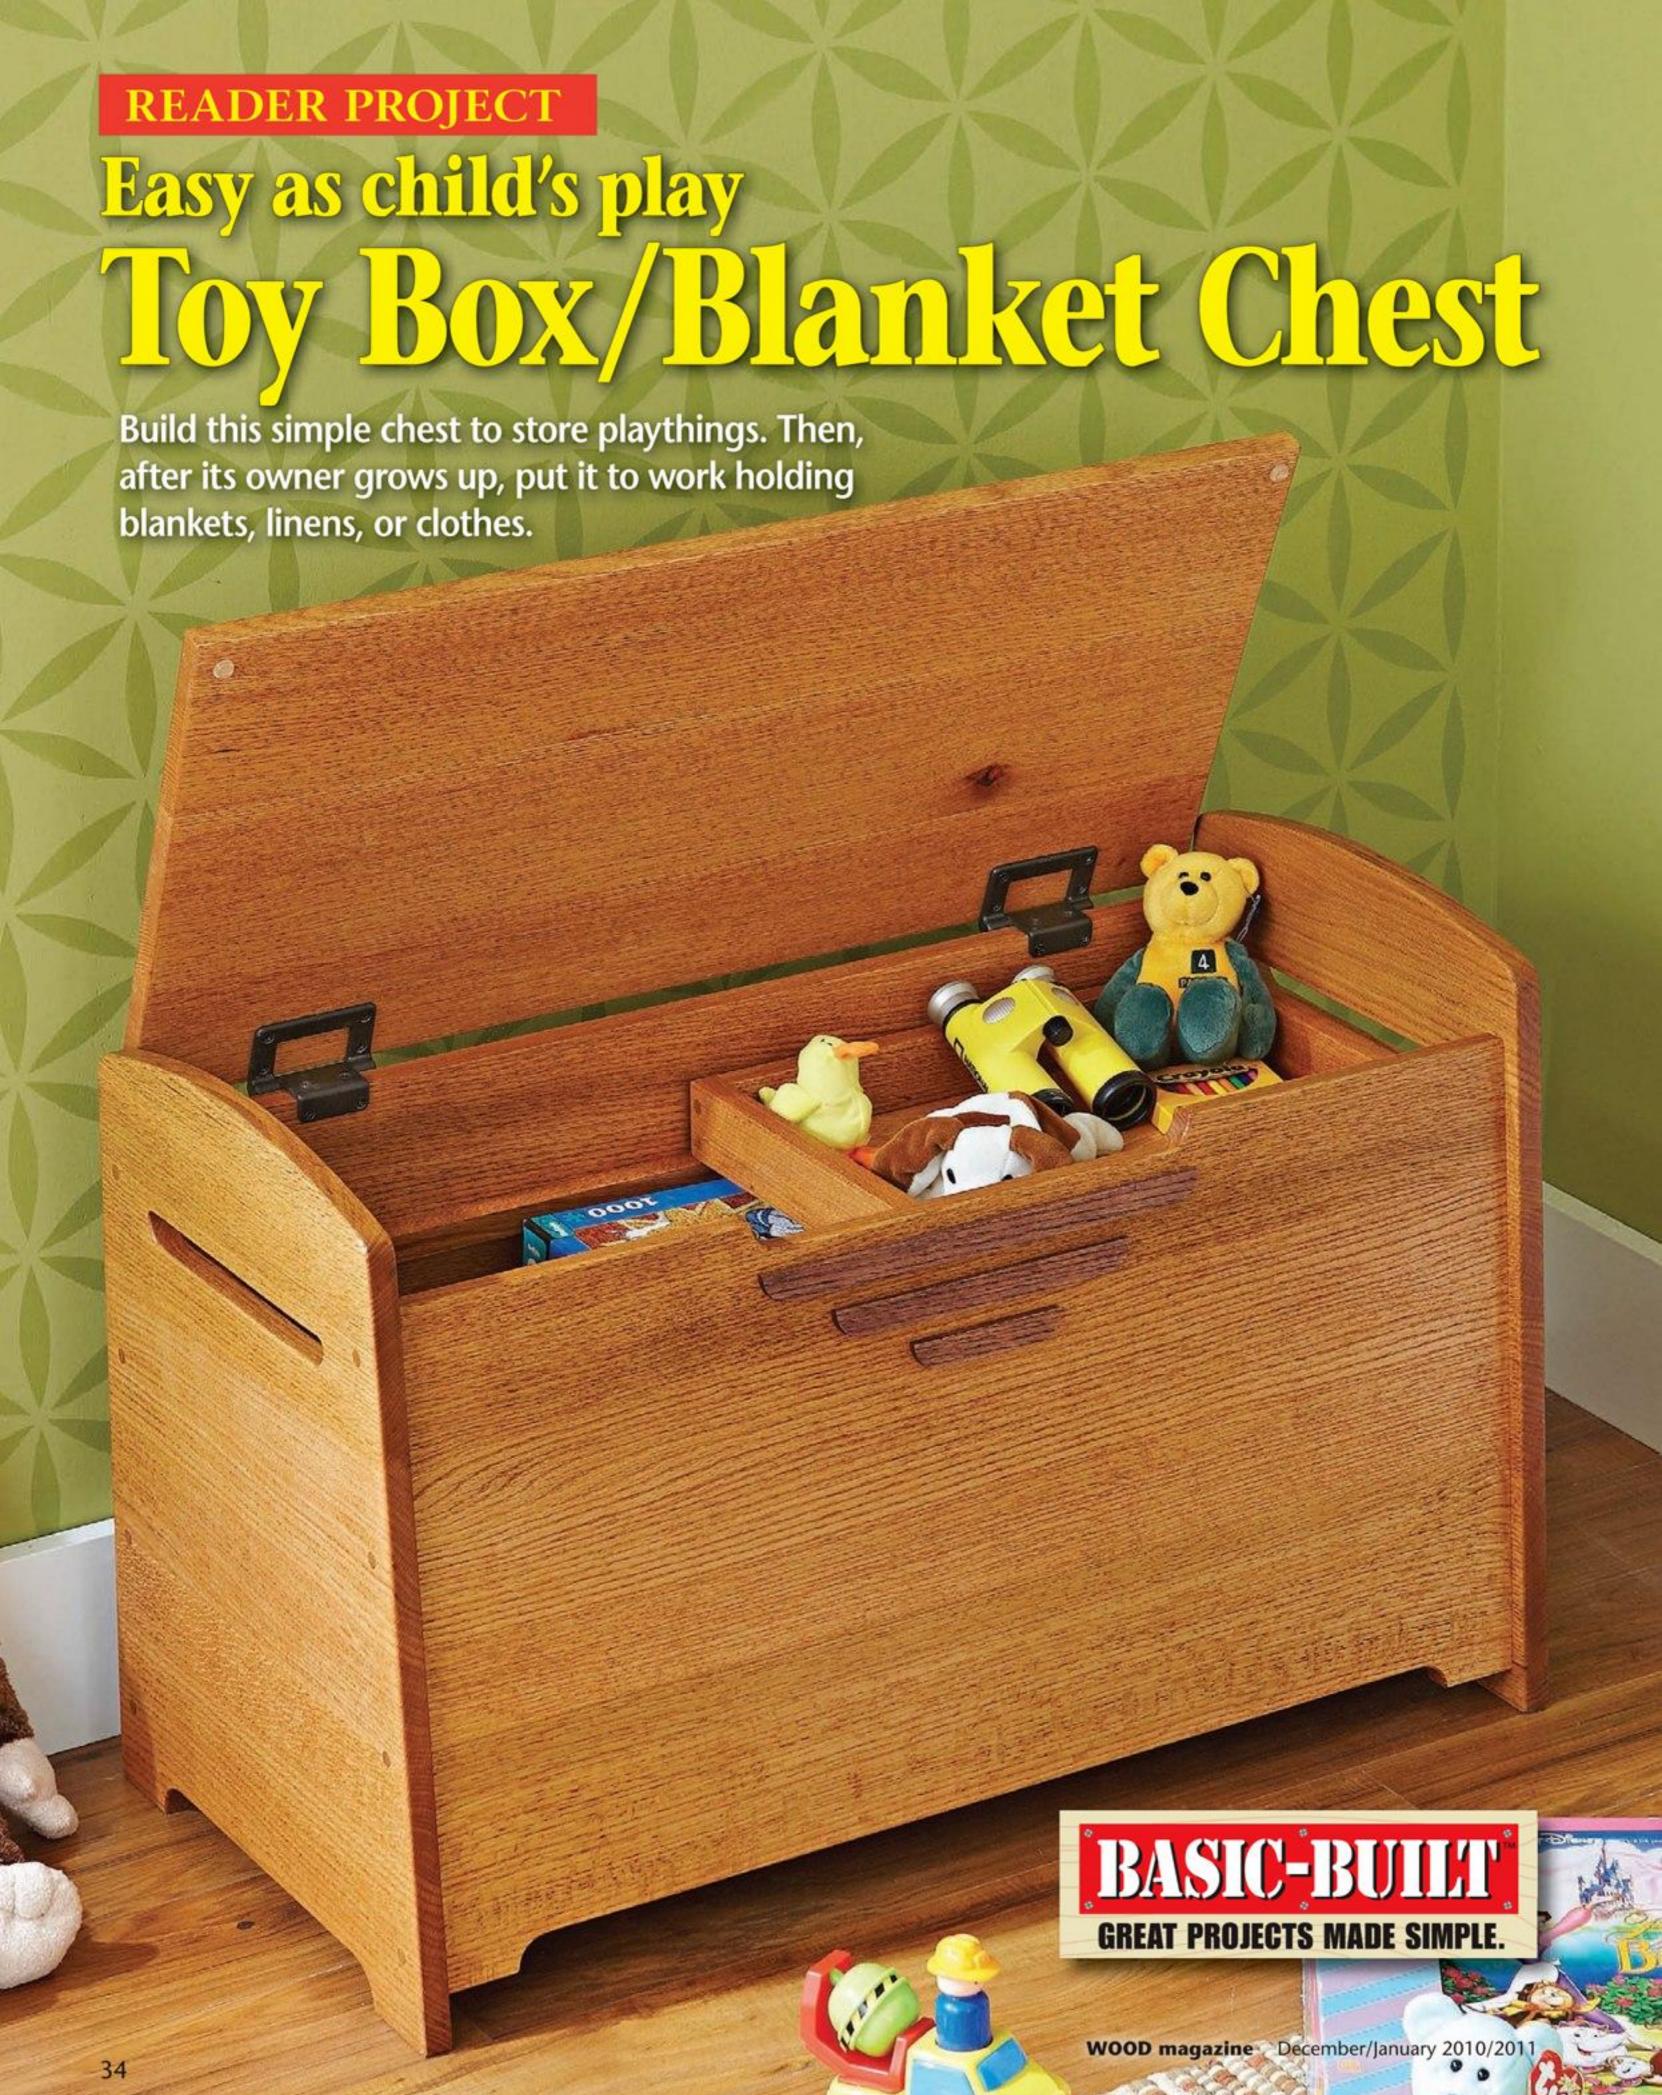


WHAT YOU'LL NEED

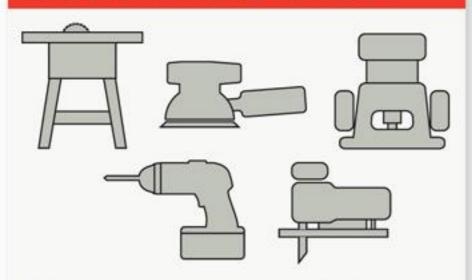


■ Materials: ¾" red oak, partial sheets of ¾" and ¼" plywood.

PROJECT HIGHLIGHTS

- Overall dimensions:
- 311/2" wide × 16" deep × 20" high.
- Sliding tray keeps smaller toys from being buried.
- Torsion hinges help prevent pinched fingers and other accidents.

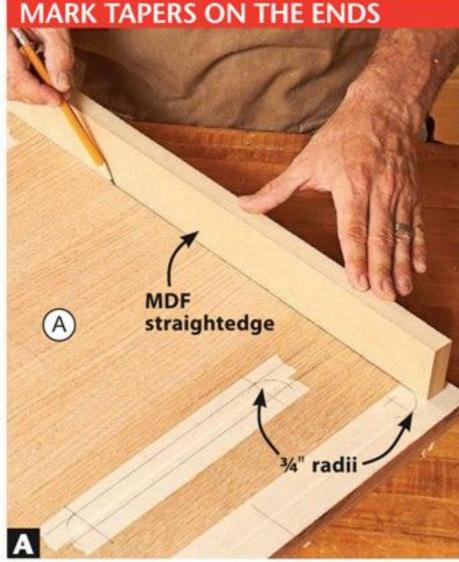

Use a straightedge to connect the outside of the 3/4"-radius mark near the top of a box end (A) to a corner at the bottom.

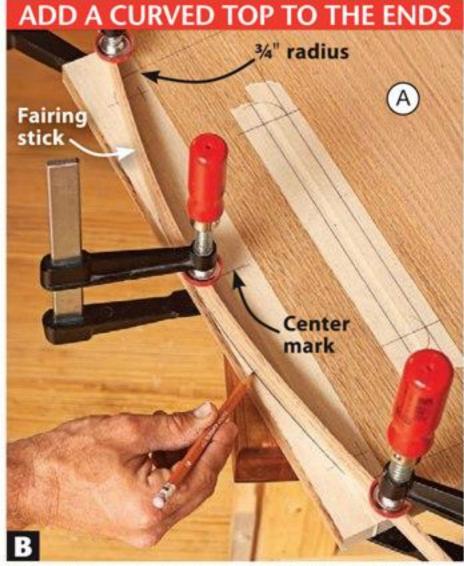

Clamp a fairing stick to the end (A) at the center mark. Then bend the stick at the ends to meet the circles at the corners.

eader Bill Nolan, right, of Des Moines, Iowa, designed this rugged box with solid-wood parts so it would handle kids scooping toys from it for generations to



come. And because he chose simple screw-together joinery, you'll have this toy collector built quicker than kids make messes. Below, Bill walks you through the process, sharing some of his best tips.


It's 'How'd he do it?' time

The ends (A), front and back (B), and lid (C) (Materials List, page 39). Quick Tip!—I'll give it to you straight. For the best appearance, I look for straight-grained stock, even ripping narrow lengths of straight grain from wider boards. The joint lines blend together, and the glued-up panel looks like one wide board. After the glue dries, sand the panels smooth and cut the parts to size. Cut the cleats (D) to size, then set the front, back, lid, and cleats aside.


20n an end (A), draw the shapes of the handle slot, bottom, and tapers [Drawing 1, Photo A]. Quick Tip! Tape-provides a clean layout. The open grain of oak pulls my pencil point away from a ruler. Masking tape provides a smooth layout surface—and reduces chip-out later when drilling and sawing.


3 Mark the center of the top arch on an end (A). To create a smooth curve, flex a thin scrap as a fairing stick, and draw the arch between the two ¾" radii [Photo B]. (See More Resources on page 39 for information about making and using a fairing stick.)

1 END VIEW

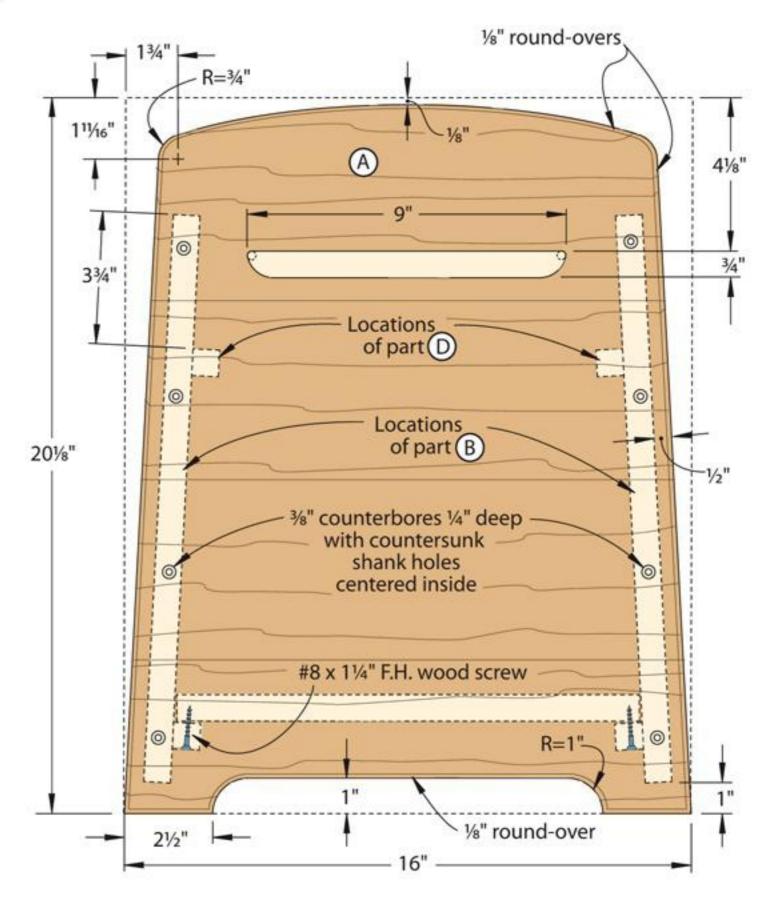


1a HANDLE-SLOT DETAIL

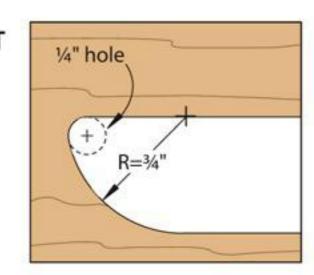

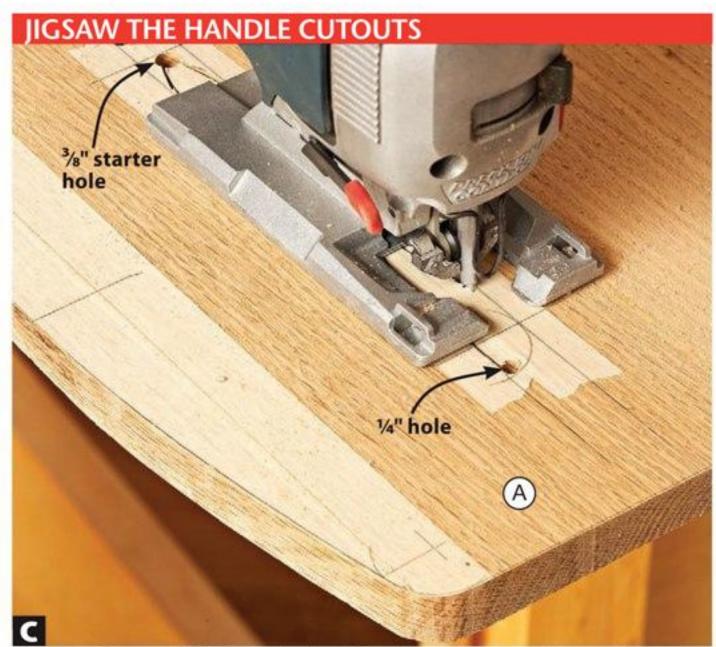

Starting from a 3/8" hole in the handle slot waste area, jigsaw the handle shape between the 1/4" holes forming the corners.

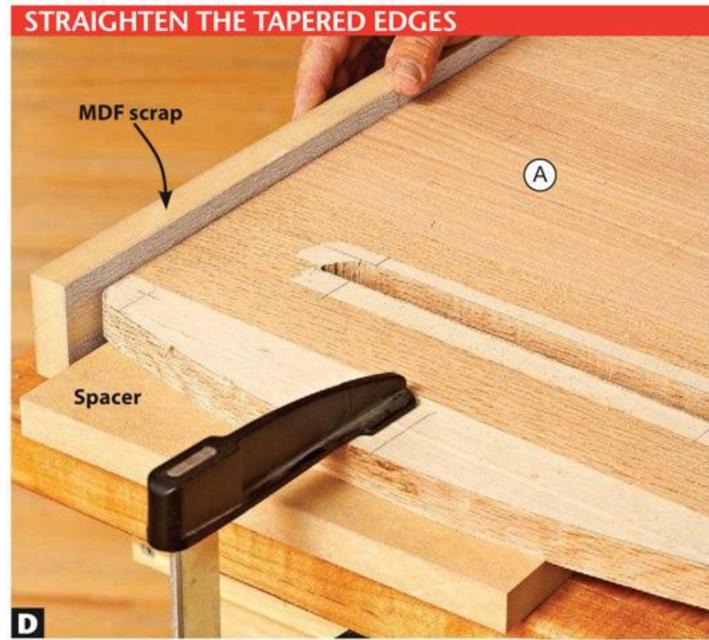

To sand the full thickness, clamp spacers under the end (A). Keep the edge square by running the sanding block on your bench.

Define the corners of each handle slot by drilling ¼" holes [**Drawing 1a**]. (See the **Shop Tip** *below* to make a simple drilling jig.) Then drill a ¾" starter hole [**Photo C**] and, using a jigsaw with a 20-tpi blade, cut out the handle slot. Wrap sandpaper around ¾" and ¾" dowels to smooth the handle opening up to 220 grit. Then adhere sandpaper to an MDF scrap and sand the tapers smooth [**Photo D**]. Repeat for the other end.


Setrieve the front and back (B) and apply masking tape to their bottom edges and the top edge of the front. Mark the cutouts [Drawing 2], jigsaw just outside the lines, and sand to the lines. Then rout 1/8" round-overs on the front, back, and ends (A) where shown [Drawings 2 and 3].

Glue and clamp the bottom cleats (D) in position on the front and back (B) [**Drawing 3**]. Sand the front, back, and ends (A) to 220 grit.

Now build the box

Lay out the counterbore locations on each end (A) [**Drawing 3**] but don't drill them yet. Rest the front and back (B) on 1" spacers and clamp them to one end. **Quick Tip! Use spacers as a third hand.** To create a perfect ½" inset for the front and back, I cut two 1×18" strips from ½"-thick MDF and double-faced-tape them to the ends (A) flush with the edges [**Photo E**]. Drill counterbored pilot holes and countersinks in the end and screw it to the front and back. (If your panels warp slightly, see the **Shop Tip** on page 38 for a solution.)


2 FRONT VIEW

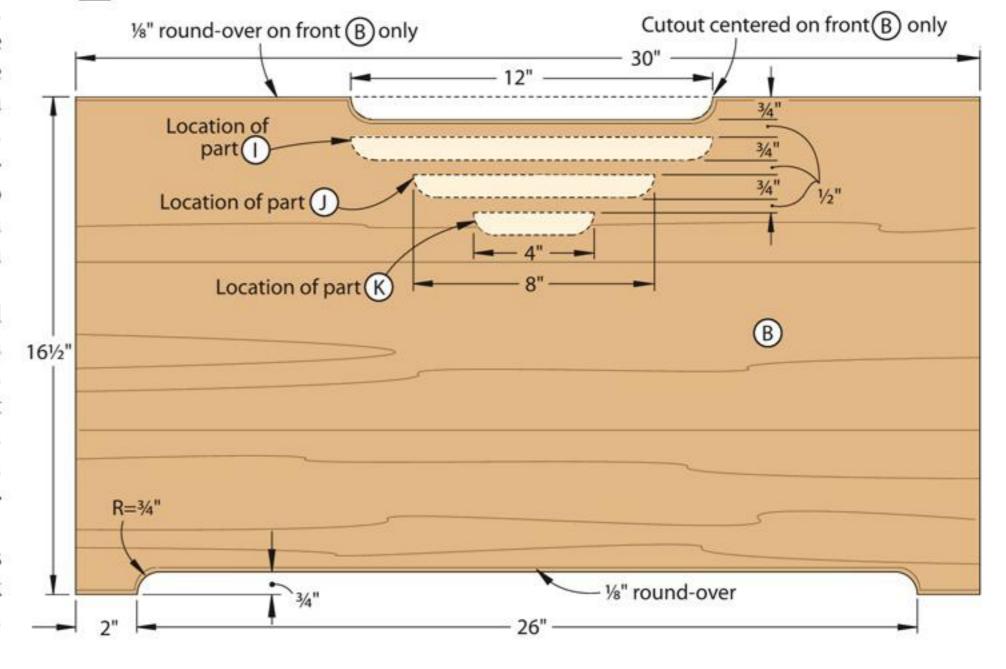

SHOP TIP

Drill perpendicular holes without a drill press

Instead of wrestling with large panels on a small drill-press table, I use this simple bit alignment jig, made from ¾" MDF scrap, when drilling the rounded handle corners in the sides (A). To make the jig, cut two 1½"-wide pieces with squared ends: one 2½" long and one 5" long. Glue them together with one end flush. To drill a perfectly perpendicular hole, align the jig with two adjacent layout lines, nestle the bit in the corner of the jig, and drill the hole.

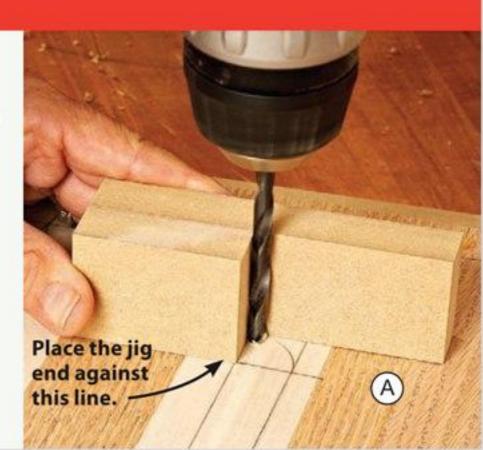




A ½"-wide spacer taped to the end (A) along the tapered edge provides a registration surface for mounting the front and back (B).




Gently spread the front and back (B) apart to slide the bottom (E) above the cleats (D) without smearing the glue beads.


2Cut the bottom (E) to size and test-fit it on the bottom cleats (D) between the front and back (B). (The angled front and back will prevent the bottom from resting flat on the cleat edges.) Apply a light bead of glue to the cleats, drop the bottom in position [Photo F], and weight the bottom until the glue dries. Then drill and drive four screws through each cleat and into the bottom [Drawing 3].

dab glue in the counterbores with a cotton swab. After the glue dries, trim the plugs near flush with a handsaw or chisel and sand them smooth. Cut the lid (C) to size from the panel you glued up earlier, allowing ½6" gaps between the lid ends and the box ends (A), and ¼" overhangs at the front

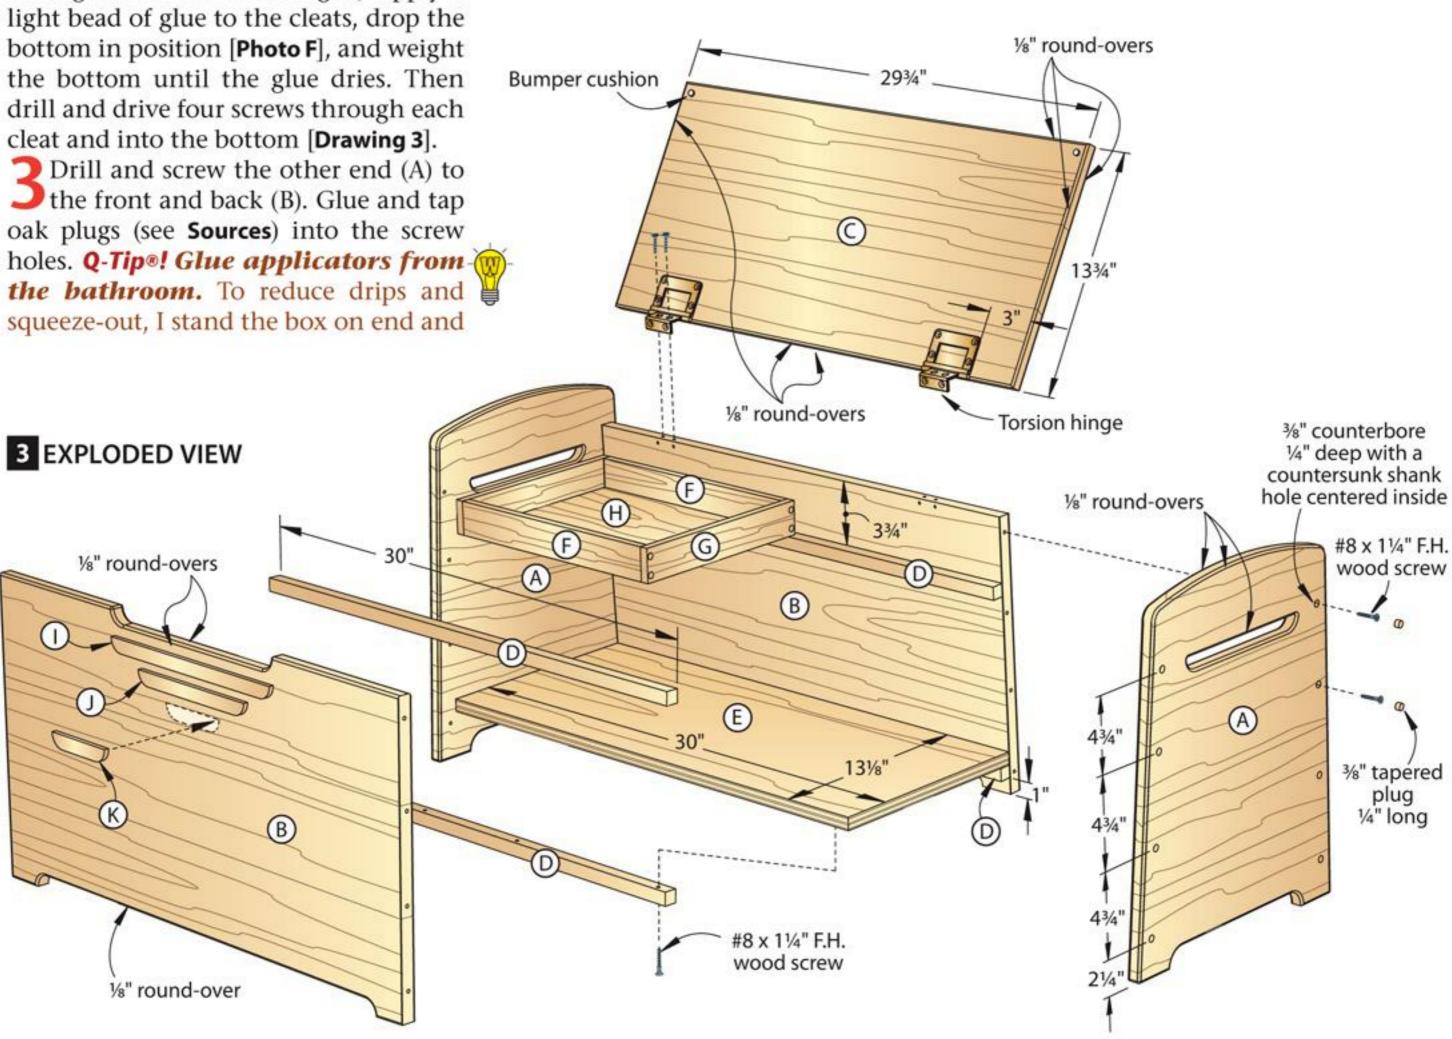

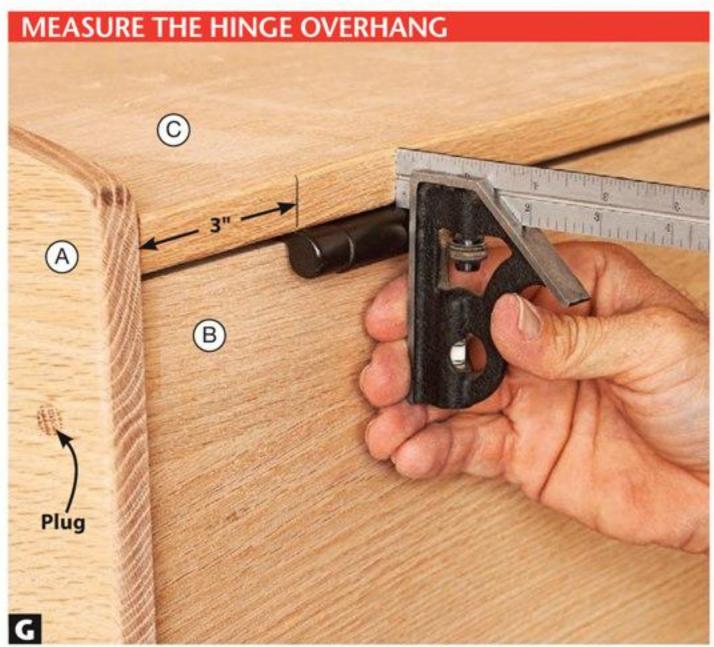

The hinge self-aligns on the back (B). With the lid (C) in position, measure how far the hinge barrel extends beyond the lid edge.

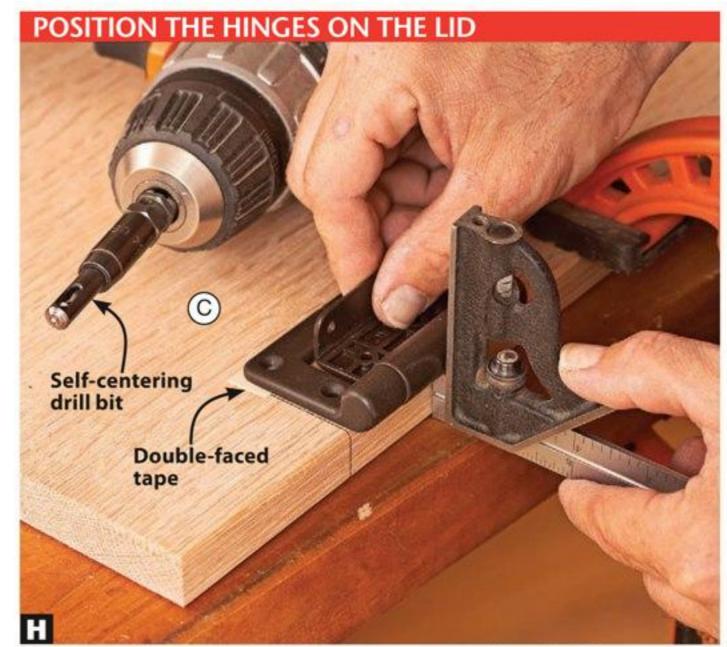

Using your hinge overhang measurement, position the hinge on the underside of the lid (C) and hold it there with double-faced tape.

and back (B). Ease the lid edges with a 1/8" round-over bit [**Drawing 3**] and sand the lid to 220 grit.

Mark the hinge locations along the rear edge of the lid (C). **Note:** We used torsion hinges [Sources, and Shop-Proven Products on page 80] that prevent the lid from falling and possibly causing injury. Center the lid on the box (A/B/D/E) and measure the hinge overhang [Photo G]. Remove the lid and position the hinges on its underside using the overhang you just measured [Photo H]. Double-facedtape them in place. Drill and screw the hinges to the lid. Quick Tip! The perfect bit for hinges. Since I discovered self-centering drill bits [Sources], my screw holes end up perfectly centered in the hinge-leaf holes so the hinge mounts exactly where I intended.

6 Center the lid (C) between the ends (A), and drill and screw the hinges to the top edge of the back (B).

Add a tray, trim, and finishing touches

Retrieve the other two cleats (D) and glue and clamp them to the front and back (B) [**Drawing 3**].

2Cut the tray front and back (F) and ends (G). Glue and screw the ends to the front and back [**Drawing 4**].


Insert a ¾" rabbeting bit in your router and attach a ¼×6×20" auxiliary subbase with a centered hole ¼" larger than your rabbeting bit diameter. (I mount this subbase with double-faced tape.) Set the bit to cut ¼" deep and rabbet the inside edges of the tray front and back (F), and ends (G) [Photo I].

Measure between the rabbets and cut the tray bottom (H) to fit. Using a file and sandpaper, round the tray-bottom corners to fit the curved corner rabbets. Then glue and clamp the bottom in place. Sand the tray to 220 grit and ease the edges.


SHOP TIP

Flatten panels as you assemble them

Even the most carefully edge-glued panel can warp slightly, but you can pull it back into shape during assembly. In the example shown below, the front (B) warps inward near the top. To straighten it, first screw the panel in place at the bottom while leaving a gap at the top between the panel and the spacer. Then pull the panel snug against the spacer and drive the second screw. Repeat for the remaining screws until the panel fits tightly against the spacer at the top.

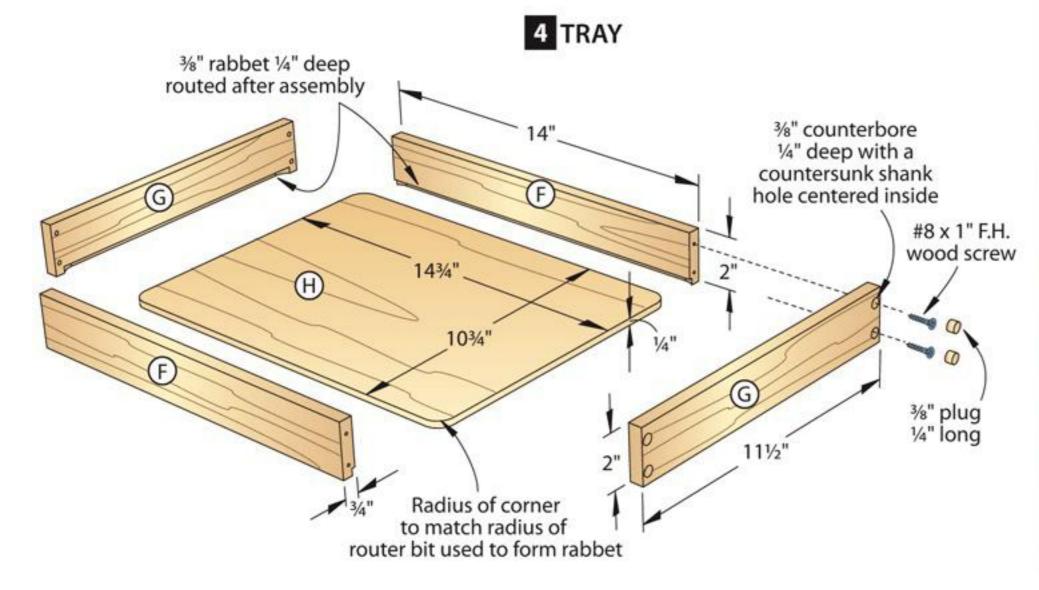



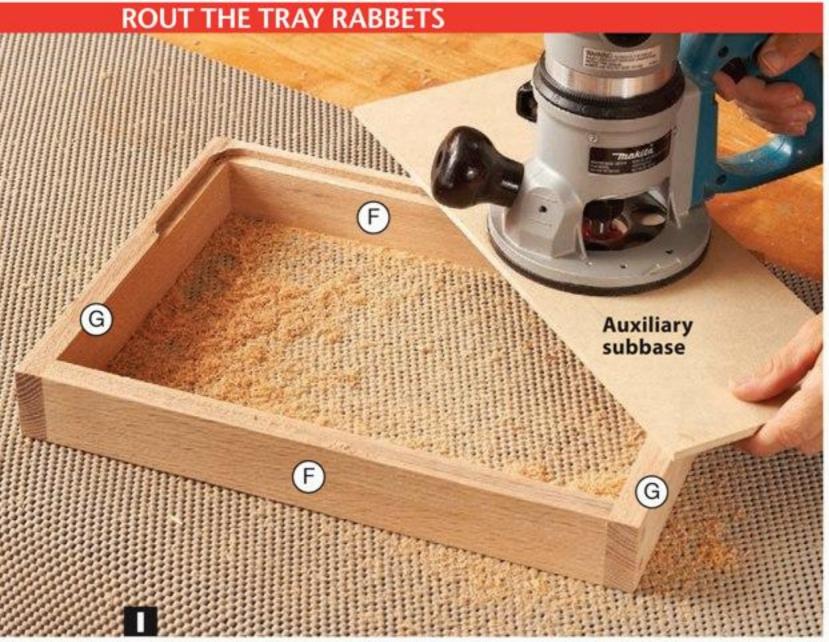

An auxiliary subbase cut from 1/4"-thick MDF straddles the tray front and back (F) and ends (G), preventing the router from tipping.



Preserve unstained areas for gluing on the front trim (I, J, K) by covering them with masking tape just smaller than the trim.

From ¾" stock, rip two strips ¼" wide and 13" long. Lay out the shapes of the top (I), center (J), and bottom (K) trim [**Drawing 2**]. Cut and sand them to shape and sand the faces to 220 grit.

Apply masking tape over the area where you'll mount the trim (I, J, K) on the front (B) [**Drawing 2**]. Lay out the shapes of the trim on the tape by tracing around the parts. Using a crafts knife, cut about ½" inside the part lines and remove the surrounding tape.

Remove the hinges and finish-sand the parts to 220 grit. Stain the toy box and apply a contrasting stain to the front and edges of the front trim (I, J, K).

(I used Varathane stains: no. 211756 Summer Oak for the box and no. 211804 American Walnut for the trim.) Remove the tape after the stain dries to reveal a sound glue surface [Photo J].

Glue and clamp the front trim (I, J, K) to the box front (B). After the glue dries, apply a top coat. (I wiped on three coats of a satin polyurethane.) Apply bumper cushions at the front corners of the lid [**Drawing 3**].

We want to feature YOUR project design next. Send photos and/or drawings to woodmail@woodmagazine.com or via USPS to WOOD® magazine, 1716 Locust St., LS-221, Des Moines, IA 50309.

Materials List

IA	iateriais	LI3	-			
Pa Bo		T	NISHEE W	SIZE L	Matl.	Qty.
A *	ends	3/4"	20"	16"	EO	2
B*	front/back	3/4"	16½"	30"	EO	2
C*	lid	3/4"	13¾"	29¾"	EO	1
D	cleats	3/4"	3/4"	30"	0	4
Ε	bottom	3/4"	13%"	30"	BP	1
Tra	ау					
F	tray front/back	3/4"	2"	14"	0	2
G	tray ends	3/4"	2"	11½"	0	2
Н	tray bottom	1/4"	10¾"	14¾"	BP	1
Tri	m					
I *	top trim	3/4"	1/4"	12"	0	1
J*	center trim	3/4"	1/4"	8"	0	1
K*	bottom trim	3/4"	1/4"	4"	0	1

^{*}Parts initially cut oversize. See the instructions.

Materials key: EO-edge-glued oak, O-oak, BP-birch plywood.

Supplies: Double-faced tape, masking tape, #8×1¼" flathead wood screws (24), #8×1" flathead wood screws (8). **Blade and bits:** ½" round-over, ¾" rabbeting router bits; 20-tpi jigsaw blade; ¾", ¼" drill bits.

Sources

Hinges: 30-inch/lb Lid-Stay torsion hinges in rustic bronze (2) no. 37327 [pack of 2], \$37.99, Rockler Woodworking, 800-279-4441, rockler.com.


Plugs: %" tapered oak plugs (8) no. 23515 [pack of 50], \$5.99, Rockler.

Self-centering drill bits: 3-pc. set of #4, #6, #8 bits no. 69053, \$27.99, Rockler.

Bumper cushions: ½×½" no. 37931 [pack of 25], \$3.89, Rockler.

Produced by Craig Ruegsegger with Jeff Mertz Project design: Jeff Mertz and Bill Nolan Illustrations: Roxanne LeMoine; Lorna Johnson

Cutting Diagram

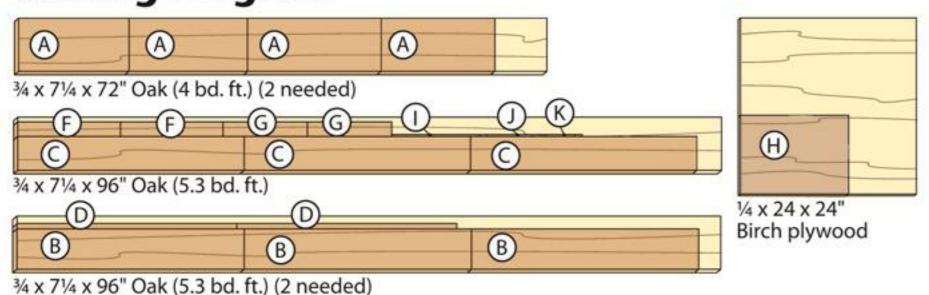

E

34 x 24 x 48" Birch plywood

MORE RESOURCES

FREE VIDEO

"Clamp and Sand Panels Flat" woodmagazine.com/panels

FREE ARTICLE

"How to Make and Use a Fairing Stick" woodmagazine.com/fairing

RELATED ARTICLE

"6 Steps to Perfect Plugs" issue 149 (June 2003) woodmagazine.com/woodplugs \$

(\$=Download this article for a small fee.)



eep your favorite mementos where you can see and enjoy them, free from dust and fingerprints. Glass sides give a view from all angles, and a clear acrylic top panel won't break. (Or you can choose tempered glass for the top.) Joinery couldn't be simpler: Four identical rabbeted frames are glued to the legs, and biscuits reinforce the mitered top frame.

Fashion four frames first

Trom ½" stock, cut the frame tops/ bottoms (A) and the frame sides (B) to size [Drawing 1]. Attach auxiliary fences to your tablesaw rip fence and to your miter gauge. Set up a ½" dado blade 1/4" above the table and rabbet each end of the tops and bottoms. Switch back to a rip or combination blade and cut a 1/4"deep groove for the glass panel in the tops, bottoms, and sides. Finish-sand the pieces to 220 grit.

This handsome home for

treasured items features a

lift-off top for easy access.


Apply glue only to the rabbets in **—**the frame *bottoms* (A). Clamp the sides (B) and top (A) in place [Photo A], making sure the grooves in all pieces align. **Note:** Do not glue the top. After the glue dries, drill and countersink 3/32" pilot holes [Drawing 1] through the top and into the sides.

To make the beads (C), rout 1/4" round-overs on all four edges of two ½×2×31" blanks. Rip a %"-wide strip from each edge, then crosscut the beads to match the length of the frames (A/B). Sand the beads to 220 grit, then glue them to the bottom of the frames (A/B) [Drawing 1a, Photo B].


Cut the aprons (D) to size [Drawing 1]. Using a fairing stick [More Resources], lay out the curve on the bottom edge of each one; then bandsaw and sand them smooth. Quick Tip! W Sand identical curves. Stack the aprons together with double-faced tape and sand all four at once using a sanding drum. Sand the faces of the aprons to 220 grit. Lay each frame (A/B/C) flat on your bench and glue an apron to each one [Photo C], making sure the ends are flush. After the glue dries, screw the tops (A) to the sides (B).

Make the legs and assemble the base

1 Cut the legs (E) to size [Drawing 2]. Make a copy of the Leg Pattern [Drawing 3] and spray-adhere it to a $\frac{1}{4} \times 1\frac{3}{8} \times 5$ " piece of hardboard or plywood. Bandsaw and sand the template to shape, then use it to lay out the curve on the two inside faces of each leg. Bandsaw and sand the curves to shape, then sand the legs to 220 grit.

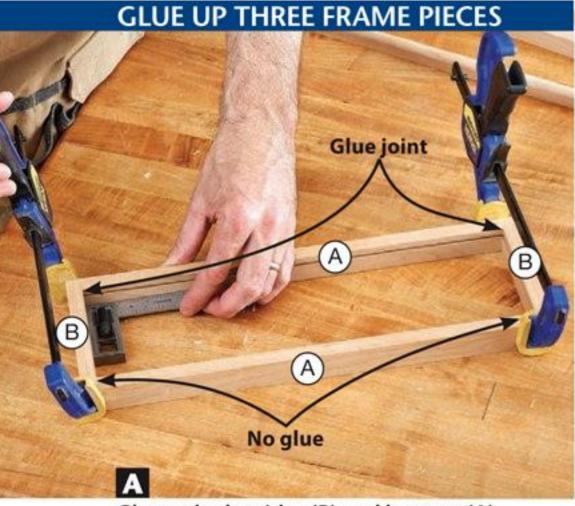


Glue only the sides (B) and bottom (A) together. The top (A) is screwed in place later. Use it as a spacer during the glue-up.

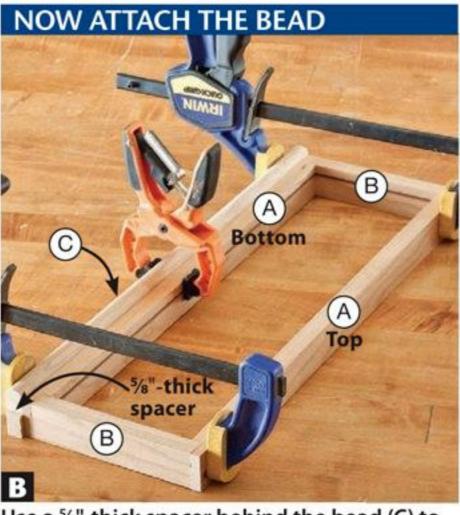

Use a %"-thick spacer behind the bead (C) to position it while gluing it to the frame (A/B). Remove the spacer after a few minutes.



A ¼" spacer below the apron (D) positions it. The apron, bead (C), and bottom (A) create a groove that the bottom (F) fits into later.

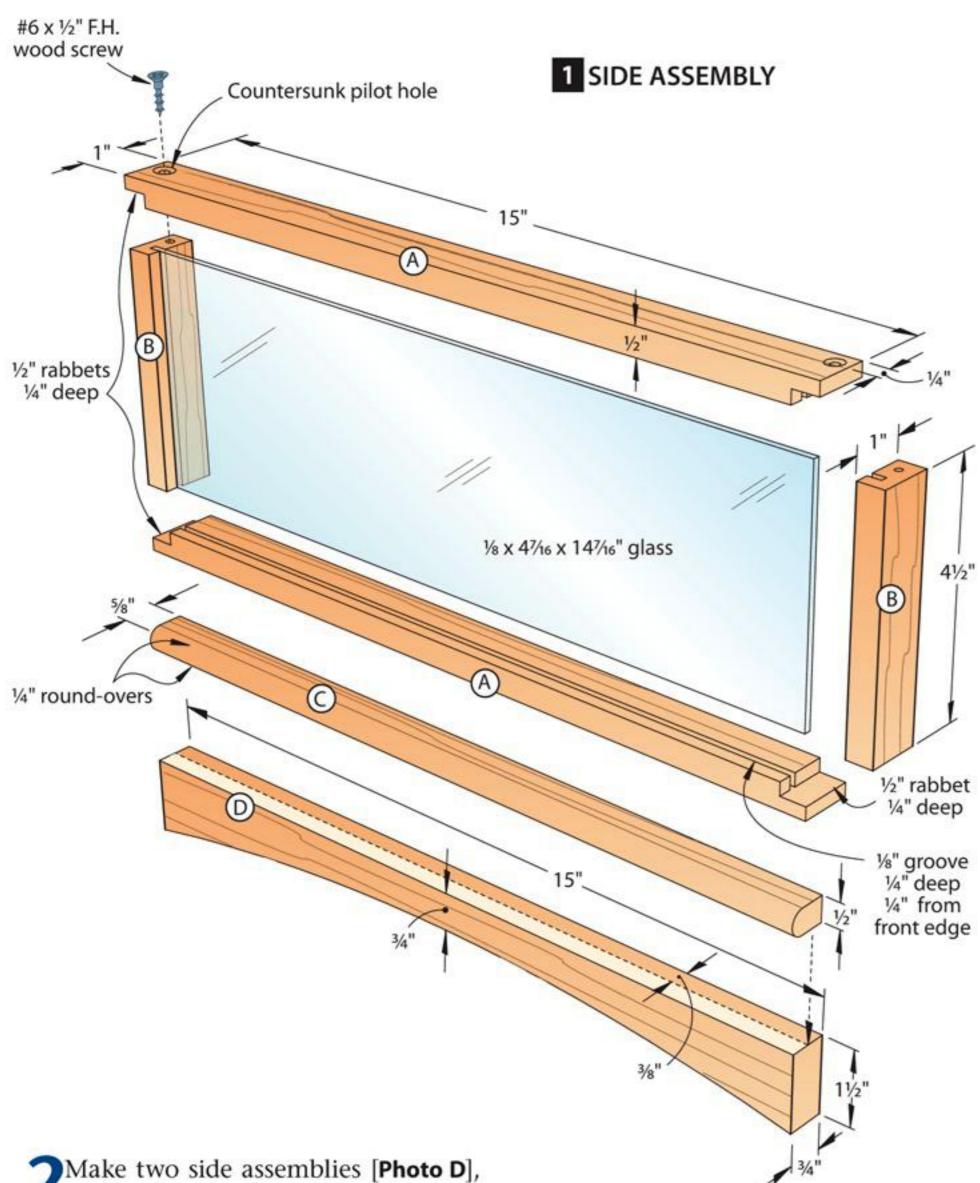


and let the glue dry thoroughly.

Glue the two remaining frames


(A–D) to one of the side assemblies

(A–E), again with the tops and inside edges flush. While the glue dries, cut the

bottom (F) to size and notch the corners to fit around the legs [**Drawing 2, Photo E**]. Test the fit, then glue the bottom in the grooves.

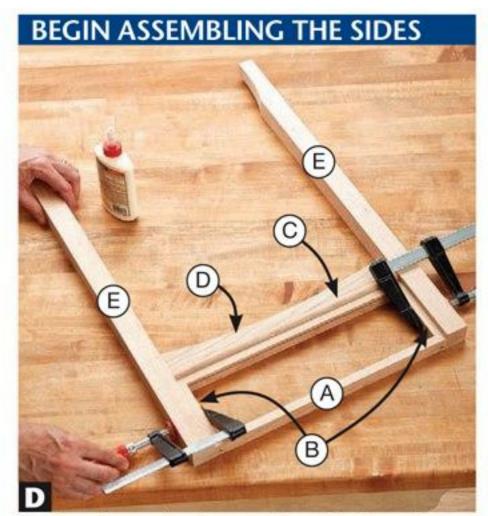


Apply glue to the frame sides (B), then clamp a frame (A–D) between two legs (E) with their tops and inside faces flush.

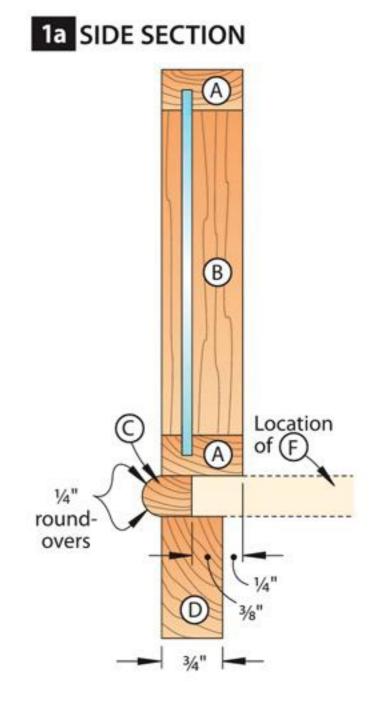

SLIDE THE BOTTOM IN Corners notched to fit around legs


With three frames (A–D) glued to two legs (E), check the fit of the bottom (F) in the grooves behind the beads (C).

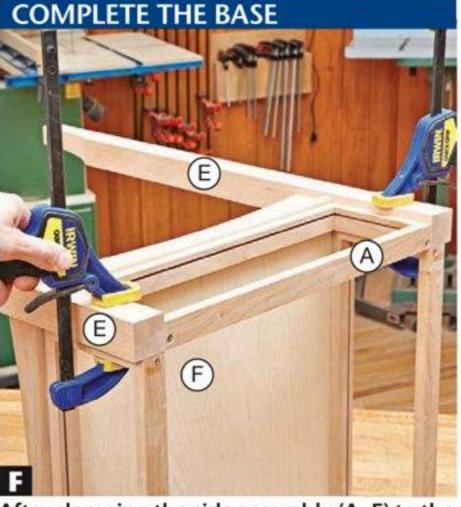

After clamping the side assembly (A–E) to the sides (B), stand the base up on a flat surface to ensure all four legs rest flat.



Protect the frame (G) with a scrap, then tap each corner directly above the leg so the brads leave a dimple on the underside.

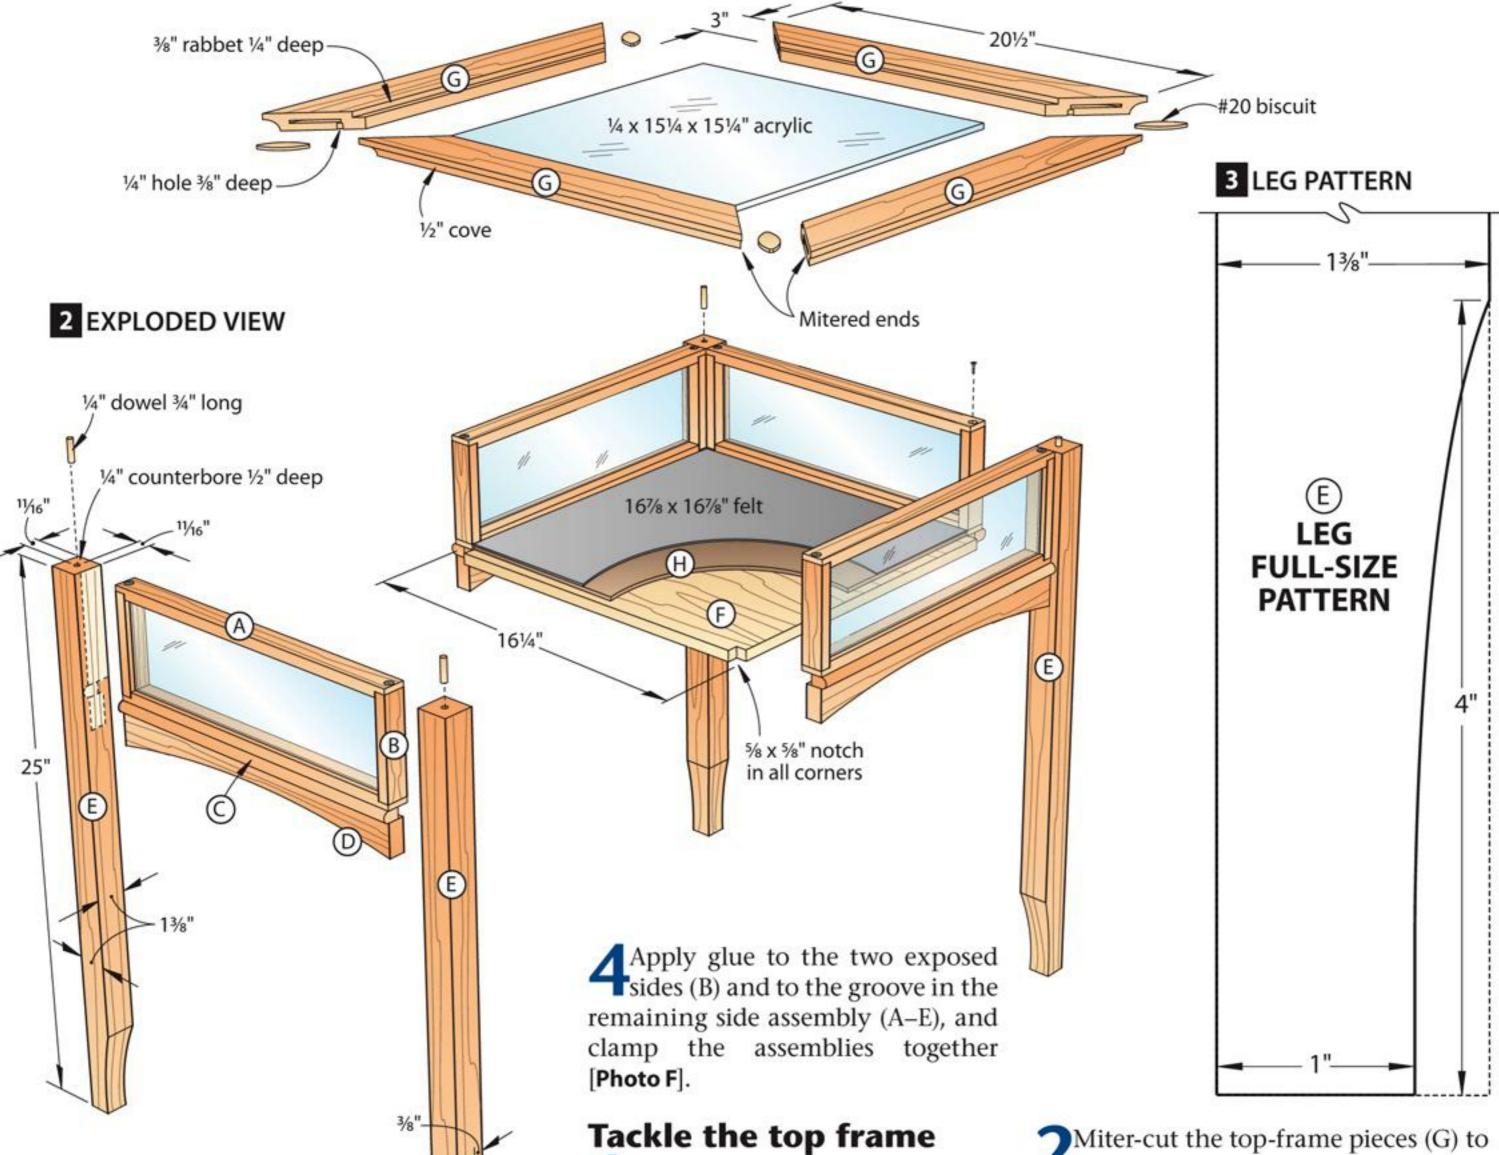

1 Cut four top-frame pieces (G) 1"

longer than listed [Drawing 2].


Rout the 1/2" cove on the front bot-

tom edge and a 3/8" rabbet to match

the thickness of your acrylic along

the top inside edge of each piece.

Miter-cut the top-frame pieces (G) to length, then cut slots for #20 biscuits in each end [Drawing 2]. Glue up the top frame, using a band clamp to draw the joints closed. Make sure the frame is flat and square before setting it aside to dry. After the glue dries, sand the frame to

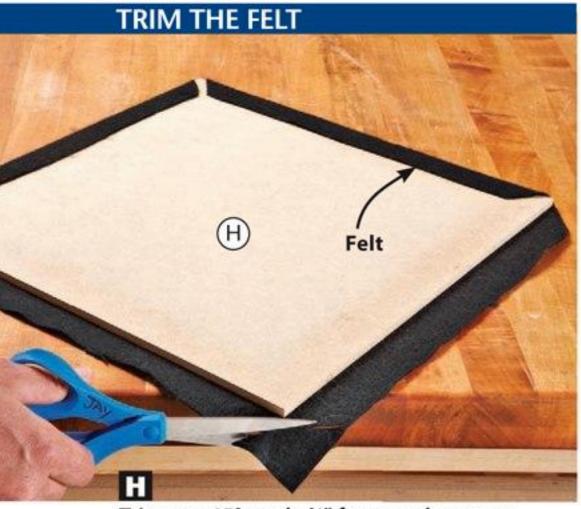


Trim at a 45° angle ¼" from each corner.

Apply spray adhesive to the back of the liner core (H), and fold the felt over, pulling it taut.

SHOP TIP

Finger saver


Do large fingers prevent you from gripping and striking small brads? Hold those short fasteners with a pair of needle-nose pliers instead. Rest the pliers on top of the leg (E) to steady them as you drive the brads. Then use the pliers' wire cutters to snip the heads off the brads.

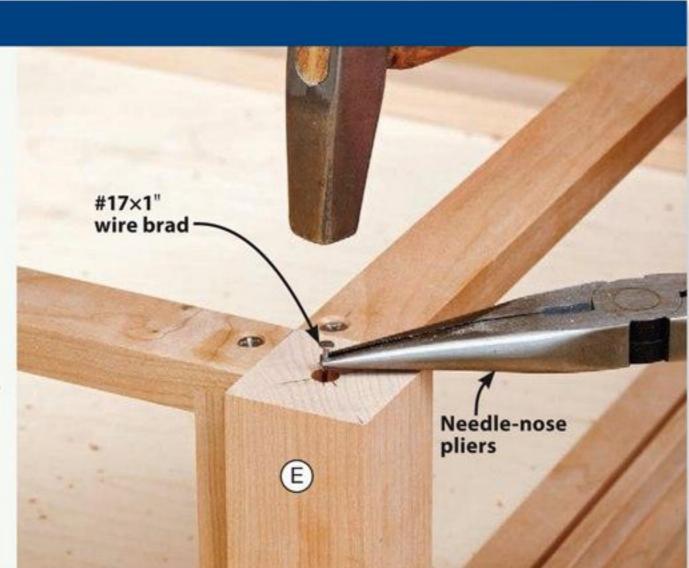

Cutting Diagram

(F)

1/2 x 24 x 24" Birch plywood

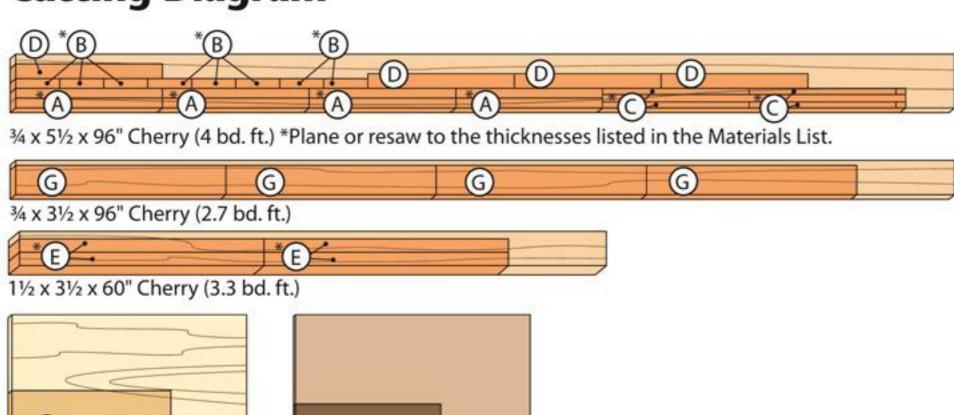

1/4 x 24 x 24" Hardboard

220 grit. Cut or have cut a piece of ¼"thick clear acrylic or tempered glass to
fit in the frame. **Quick Tip! Cut acrylic on your tablesaw.** An 80-tooth blade
with an alternating top bevel grind cuts
acrylic cleanly. A zero-clearance throat
insert around the blade prevents chipping and cracking.

3 Mark diagonal lines on top of each leg to locate its center. Drill a ¼" hole ½" deep at each intersection [**Drawing 2**]. To transfer the locations of these holes to the top frame (G), drive a small brad into the hole [**Shop Tip**, above] and snip off the head so the brad extends above the leg. Center the top frame on the base. Mark one frame piece and the corresponding side frame (A–D) so you can reposition the top frame, then mark the hole locations [**Photo G**]. Drill ¼" holes ¾" deep at these marks. Remove the

brads from the holes and glue ¾"-long pieces of ¼" dowel into each leg.

Apply a finish. (We used Minwax cherry no. 235, then wiped on three coats of satin polyurethane, sanding lightly between coats with a 320-grit sanding sponge.)

5 Remove the top (A) from each frame and cut or have cut glass to fit in the frames. Insert the glass in the grooves, and reinstall the tops.

For the liner core (H), cut a piece of ¼" hardboard ½" smaller than the opening in the top of the table base. Cut a piece of felt 2" larger in each dimension than the liner core. With the felt facedown on your bench, apply spray adhesive to one face of the liner core and place it on the felt, centered. Smooth out any wrinkles, then flip the core upside down and trim the corners [Photo H].

Materials List

rt	FI		Matl	Qty.	
frame tops/ bottoms	1/2"	1"	15"	C	8
frame sides	1/2"	1"	41/2"	С	8
beads	1/2"	5/8"	15"	С	4
aprons	3/4"	1½"	15"	С	4
legs	1%"	1%"	25"	С	4
bottom	1/2"	16¼"	16¼"	BP	1
top-frame pieces	3/4"	3"	20½"	С	4
liner core	1/4"	14%"	14%"	Н	1
֡֡֜֜֜֜֜֜֜֜֜֜֜֜֜֜֜֜֜֜֜֜֜֜֜֜֜֜֜֜֜֜֜֜֜֜֜	bottoms frame sides beads aprons legs bottom top-frame pieces	frame tops/bottoms frame sides frame sides ½" beads aprons legs 1¾" bottom ½" top-frame pieces ¾"	frame tops/bottoms frame sides ½" 1" beads ½" 5%" aprons ¾" 1½" legs 1¾" 1¾" bottom ½" 16¼" top-frame pieces ¾" 3"	frame tops/bottoms ½" 1" 15" frame sides ½" 1" 4½" beads ½" 5%" 15" aprons ¾" 1½" 15" legs 1¾" 1¾" 25" bottom ½" 16¼" 16¼" top-frame pieces ¾" 3" 20½"	frame tops/bottoms ½" 1" 15" C frame sides ½" 1" 4½" C beads ½" 5%" 15" C aprons ¾" 1½" 15" C legs 1¾" 1¾" 25" C bottom ½" 16¼" 16¼" BP top-frame pieces ¾" 3" 20½" C

^{*}Parts initially cut oversize. See the instructions.

Materials key: C-cherry, BP-birch plywood, H-hardboard.

Supplies: Spray adhesive, double-faced tape, #6×½" flathead wood screws (8), ¼" dowel, #20 biscuits (4), #17x1" brads (4), $\frac{1}{16} \times \frac{14}{16}$ glass (4), $\frac{1}{16} \times \frac{15}{16} \times \frac{15}{16}$ acrylic or tempered glass, $\frac{19}{16} \times \frac{19}{16}$ felt.

Blade and bits: Stack dado blade; ¼" round-over, ½" cove router bits; ¾2", ¼" drill bits.

Place the liner in the table; then place the acrylic top in the frame (G) and position the frame on the dowels. Dust off your treasured collectibles and place them in their new protective home.

Produced by **Craig Ruegsegger** with **Kevin Boyle** Project design: **Kevin Boyle**

Illustrations: Roxanne LeMoine; Lorna Johnson

MORE RESOURCES


FREE PLAN

Find a free plan for making a fairing stick at woodmagazine.com/fairing.

FREE VIDEO

Watch a free video showing how to use a fairing stick at woodmagazine.com/fairingvideo.

2 Back-issue collections that belong in every shop!

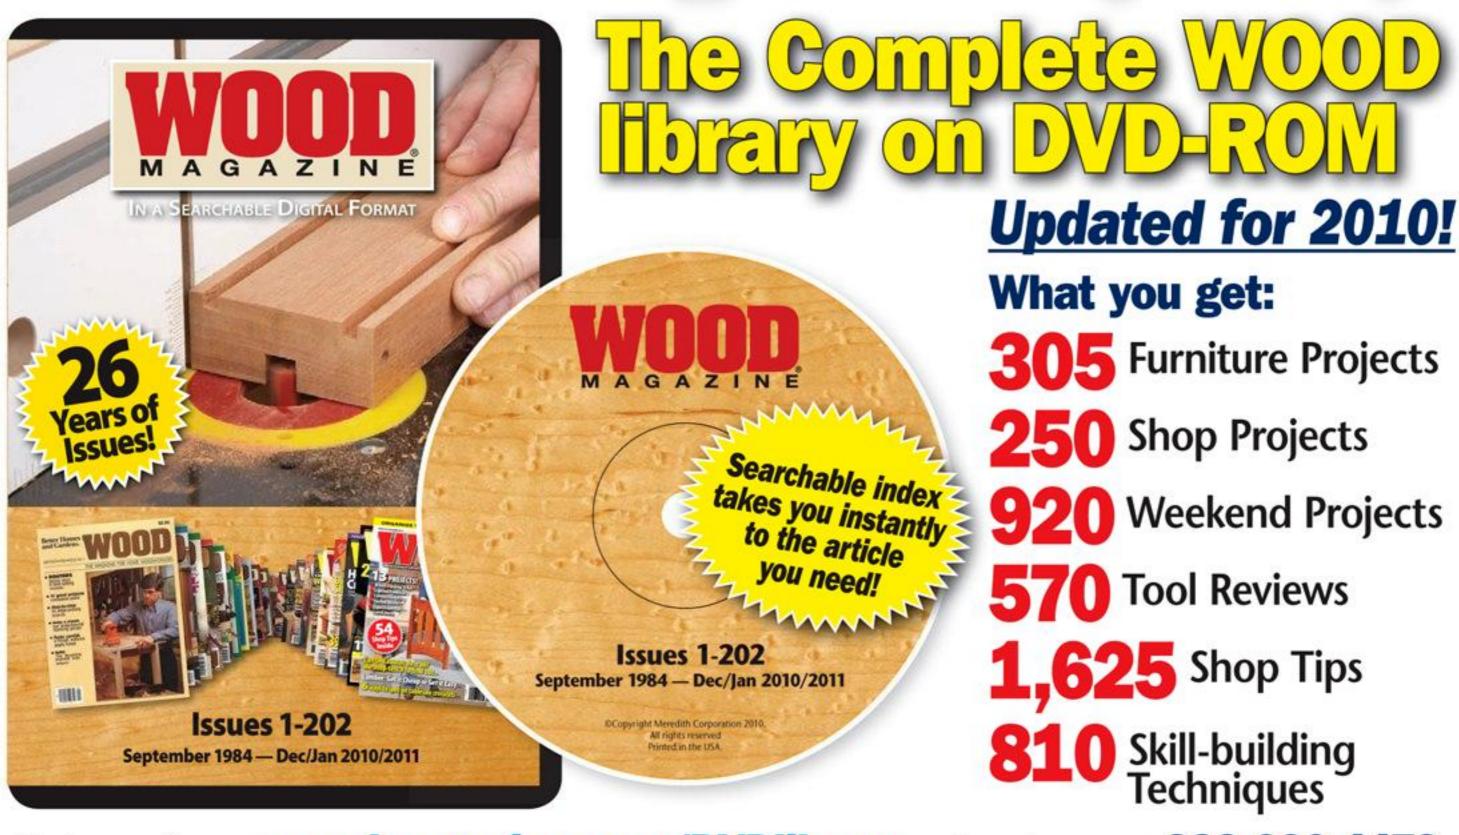

Order online at woodmagazine.com/DVDlibrary or by phone at 888-636-4478



Fully-indexed, searchable and printable.

Weekend Woodworking Projects (former sister magazine of WOOD) focused on beautiful projects that could be built with a minimal investment in time, tools, and materials. All projects were built and proven in the WOOD workshop, so you know you can rely on the plans. Back issues of Weekend Woodworking Projects are nearly impossible to find anywhere, but this disc makes all of these projects available to you once again—at a price of only 15 cents per plan!

See more of the projects on this disc and order your own copy at woodmagazine.com/WeekendCD Or order by phone: 888-636-4478

2010 WOOD INDEX Issues 195 thru 201












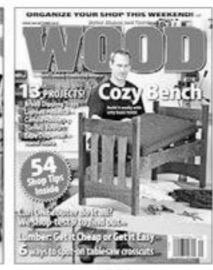

Article, Issue: Page

Shelf-pin jig, 195:18

Snack tote, 195:52

Spline-slot jig, 197:43

Tape dispenser, 200:24

Shelf and mirror, 196:32-35

Shelves, tapered, 199:68-72

Table, assembly, 196:68-73

Storage stands add-ons, 197:22, 24; 200:8



195 196 197 198 199 200

PROJECTS

Article, Issue: Page

Barnyard puzzle, scrollsawn, 195:64-67 Barrister's bookcase, 195:28-36 Battery dispenser, drop-down, 201:32 Bench, Arts and Crafts, 200:28-32 Bench, knockdown sawhorse, 198:24, 26 Bench, outdoor, 197:38-41 Bit case, drill and router storage, 198:66-70 Blanket chest (update), 200:8 Bookcase, slanted shelves, 201:34-38 Bookcases and cabinets, built-in, 199:30-36 Bowl, lidded, turned, 197:62-65 Bowl set, turned, 200:34-37 Bread-dipping tray, 200:66-69 Bud vase, reader variation, 201:6 Bulldozer, toy, 199:56-61 Cabinet, pine, country, 196:38-44 Candleholders, 200:54-55 Chip and dip tray, 195:50-52 Chisel rack, 196:18 Clock, dancing, 198:72-74 Clock, Greene & Greene style, 201:40-44 Cookie sheet organizer, 198:64

Article, Issue: Page

Drawer organizer, 198:62 Drawer-pull jig, 197:16, 18 Hall table, 199:40-44 Hall tree storage bench, 198:52-57 Jewelry box, 195:58-62 Kitchen drawer and cabinet organizers, 198:62-65 Media cabinet, 197:70-75 Miter sled, 198:49-51 Miter-gauge stopblock for long parts, 200:20 Mitersaw fence stop, 201:26-27 Mortising guides, deep and shallow, 201:18 Mortising/doweling jig, 195:55; 198:6 Ornament, Christmas, turned, 201:66-68 Pedestal, luminous display, 200:62-65 Pergola, 198:34-41 Pull-out tray for kitchen cabinets, 198:63 Pushsticks, for tablesaw, 201:47 Radial-arm saw fence, 201:26-27 Router dado jig, 200:50

Tool chest, 201:50-57 Toy bulldozer, 199:56-61 TV/game cabinet, 195:38-43 Wall shelf and mirror, 196:32-35 Wall shelves, floating, 197:34-37 Window seat, built-in, 199:30-36

> **Greene & Greene** Style Clock 201:40-44

TOOLS & MATERIALS

Routing guide for dadoes, rabbets, half-laps, 199:80-81

Article, Issue: Page

Cutting board, end-grain, 201:70-72

Dartboard cabinet, 195:43

Bandsaw, adj. height, Gen. International, test, 201:80 Beaded Face-Frame System, Kreg Tool Co., 195:69 Bench cookies, Rockler, 195:68 Blades, thin-kerf or full-kerf?, 197:78 Block plane, standard vs. low-angle, 200:82 Chisels, all about, 196:50-54 Clamps, Quick-Grip Pivoting, Irwin, test, 198:88 Drill bits, Colt, Horst Meibach Co., test, 201:78 Drill-press tables, test, 196:16 Drill presses, floor model, test, 199:50-55 Ebony plugs, faux, FastCap, 195:69 Feather boards, Paralign, JessEm, test, 199:86 Guide Bars, ZeroPlay, Micro Jig, test, 200:84

Article, Issue: Page

Router mortising jig, 201:62

Selling WOOD projects, 201:6

Sanding center, dust-catching, 199:62-66

Sawhorse knockdown bench, 198:24, 26

Hand planes, Stanley Sweetheart, 195:70 Impact driver, Makita, 195:70 Impact drivers, all about, 201:58-59 Japanese hand planes, 199:82 Lathe jaw pins, Penn State Industries, test, 195:82 MagFence combo kit, Magswitch, test, 196:82 Micro-drivers, cordless, test, 198:76-78 Mini-lathe, Delta, test, 197:76 Miter gauge, Incra V120, test, 198:86 Mitersaw, MiterMate, Craftsman, 195:68 Mitersaw, sliding dual-bevel, Makita, test, 196:84 Mitersaw stands, portable, test, 198:30 Mortise-and-tenon jig, Leigh Super FMT, 195:70

Article, Issue: Page

Mortise Mill, Zip Slot, JessEm Tool Co., test, 195:78 Mortising attachment for drill press, 199:53 Planer, 13" benchtop, Delta, test, 199:86 Planers, benchtop, test, 196:56-61 Plunge-router tips, 195:54-57 Router bits:

Adjustable Rail and Stile, Freud, 195:69 Spiral vs. straight bits, 198:22-23 Straight or spiral, pros and cons of each, 200:52 Router bits, cleaning bearing-guided, 197:82 Router kit, two-base, Bosch, 195:69 Router table, benchtop, Skil, test, 200:84

continued on page 46

TOOLS & MATERIALS (CONT.)

Article, Issue: Page

Router-table box-joint jig, Rockler, test, 196:82 Router Wizard Pro, Eagle Jigs, test, 196:83 Routers that can do it all, test, 200:56-61 Shelf-pin drilling jigs, test, 199:88 Shop apron, Duluth Trading Co., test, 197:76 Spindle sanders, benchtop, test, 195:24 Stacked dado set pros and cons, 200:52

Article, Issue: Page

Tablesaw, contractor-style, Grizzly, test, 198:86 Tablesaw, fix drooping wings, 195:74 Tablesaw, removing dust and gunk, 200:26 Tablesaw, SawStop Professional, 195:70 Tablesaws, 3-hp cabinet, test, 197:49-55; 198:6 Tablesaw assembly and tune-up tips, 197:56-60 Tablesaw crosscuts, how to make, 200:38-39

Article, Issue: Page

Tablesaw injury lawsuit, 199:6, 28-29 Top new tools for 2010, 195:68-70 Trim router, plunge, Trend Routing, test, 201:78 Vacuum, Smart Cart, Ridgid, test, 195:78 Workbenches, portable, test, 200:74-75

TECHNIQUES AND FEATURES

Article, Issue: Page

Abram, Norm, 196:6 Biscuit joints, frame and box, 197:44 Cupping, preventing in wide boards, 195:74 Boy Scouts, Woodwork Merit Badge Series, 195:72 Building from plans, tips, 196:76 Card scraper, how to sharpen, 198:28 Celtic knot, how to make, 199:76, 78 Chisels, all about, 196:50-54 Cove molding, make on tablesaw, 198:18, 20-21 Dado duel, bits vs. blades, 200:49-52 Dadoes, fixing loose, 198:16 Dovetails, hand-cut half-blind, 196:53 Drawer slide mounting, how to, 198:65 Dust-collection system, planning, 198:58-61

Emerald Ash Borer, 199:24, 26

End-grain scarf joint, 197:69

Fasteners for treated lumber, 198:32 Finishing: Patching scratches, 197:26, 28-29 Pens with cyanoacrylate glue, 199:39 Polishing with random-orbit sander, 199:16, 18, 20 Stain, avoiding and repairing blotches, 196:26, 28

Face frames, with pocket-hole joints, 198:42-43

Stain, matching, 196:78 Fire-prevention tips, 201:16 Heim, Fred, scale model-maker, 197:66-69 Index 2009, issues 188 thru 194, 195:45-48 Inlay, butterfly key, using a router, 201:28-29

Article, Issue: Page

Joinery:

Mortise and tenons, 4 ways to make, 201:60-65 Sprung joint, 198:84

Squaring secrets, 201:22, 24-25

Through-mortise-and-tenon, how to, 200:14, 16, 18

Waterfall joint for table leg, 196:77

Jointing parallel parts, 197:69

Kitchen makeover, 196:62-67

Knots, working with, 196:36-37

Laminating curved parts, 197:69

Layout lines, razor-fine, 197:30, 32

Marking knife, how to use, 197:30, 32

Mitered joints, how to reinforce, 197:42-44

Miters, cutting safe, simple, 197:36

Miters, cutting with sled, 198:49-51

Model trucks, half-scale, 197:66-69

Mortise-and-tenon joints, 4 ways to make, 201:60-65

Mortise for hinges, with chisel, 196:53

Mortised lock, installing, 195:20, 22

Patterns, adhering, 195:76

Photos, scaling plans from, 197:68

Plans, how to enlarge, 199:82

Plunge-router tips and techniques, 195:54-57

Plywood tear-out, how to fix, 196:30

Pocket-hole joints, for face frames, 198:42-43

Router-bit tear-out, prevent, 201:30-31

Routing safety, 199:22-23

Scaling projects from photos, 197:68

Sharpening chisels, 196:54

Article, Issue: Page

Shelf material selection guide, 199:31 Shop Monkey:

Boards' unique character, 201:20

How precise should you be?, 195:16

Practice makes proficient, 200:22

Woodworking plans rip-offs, 197:20

Shop organization, how to, 200:40-44

Slot-cutting bit, 196:76

Splined miters, outside/inside, 197:43

Sprung joint, 198:84

Tablesaw jig, for notched joints, 196:69

Tear-out, avoid when routing, 201:30-31

Tear-out, repairs in plywood, 196:30

Torsion box, how to build, 196:68

Turning, stabilize spindles, 195:72

Turning pens for college fund, 199:38-39

TV wiring, mounting and connecting, 195:42

Upholstery, bench seat, how to, 200:32

Window seat and cabinets installation, 199:30-36

Wood toy regulations, update, 199:84

Woods:

Ash, threatened, 199:24, 26

Hardness of wood, 196:80

Outdoor woods, 196:20, 22

Pallets, danger of using, 199:6

Rainbow Eucalyptus, 198:80

Thermally modified wood, 196:20, 22

Wood, guide to getting, 200:71-73

Treated lumber and alternatives, 198:32-33

Turning Pens for College Fund, 199:38-39


All About Wood Chisels, 196:50-54





Cutting Miters with a Sled, 198:49-51



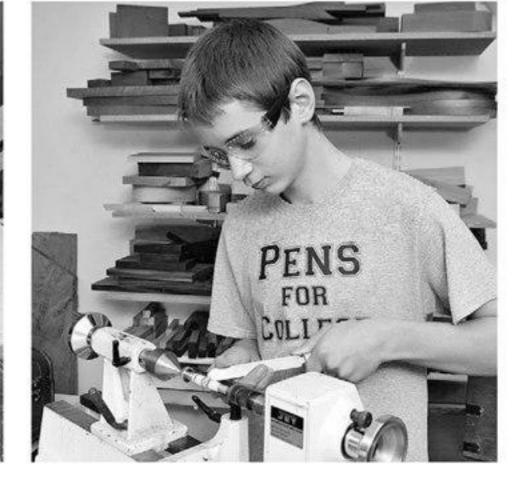

SHOP TIPS/SKILL BUILDERS

Article, Issue: Page

Angling screws prevents rail blowout, 195:32 Bandsaw, fence guide, 196:11 Bandsaw dust collection from PVC, 198:8 Bandsaw outfeed support, 196:12 Bar clamps as temporary supports, 201:9 Bed-bolt alignment, 200:12 Bench vise from handscrew clamps, 195:8 Biscuits, centering, 200:29 Blade- and bit-height gauge, 199:10 Cabinet doors, hanging, 196:41 Center finder for odd-shape pieces, 195:14 Centering rule, 199:13 Chair joints, repairing loose, 197:78 Chamfers, stopped, routing, 195:31 Circular-saw fence, 201:15 Clamp marks, preventing, 198:10 Clamping corners, 201:13 Clamping face frames, 195:15 Cord storage in case, 200:13 Corner clamping blocks, 195:12 Curved parts, trace the arc, 200:30 Curves, scribing with template, 200:78 Cutting threaded rod, 199:60 Dimensional lumber, working with, 198:35 Doors, equal reveal using butt hinges, 195:15 Double-faced tape, uses, 200:76 Dowel positioning, 201:37 Dowel storage with lift block, 198:11 Dowels, make your own, 198:12 Drawer false fronts, how to install, 201:53 Drill-bit storage, 198:70 Drilling large holes with drill press, 201:12 Drilling small parts, 201:37 Drill-press depth setting, 199:12 Drill-press storage at base, 201:8

Article, Issue: Page


Drying rack, instant, 196:15 Easel, for plans, using ladder, 195:13 Featherboard, magnetic fence-mount, 201:10 Finishing large projects, rotisserie for, 197:12 Fixed-shelf edge, hiding, 199:34 Food-safe surface, cutting board, 201:72 Glue smears, avoiding, 198:54 Grain, ribbon in inlay, 201:28 Hardwood storage, 201:82 Identical parts, making, 199:57 Joining curved pieces, 196:10 Knots, working around 196:34 Labeling parts during assembly, 197:73 Laser-bore sighter for centering holes, 197:10 Magnetic drill-press chuck key, 198:13 Marking gauge for turning, 201:68 Mini-trammel for routing small circles, 197:12 Miter gauge, setting for tricky angles, 201:10 Mitersaw hold-down for small pieces, 196:14 Mortise setup on router table, 195:10 Panel saw, 200:10 Pencil-point sharpening with sandpaper, 197:35 Perforated hardboard hangers, magnetic, 196:10 Planer thickness gauge, 199:15 Planing thin parts, 195:62 Plugs, drilling without drill press, 199:42 Plugs, kinds of, 199:43 Portable tool holder, 197:13 Pressure-treated lumber, fasteners for, 197:41 Pressure-treated lumber, warping, 197:40 Pushblock, tablesaw fence-mounted, 196:8 Pushstick, double, 198:10 Rabbet, cutting a, 198:53 Rails and stiles, flush faces on, 195:30 Resawing thin stock, 200:67

Article, Issue: Page

Router, horizontally mounted on tablesaw, 197:8 Router climb-cut, 200:69 Router-raising crank, 200:11 Router-table fence micro-adjuster, 199:14; 200:13 Routing grooves, 200:64 Sanding-block wedge, 198:73 Sawhorse and power strip, 196:12 Sawhorse from plastic storage tubs, 198:15 Scrollsawing tight turns, 198:13 Seat-sculpting jig, 199:8 Setup blocks, angled, 199:69 Sharpen plane irons, jig, 201:9 Shop vacuum, tool-triggered, 199:65 Signing projects, how to, 201:84 Spindles, storyboard for, 195:8 Spray booth, mini, 195:11 Square project, checking for, 201:24 Squaring large workpieces, 196:15, 79 Stopped chamfers, routing perfect, 195:31 Stopped grooves on router table, 195:10 Storage cabinets, shop, 200:42 Tablesaw safety reminder, 198:14 Tabletop, building and stability, 200:80 Tear-out, reduce when routing, 200:69 Turning, checking flatness and depth, 200:35 Turning, hollowing and sanding large bowl, 200:37 Turning gauge, open-end wrenches, 197:64 Turning-log blanks, finding center of, 197:9 Veneer, how to flatten, 200:62 Wiring a television, 195:42 Wood species display board, 199:10 Workbench protection, vinyl shade, 199:13 Workbench tray, 197:13 Worksurface, portable, 199:15


Instant Drying Rack, 196:15

Drive screws in tight spots, 199:70

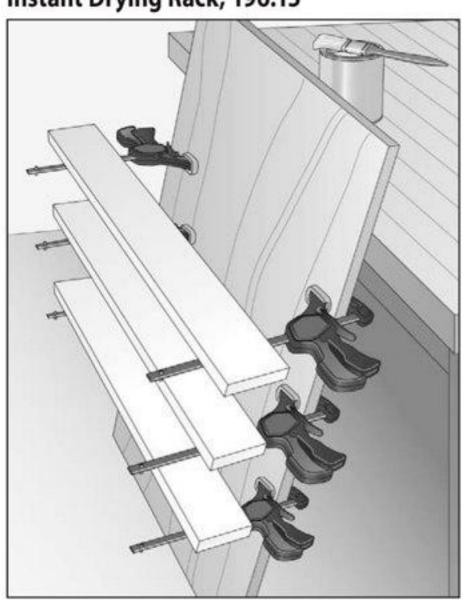


Clamping Face Frames, 195:15

Round-overs on narrow pieces, 201:8

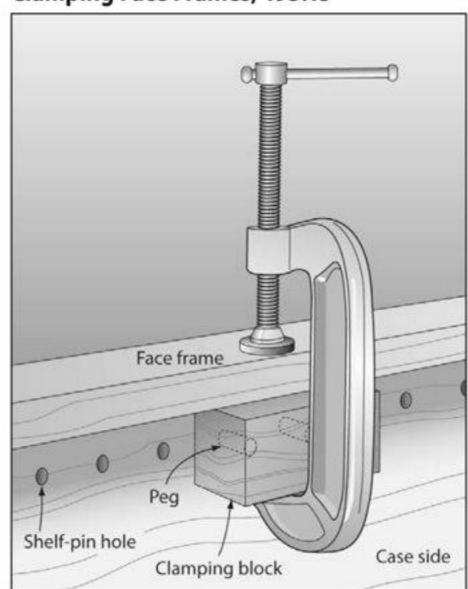

Zero-clearance insert recycle, 195:10

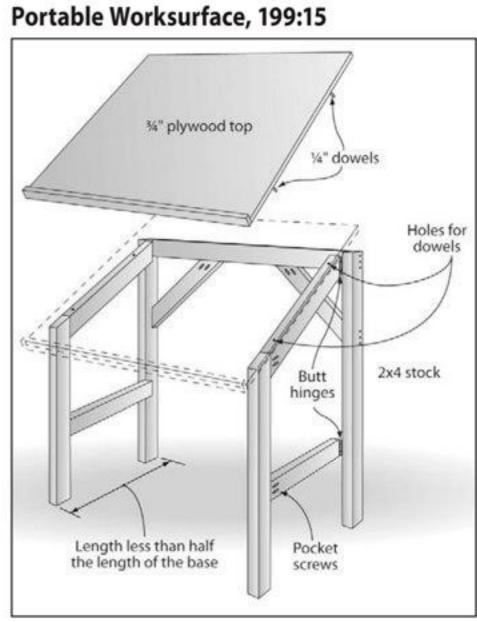

HOW TO USE THIS INDEX

his annual index includes every article and Shop Tip that appeared in WOOD® magazine from the December/January 2009/2010 issue through the November 2010 issue. To quickly find the article you're looking for, first identify the major index category most likely to contain the article:

- Projects (plans with step-by-step instructions)
- Tools & Materials (product reviews and guidance on using tools, accessories, hardware, and wood products)
- Techniques and Features (specific skills and articles of general interest, such as craftsman profiles)
- Shop Tips/Skill Builders (quick ideas you can put to use in your shop today)

Then look for the one word that best describes the project, technique, tool, or shop tip. Articles with two strong descriptors, such as a mission table, may be found under both descriptors—"mission" and "table."

Three steps to find any article, from issue 1 to present, using the online index

You also can quickly search the comprehensive online index of all *WOOD* magazine articles in one of two ways. First, to get directly to the index, type **woodmagazine.com/index** in your Web browser. Or, click on the **Article Index** button, shown *below*, in the left column of any **woodmagazine.com** page.

In the Keyword Search box, type
the one word that best describes the
article subject, avoiding plurals.
For example, to locate a tablesaw review,
type "tablesaw," (or simply "table") but
not "review." Click on the button marked
Search. If you want to narrow the search
to tablesaw jigs, type "tablesaw" in the
box, then click on the button next to
the words: Jigs, Fixtures, & Organizers
under Category Search. Next, scroll down

Category Search.

and click on Search under Keyword and

The Web page now displays a list of articles related to your search term, including the cover date of the issue, issue number, and the page numbers. If you don't have the issue, most articles published in WOOD magazine can be downloaded for a minimal cost. This list indicates downloadable articles with the blue words WOOD STORE, which, when clicked on, give you more details about buying the article. Otherwise, some back issues are available for \$7.95 (plus s&h) by calling 888-636-4478.



Article	Month	Year	Issue No.	Pag
Grime Stoppers	Oct	2010	200	26
Spot-on Tablesaw Crosscuts	Oct	2010	200	38
Tablesaws on Trial	Sep	2010	199	28
Make your own Cove Molding	Jul	2010	198	18

The quickest, easiest way to find the best woodworking ideas and projects

WOOD Magazine's complete collection of back issues on DVD-ROM


Features:

The user-friendly index of all back issues makes it easy to find any article. Click on the indexed article and go to it instantly! Or browse through the issues using the prominent bookmarks, linked covers, and table of contents.

Free up shelf space in your home and shop: Single disc and protective case fits 202 issues into the space of a slim paperback.


Save hundreds of dollars versus buying back issues. In fact, many of the most sought-after issues on this disc have been out of print for years and are no longer available in any other format.

Compatible with PC and Mac. If you don't already have it, Adobe Reader is included on the disc. Sorry, this disc does not play on a TV DVD player.

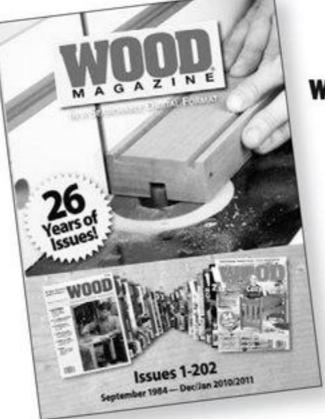

Order online at woodmagazine.com/DVDlibrary or by phone at 888-636-4478

\$149.95

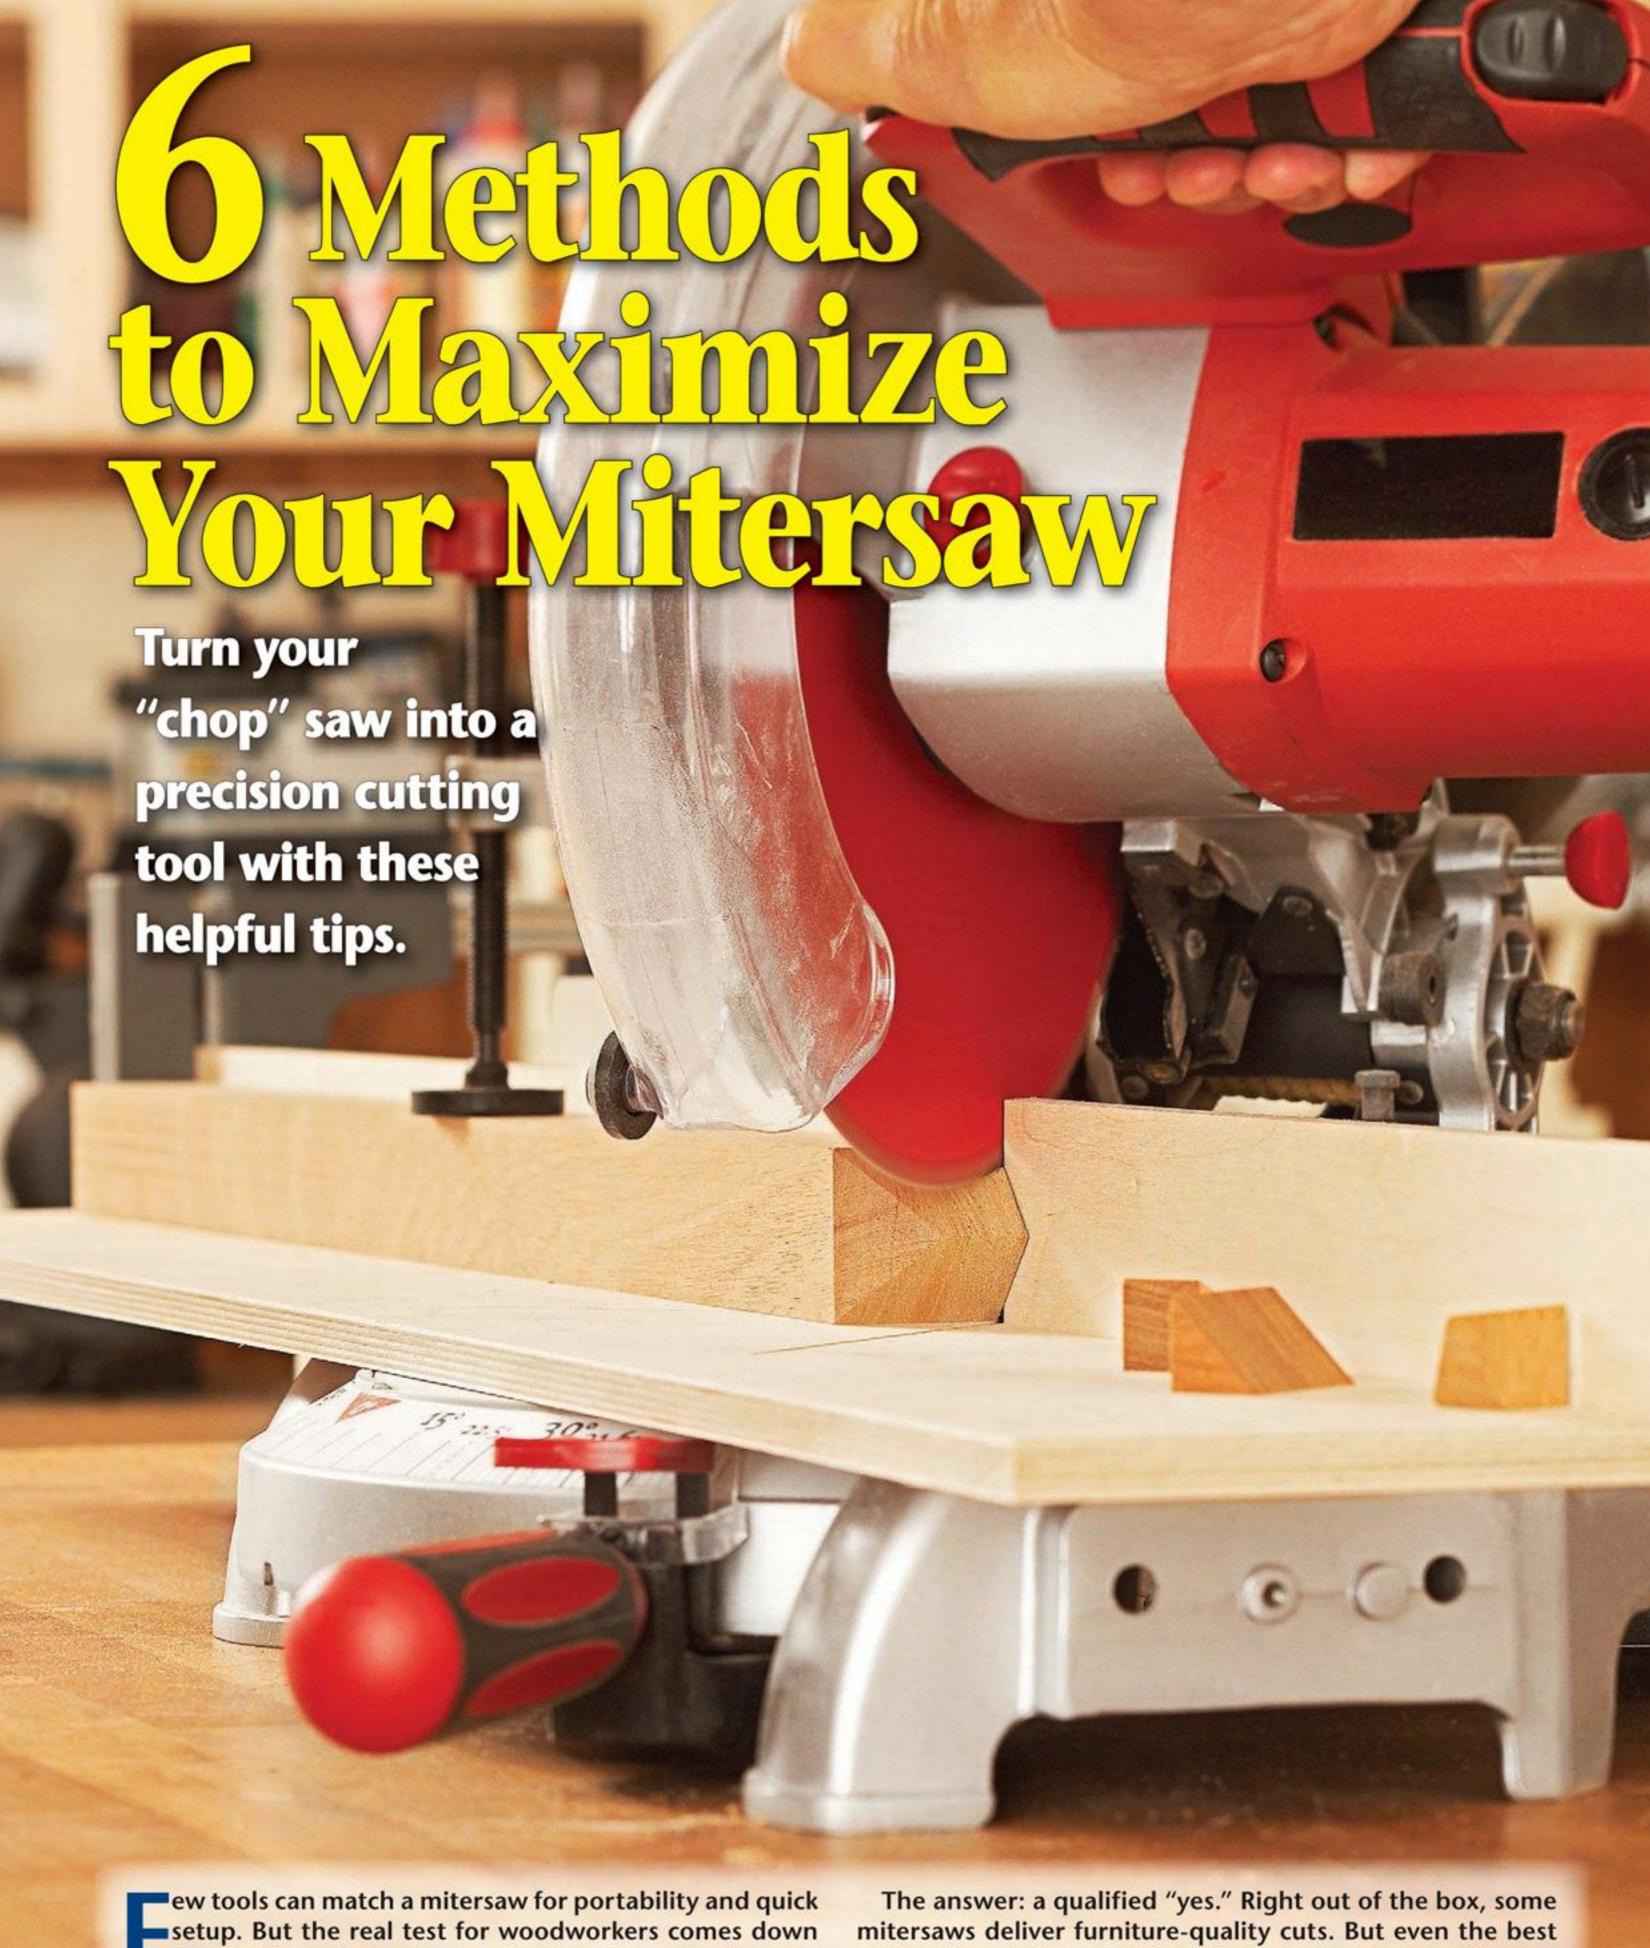

ew tools can match a mitersaw for portability and quick setup. But the real test for woodworkers comes down to this: Can it make clean, accurate cuts day-in and day-out in a workshop setting?

The answer: a qualified "yes." Right out of the box, some mitersaws deliver furniture-quality cuts. But even the best saws will yield better results if you put into action the following tips.

Improve cut quality


Tip #1: Upgrade the blade.

Most mitersaws come equipped with a general-purpose 24- to 40-tooth blade suitable for cutting framing lumber or decking, where clean cuts don't matter much. But to make crisp cuts in hardwoods, you'll need a high-performance blade with a low-degree hook angle. (See drawing at right.) Get an 80-tooth blade for a 10" mitersaw and a 96- or 100-tooth blade for a 12" model. (We recommend Freud's LU74R010 and LU74R012 blades.)



Doubling the number of teeth means each tooth takes a smaller bite, dramatically improving the quality of cut. And using a blade with sharp, clean teeth nets a cleaner cut.

KNOW YOUR HOOK ANGLE Positive hook angle Centerline of blade

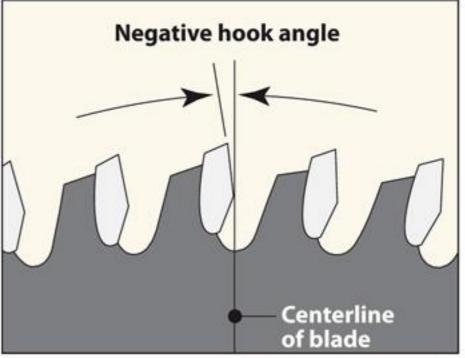

On a mitersaw, blades with positive hook angles above 10° "attack" the wood with aggressive cuts. Negative-hook blades ease into the wood with a "shaving" cut. Your best bet is a blade with a hook angle between 10° and -5°. (Look for this figure on the blade, its packaging, or the manufacturer's Web site.)

Tip #2: Back up your cuts.


Even if your mitersaw comes with a zero-clearance throat insert plate, it won't be long before overlapping bevel and miter cuts erode that close support. And most mitersaws use 1/8" or thinner plastic inserts, making it nearly impossible to make your own inserts from plywood or MDF.

Instead, install a quick-and-easy auxiliary table and fence made of plywood,

MDF, or hardboard, as shown below, and you've got instant zero-clearance support to prevent tear-out where the blade exits the cut. Of course, after you make two cuts at different settings, the support between those cuts will fall away. Still, it will continue to give support on one side, so put your "keeper" piece to that side. When your auxiliary fence and table no longer do the job, simply replace them with new ones.

Tip #3: Stop before you lift.


After making a cut on your mitersaw, always allow the blade to stop spinning before lifting the saw. Prematurely raising it could score the end of your workpiece. The spinning blade could also snag the cutoff and dangerously propel it at a high speed.

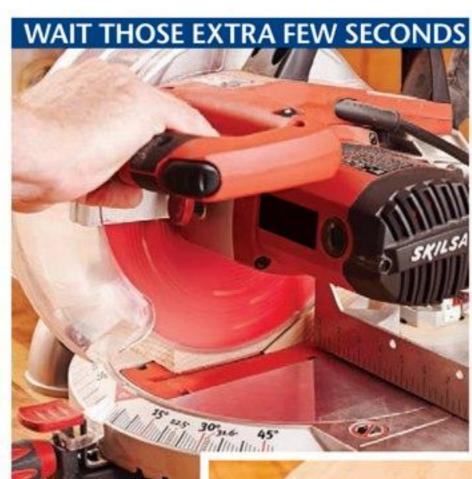

After lifting a spinning blade (above) we chalked the cut. It revealed scoring marks on the end grain (right).



For the quickest setup, use double-faced tape to attach an auxiliary table and fence to the saw's table and fence.

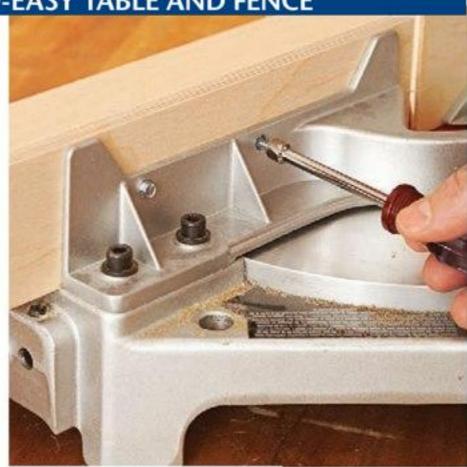


For a longer-lasting backer, attach an auxiliary fence with screws, after screwing the table to the fence.

Aim for greater accuracy

Tip #4: Get reliable help.

If your mitersaw doesn't cut perfectly square at 90°, check the owner's manual for the necessary adjustments and dial it in for perfect cuts. The best saws have miter scales that you adjust to correct inaccurate settings, but with most saws, you adjust the fence to the blade—often a finicky task. Some saws don't have any adjustment at all.

If your saw's scale proves unreliable (or unadjustable), put your trust instead in reliable squares, drafting triangles, angle blocks, or setup guides to position your saw for each cut. Be sure to reference your guide or square against the blade's flat body rather than the teeth to ensure absolute accuracy.

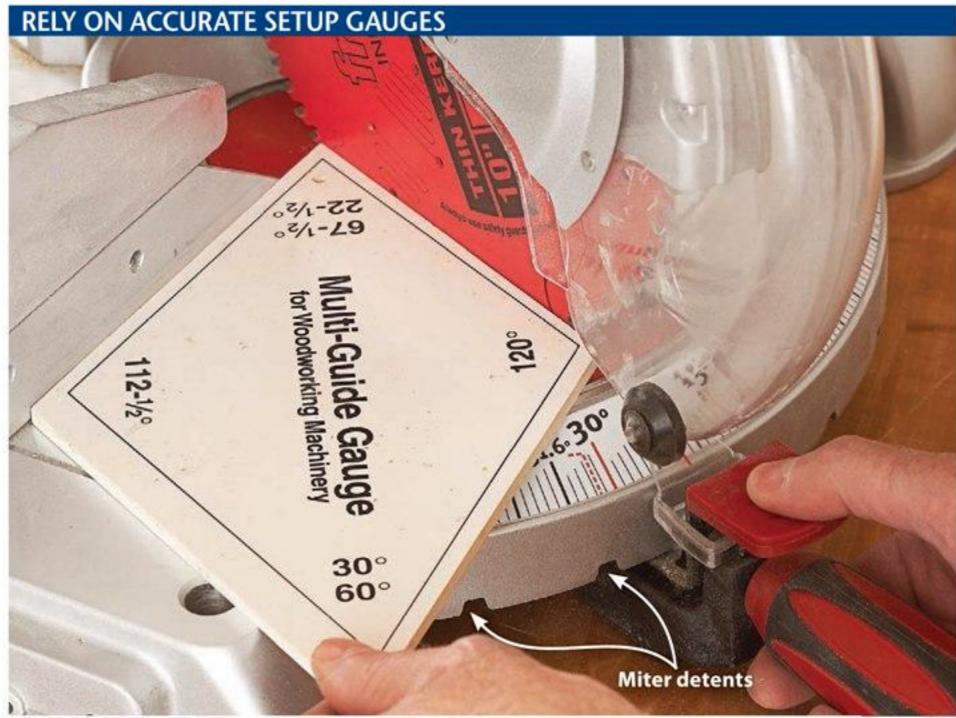

If your saw wants to drop into an inaccurate detent, bypass it and secure the miter lock while aligning the blade to a known-to-be-accurate gauge.

Tip #5: Extend your support.


Most mitersaw tables measure about 18" wide, and some include extension wings that add another foot or two of stock support when pulled out. But for longer workpieces that prove tippy on these setups, you need support to prevent boards from tilting or lifting off the table. You can do a few things here to ensure precision.

First, add a couple of scrapwood blocks that match the saw's table height, placing them near the ends of your boards. Or mount your mitersaw on a collapsible stand that includes workpiece supports and stops. These sell for \$100–\$300.

For a third option, particularly if you dedicate your saw to a bench in the shop, make your own extensions with measuring rules on each side of your saw. Custommake a bench or portable system—you can find project plans at woodmagazine. com/mitersupport—or buy a premade setup, below, for less than \$200. Add flipstops or clamp-on stopblocks for repeated cuts of the same length.

Tip #6: Sneak up on cuts.

Mitersaw blades can flex during tough cuts in hardwoods, but you can prevent this by making your cuts in two steps. First, make an initial cut about 1/16" to the waste side of your cut line. Then cut to the line. This finishing cut, about half as wide as normal, will be cleaner and spot-on square.

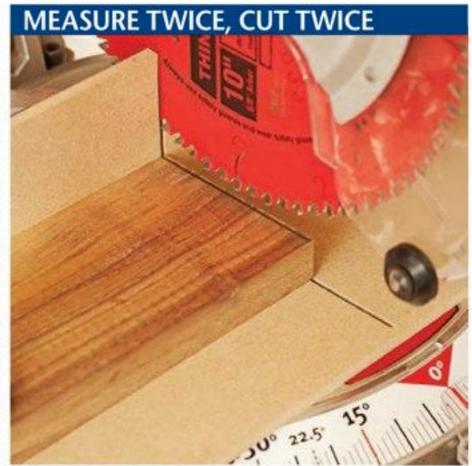


After removing the cutoff, nudge your workpiece closer to the blade until the teeth line up with the mark, and make the final cut.

Produced by **Bob Hunter** with **Kevin Boyle** and **Jeff Mertz**

Sources

Miter table systems: Biesemeyer 6' Miter Table, 10" saws, #78-806, \$175; 12" saws, #79-806, \$195; mikestools.com or 714-558-8360. Precision Trak & Stop 8' System, #KMS8000, \$140, Kreg Tool, 800-447-8638 or kregtool.com.



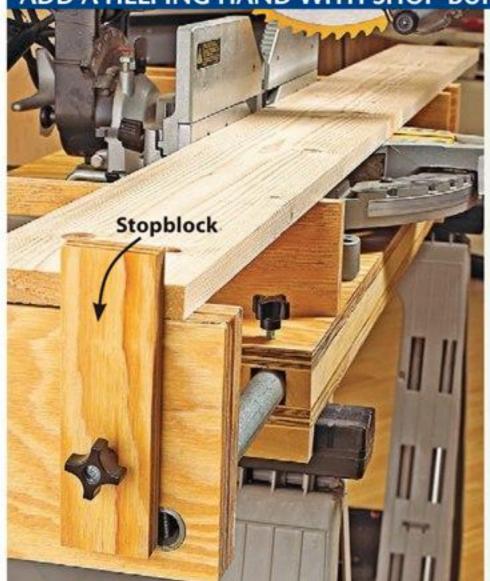

Using a mitersaw platform with telescoping extensions gives you horizontal support as well as a stopblock for making repeated cuts.







PROJECT HIGHLIGHTS

- Overall dimensions: 6" wide \times 7" deep \times 8½" high.
- Find a variety of glass globes and all the hardware at a home center.
- Rummage through your scrap bin for wood for several machines.

simple to build and simple to use defines this child-pleasing project. You need only push in its dispenser to allow a treat to drop into a copper cap. Pulling the dispenser out retrieves the tasty treat.

Before machining any parts, measure the globe that holds the gumballs. (You find them in the lighting department at home centers and hardware stores.) The base of our globe measured 31/8" in diameter. If you use one of a different size, adjust dimensions to fit it.

Start body-building

From 8/4 stock (or laminated stock), prepare a 1½×1¾×16" blank. (We used walnut.) From this blank, cut the back (A) and dispenser (B) to size [Materials List, page 54]. Set these parts aside for the moment.

2Rip or plane the remaining blank to 13%" thick. Cut the two sides (C) to length from this blank.

Retrieve the back (A) and glue it between the sides (C), flush at the top, bottom, and back [Drawing 1].

Top it off


Cut the top (D) from ¾"-thick stock to match the length and width of

the body (A/C) [**Drawing 1**]. Lay out and drill ½2" holes %" deep for the two setscrews that hold the globe in place. Use a bolt to tap threads in each hole [**Shop Tip** on *opposite page*].

2Set a compass to draw a circle 1/8" larger than the globe's base; then lay out the opening centered on the top (D). (Don't change this compass setting—you'll need it again shortly.) Drill a 3/8" starter hole inside the circle, and then jigsaw or scrollsaw to within 1/16" of the line. Sand up to the line using a sanding drum mounted in a drill press.

Install a 1/8" round-over bit in your table-mounted router, and rout round-overs on the circle cutout and the outside edges of the top (D) [Drawing 1].

Glue the top (D) to the body assembly (A/C) so the edges are flush all

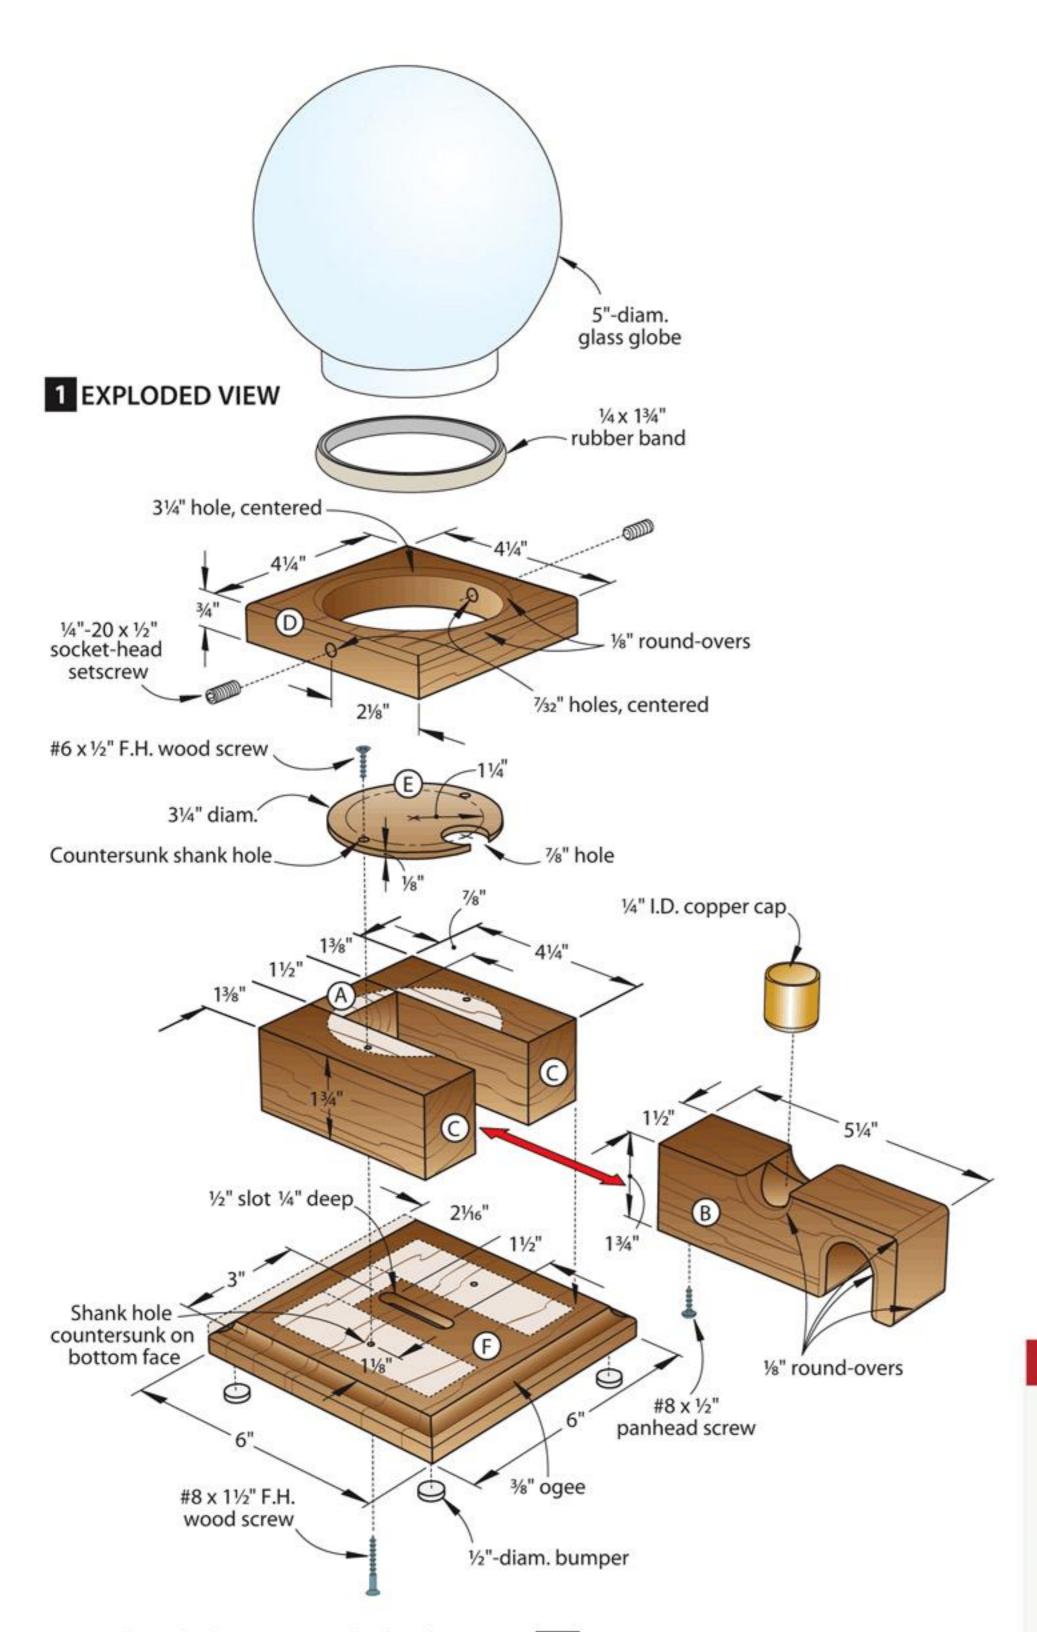



around, and the setscrew holes face to the sides. After the glue dries, finishsand the assembly to 220 grit.

Going in circles

Mark a point for the center of the restrictor plate (E) on a piece of 1/8" tempered hardboard. Using the compass with the saved setting, draw a circle around this centerpoint. To lay out the hole that the gumball falls through, reset the compass to 11/4" and, using the

1a DISPENSER SECTION VIEW

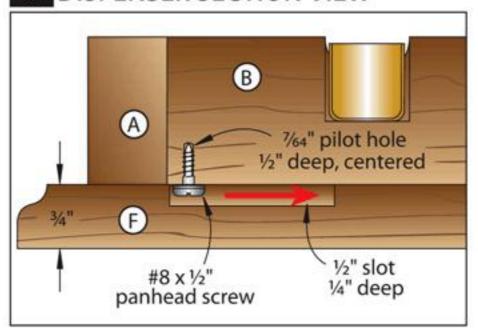


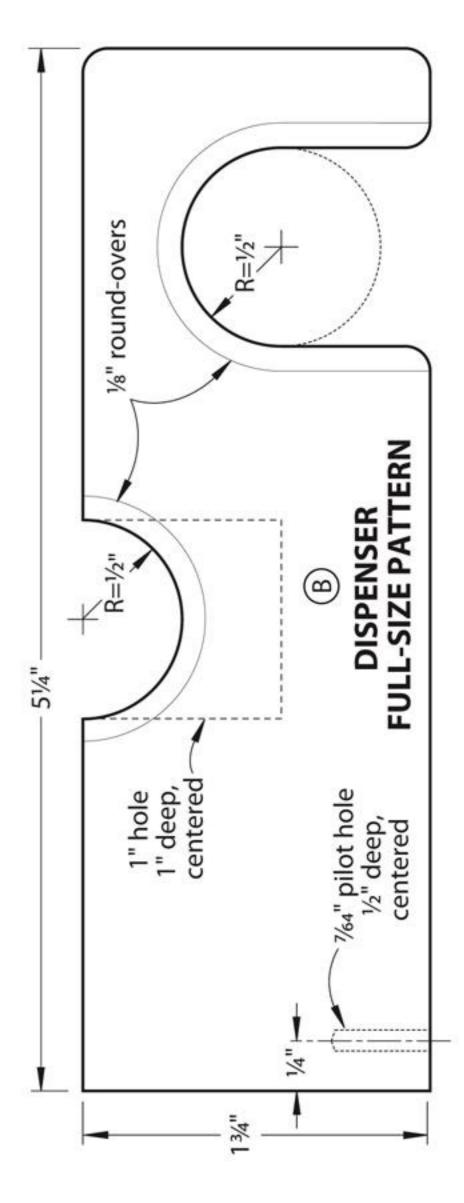

SHOP TIP

Use a bolt to tap threads

To prethread the holes for the setscrews, drive a ¼"-20 hexhead bolt into each one. Rub some wax on the bolt threads so it turns easily. Keep the bolt perpendicular to the edge as you go, and back it out now and then to clear shavings.

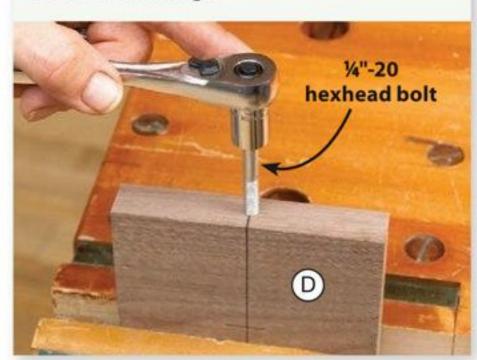

same centerpoint, draw a circle inside the first [**Drawing 1**]. Drill a %" hole with its centerpoint on the inner circle.

2Cut the restrictor plate (E) on the outside layout line, and check that it fits inside the opening in the top (D). Sand the restrictor plate to fit if needed. Then, drill and countersink two %4"-diameter shank holes [**Drawing 1**]. Screw the restrictor plate to the body assembly (A/C/D), centering the hole between the sides (C) and toward the open end of the body assembly.

Make the dispenser

Photocopy the **Dispenser Pattern** from *page 53*, and spray-adhere it to the dispenser (B). Scrollsaw or jigsaw the finger pull and cup locations just outside the lines; then sand the cutouts smooth. Round over the edges where shown in **Drawing 1**, using a ½" round-over bit in a table-mounted router.

2Chuck a 1" Forstner bit into the drill press and bore the hole for the gumball cup in the dispenser (B) [Photo A].

3 Drill a pilot hole where indicated on the dispenser pattern, and drive in a #8×½" panhead screw [Drawing 1a].

Base, assembly, and gum

Cut the base (F) to size. Lay out and drill the ends of the slot that traps the screwhead in the bottom of the dispenser (B) [**Drawing 1**]. Drill out the waste between the holes, and clean up the slot edges with a chisel [**Photo B**].


2Chuck a %" ogee bit into a table-mounted router. Rout around all four sides of the base (F). Start across the end grain so any chip-out is removed when you rout the adjacent edge grain.

Clamp the body assembly (A/C/D/E) to the base (F) centered front to back and side-to-side. Drill and countersink 5/32" shank holes through the base [**Drawing 1**] and 7/4" pilot holes through the shank holes and into the sides (C).

Unclamp the pieces, finish-sand all parts to 220 grit, and then apply a finish. (We applied three coats of sprayon polyurethane, buffing between coats with a 320-grit sanding sponge.)

Note: Allow the finish to dry thoroughly before filling the machine with gumballs. Affix the bumpers to the base bottom.

5 Put the dispenser (B) in place between the base (F) and body assembly (A/C/D/E). Confirm that the dispenser moves in and out easily and that the panhead screw on its bottom prevents the dispenser from sliding out

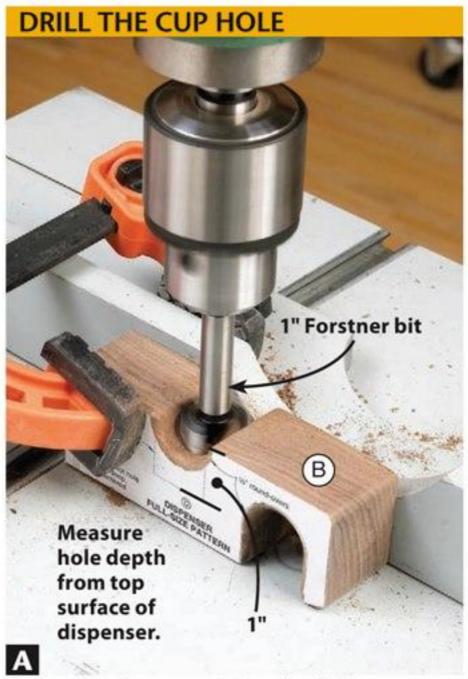


Clamp the dispenser (B) to the drill-press fence, and center a 1"-deep hole in the cutout for the gumball cup.

completely. (If the dispenser sticks slightly, wax it.) Screw, don't glue, the body assembly to the base.

Thread the setscrews into the top (D) so they are just flush with the inside edge of the cutout. Place the rubber band around the base of the globe. Fill the globe with gumballs, turn the machine upside down, and place it onto the globe. Flip the machine and globe upright, and lightly snug the setscrews to secure the globe. (Over-tightening the screws could crack the glass.) Place a copper cap in the dispenser (B). Push the dispenser in, pull it out, and enjoy in moderation.

Produced by Craig Ruegsegger with Jeff Mertz Project design: Richard Burton, Nokomis, Fla. Illustrations: Roxanne LeMoine; Lorna Johnson

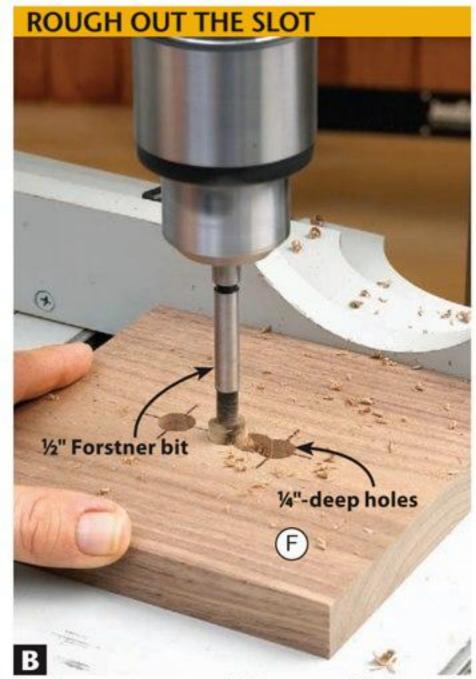

Set the stop on your drill press to ¼" deep. Bore the end holes first, then drill a series of overlapping holes between them.

Materials List


	FII				
rt	T	W	L	Matl.	Qty.
back	11/2"	134"	7∕8"	W	1
dispenser	11/2"	1¾"	5¼"	W	1
sides	13/8"	13/4"	4¼"	W	2
top	3/4"	4¼"	4¼"	W	1
restrictor plate	1/8"	31/4"	diam.	НВ	1
base	3/4"	6"	6"	W	1
֡֡֜֜֜֜֜֜֜֜֜֜֜֜֜֜֜֜֜֜֜֜֜֜֜֜֜֜֜֜֜֜֜֜֜֜֜	back dispenser sides top restrictor plate	back 1½" dispenser 1½" sides 1¾" top ¾" restrictor plate ½"	tt T W back 1½" 1¾" dispenser 1½" 1¾" sides 1¾" 1¾" top ¾" 4¼" restrictor plate ½" 3½"	back 1½" 1¾" ½" 1¾" 5¼" dispenser 1½" 1¾" 5¼" 5¼" sides 1¾" 1¾" 4¼" 4¼" top ¾" 4¼" 4¼" 4¼" restrictor plate ½" 3¼" diam.	T W L Matl. back 1½" 1¾" ½" W dispenser 1½" 1¾" 5¼" W sides 1¾" 1¾" 4¼" W top ¾" 4¼" 4¼" W restrictor plate ½" 3¼" diam. HB

^{*}Parts cut from one blank. See the instructions.

Materials key: W-walnut, HB-tempered hardboard. Supplies: Spray adhesive, #6×½" flathead wood screws, #8×½" panhead screw (1), #8×1½" flathead wood screws (2), ¼"-20×½" socket-head setscrews (2), ½"-diam. bumpers (4), ¾" inside-diameter copper cap, ¼×1¾" rubber band, 5"-diam. glass globe.


Bits: 36" ogee, 36" round-over router bits; 32", 36", and 1" Forstner bits.

Find more gift projects at woodmagazine.com/gifts



1/8 x 5 x 5"
Tempered hardboard



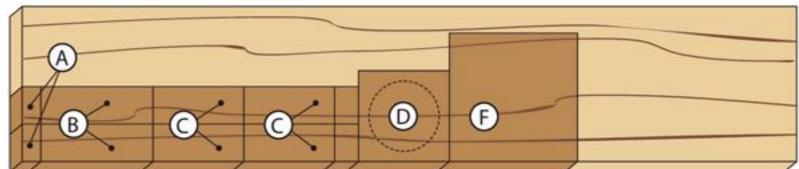

3/4 x 7 x 36" Walnut (2 bd. ft.)

Give Yourself the Ultimate Gift



Super Jigs Dovetail Jigs in 3 Sizes



Rout Classic Dovetail Joints

Create all of these joints right out of the box!













Super FMT **Mortise & Tenon Jig** Router not included



Rout Strong Mortise & Tenon Joints

One guide, one bit, one setup. It's that easy!



















What's under your tree?







these days (sliders and nonsliders alike), a 10" sliding compound mitersaw provides the best combination of accuracy, cut capacity, power, price, and portability. Nonsliding saws, though reliably accurate, lighter, and less expensive, lack the crosscut capacity of sliders—up to 50 percent less with 10" models and 33 percent less with 12" saws. On the other hand, 12" sliders provide an extra inch or so of vertical cut capacity (a bonus when cutting moldings standing against the fence), but crosscut about the same

as 10" sliders, weigh up to 40 percent more, and cost another \$100 to \$200. If we've convinced you of the merits of a 10" slider, read on to find out which one gives you the most bang for your buck.

Accuracy proves critical for fine woodworking

In a woodshop setting a mitersaw must deliver precise cuts for tight-fitting joinery. Fortunately, all 10 tested sliders met the challenge, although most required some adjustments before they could make dead-on cuts. To ensure the saws could maintain that accuracy, we made loads of cuts, rocked them back and forth through their miter and bevel ranges, tossed them into the back of a pickup truck, and even whacked them a few times with a board to simulate wear. All held fast.

Count on miter settings for repeatable cuts

Each of the tested saws has miter detents for 0°, 15°, 22½°, and 45° on the left and right sides [**Photo A**]. All but the Ryobi TSS100L also have a stop at 31.6° on both sides for cutting crown molding lying flat. Five saws (Bosch 4405, Bosch




4410, DeWalt DW717, Jet JMS-10SCMS, and Makita LS1016L) also have a 60° detent on one side. That's nice if you need it because you can't even make that cut on a tablesaw without a jig or miter-gauge upgrade. For occasions when you need to tweak a miter setting by fractions of a degree—


custom-cutting an out-of-square joint, for example—it pays to have a mitersaw with a detent override. This feature [Photo B] lets you nudge the miter-angle setting ever so slightly without engaging the detent; then lock it securely in place. Saws with a detent override: Bosch 4405

SETTING MITER ANGLES: THE BEST SAWS MAKE IT EASY Sandan Maghar Markar Markar Mark **Detents**

To calibrate DeWalt's miter scale, simply lock the blade square to the fence, and then align the metal miter-scale plate.

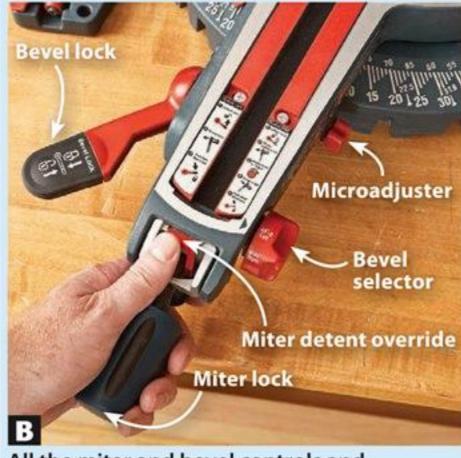


All the miter and bevel controls and instructions for using them on the Bosch 4410 sit at the front of the saw for easier use.

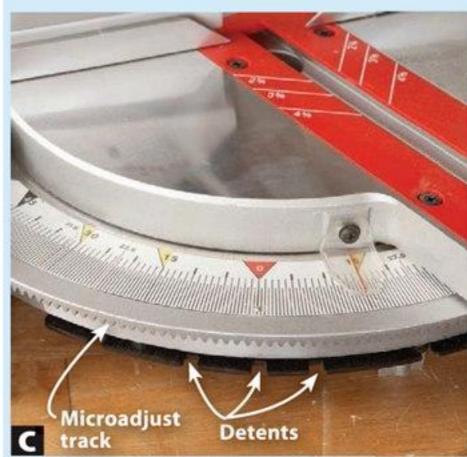

We found the Craftsman 21201 scale easiest to use because of its half-degree increments; the other tested saws have 1° markings.

and 4410, Craftsman 21201, and DeWalt. The Bosch 4410 and Craftsman 21201 also incorporate a microadjuster [Photo C], enabling you to fine-tune a miter setting with mechanical precision.

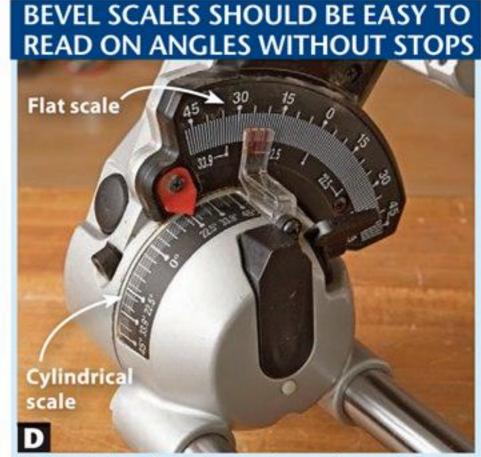

Makita's bevel angle can be set by reading either of two scales, giving you good visibility no matter which way you tilt the saw.



The fat cursor line and closeness of Ryobi's bevel-angle markings make it difficult to accurately set an angle without a stop.

Easy-to-use features make bevel cutting hassle-free

All the saws tilt at least 45° to the left to make compound cuts, a combination of bevel and miter angles. And most (see the chart on page 60) tilt at least that much to the right. If you plan to make a lot of beveled or compound cuts, you'll appreciate the up-front bevel lock on the Bosch [Photo B] and Jet saws. DeWalt's bevel lock sits on top of the sliding rails—not quite as accessible, but still better than the rear-mounted locks on the rest.

The best bevel-action mitersaws have cylindrical scales [Photo D] on the rear hub with wide spacing between lines, making them easier to read. For quick reference, all the saws have bevel stops at 0° and 45°, and most also have crownmolding stops or markings at 33.9°. The DeWalt and Makita models also have 22.5° stops.

Seek the support of tall fences and long tables

For those times when you cut tall or long stock, you'll appreciate the support from a good mitersaw fence and table. The Bosch 4410, Craftsman 21201, DeWalt, Kobalt SM2505LW, and Makita have the best fences, standing at least 4" high with top sections that slide out of the way for making bevel cuts. Conversely, fences on the Jet and Ryobi, both below 2", lack sufficient height to support workpieces twice that height. For these, attach an auxiliary plywood fence for maximum workpiece support.

For workpieces longer than 2', you'll like the added support of extensions, standard equipment on both Bosch and

Craftsman saws as well as Kobalt and Ryobi. In addition to support, you get a work-holding clamp on all the saws. We prefer clamps that mount behind the fence and hold stock down against the table, rather than the horizontal clamp on the Craftsman 21201, shown on the next page.

Other factors to consider before getting a slider


Power. Although all the saws cut through 4×4 treated pine with no difficulty, three bogged down when we crosscut 12"-wide, 1¾"-thick white oak: the Craftsman 21237, DeWalt, and Kobalt. Still, they made the cut when we slowed the feed rate.

- **Cut capacities.** We didn't find significant differences between the test saws' crosscut capacities, no matter the miter or bevel angles. However, when cutting stock on edge against the fence, the DeWalt (6") and Makita (5¼") have a 1–2" advantage over the rest of the field.
- Plunge, slide action. For safest operation we prefer a saw that plunges and slides with no hitches or stiffness. The action on the DeWalt and Makita felt smoothest.
- **Cut quality.** We tested each saw in various hardwoods as well as treated pine, using both the factory blade and a premium replacement blade. Makita's blade produced the best factory cuts out of the box, with no tear-out and only

The inside scoop on 10" sliding mitersaws

Bosch 4405, \$425

877-267-2499, boschtools.com

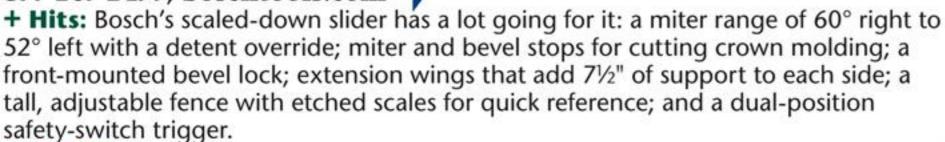

- Misses: This saw bevels only to the left. Its cast-aluminum miter scale has wide increment markings and proves difficult to set non-detent angles. The blade guard creates a slight hitch that you must push through before you can plunge the saw. You cannot adjust the throat-plate kerf opening. Its 4½¹ power cord almost always will need an extension cord. And the porous dust-collection bag allows fine dust to pass through and become airborne.




Bosch 4410, \$550

877-267-2499, boschtools.com

+ Hits: For \$125 more than the Bosch 4405, you get the same miter range and detents with override. But this model adds a microadjuster, right-tilting bevel capabilities with a better scale, table extensions for 7½" of more support, a multiposition handle, and nearly twice the power-cord length.

- Misses: It has the same miter scales, blade-guard hitch, throat plate, and dust bag as the 4405. In addition, the blade guard does not lock out of the way when changing blades. At 62 pounds, it's the heaviest saw in the test.



+ Hits: With few frills, this saw proved best among the \$250-and-less models, with a miter range of 50° right and left with nine detents, as well as table extensions and cutoff stops.

- Misses: It bogged down when cutting thick hardwoods, requiring a slower feed rate, and we found the plunge and sliding action stiff. The 21237 bevels only to the left, and when making 45° beveled cuts the blade guard gets in the way and must be lifted manually to line up a cut. Its 4½' power cord almost always will need an extension cord. There's no onboard storage for the blade-changing tool.



slight scoring marks. When we replaced all blades with a Freud 80-tooth crosscut model (#LU74R010), each saw produced nearly flawless cuts.

We prefer a horizontal handle because of its natural hand positioning—Hitachi has the only vertical handle—it's really a matter of preference. The Bosch 4410 gives you the ability to choose with a handle that rotates 90° to four positions.

All saws except the Craftsman 21201, DeWalt, Jet, and Ryobi include a secondary thumbswitch that must be depressed before you can engage the saw's trigger. Bosch's saws feature dual thumbswitches, making them equally suited for left-handed or right-handed use.

- Lasers. The best cut-indicating lasers (Hitachi's and Makita's) mount in front of the blade and shine down in clear, bright red for easy use; they're also simple to adjust. Although Jet's rearmounted laser tends to get covered with dust, its bright green beam proved most visible in bright sunlight.
- **Dust collection.** By nature, all mitersaws have difficulty gathering the shotgun blast of debris into the attached bag. Still, Hitachi and Makita deserve credit for doing a better job than the rest. Hooking up a shop vacuum to all the tested saws greatly improved their dust collection, but nonstandard port sizes required adapters and duct tape to fit the hose to most saws.
- Depth-of-cut limits. You might not know it, but sliding mitersaws have a depth stop that you set to limit the depth of cut, as you'd do for cutting dadoes, rabbets, or half-laps with repeated cut-and-slide passes. (To learn how to cut precision dadoes, rabbets, and half-lap joints read "Sliding Mitersaw Joinery" on page 20.) The best saws—all but the Bosch 4405, Hitachi, and Ryobi—let you set a stop and slide it aside for full-depth cuts, and then be able to return to it quickly.
- **Throat plates.** The DeWalt, Hitachi, Jet, and Makita saws have adjustable throat plates that you can close up against the blade for zero-clearance protection from wood tear-out.

Craftsman 21201, \$450

800-383-4814, craftsman.com

+ Hits: The only model in the test with a miter scale marked in half-degree increments, it also has a detent override and microadjuster for fine-tuning cuts. It miters and bevels 47° both right and left. The single extension wing with cutoff stop adds 25" of workpiece support.

Misses: Its plunge and sliding actions were stiff. Although a useful feature, the microadjuster drags against the saw table when changing miter positions. Its horizontal workpiece clamp sometimes lifted boards slightly off the saw table; we'd prefer a traditional hold-down clamp. You cannot adjust the throat-plate kerf opening.







DeWalt DW717, \$500

800-433-9258, dewalt.com

+ Hits: This saw tops the test in miter range (60° left, 52° right) with 10 detents and an override, as well as the largest bevel range (48° each way) with seven stops. And it can cut a 6"-wide board on edge, nearly double most of the saws. Should it ever need realignment, the miter scale recalibrates easily, and its lever-action miter lock is our favorite because it locked solidly, was easy to lift and depress, and didn't stick out as far as the competitors.

Misses: It bogged down slightly when cutting thick hardwoods, requiring a slower feed rate. When making 45° beveled cuts the blade guard gets in the way and must be lifted manually to line up and make a cut. The blade guard does not lock out of the way when changing blades. Optional extension wings cost \$35 each.

Hitachi C10FSH, \$450

800-706-7337, hitachipowertools.com

- **+ Hits:** One of only two tested models with a soft-start motor, it does not "kick" at start-up and shutdown. It's the only saw in the test to identify angle settings for crown molding with a 45° spring angle, and it still has the traditional crown-molding stops. Blade changes were easiest on this unit because the blade guard locks out of the way and the arbor locks in place. It comes with a 5-year warranty.
- Misses: Table pivoting felt stiffer than most when changing miter settings. This model's vertical handle was less comfortable in our hands than a horizontal handle. There's no onboard storage for the blade-changing tool and it lacks table extensions.



59

Jet JMS-10SCMS, \$460

800-274-6848, jettools.com

+ Hits: Color-coded miter-scale markings help locate the most-used angles quickly, and it has a 60° miter detent on the right. We like its front-mounted bevel lock for easy access and its green laser for high visibility.

- Misses: Wide cutouts in the fence allow tall workpieces to tip backward when cutting. Without a detent override, its lever-type miter lock doesn't hold securely on the cusp of a miter detent. We found the plunge and slide actions, as well as the table pivot, stiff. It does not include table extensions.





Kobalt SM2505LW, \$200

800-445-6937, kobalttools.com

+ Hits: It has the best fence among the \$200 test models. Color-coded markings help to locate the most-used miter angles quickly. Built-in table extensions add 8" of support to each side with cutoff stops.

Misses: It bogged down slightly when cutting thick hardwoods, requiring a slower feed rate, and the sliding action and table pivot felt stiffer than most. This saw bevels only to the left, and the blade guard gets in the way when making 45° beveled cuts. Dust kept building up on the rear-mounted laser, lessening its usefulness. Activating the safety switch and trigger simultaneously proved awkward. We'd like to have a place on the saw to store the blade-changing tool.

Slide your mitersaw dollars to these models

By the end of our testing, two dual-bevel saws had risen to the head of this class: the Bosch 4410 and the Makita LS1016L. Both models provide test-leading miter ranges from 60° right to 52° left with rock-solid detents. The Bosch has nine miter detents and five bevel stops. We like its microadjuster for fine-tuning miter angles and its included table extensions for extra support.

But the Makita edges past the Bosch with a soft-start motor and more miter detents (10) and bevel stops (7). It also has the smoothest sliding and plunging action in the test, the tallest fence (by ½"), and the only factory-supplied blade capable of making furniture-quality cuts. For all this, the LS1016L earns our Top Tool honor.

If you'd like to get a slider but can't spring for the Makita, consider Craftsman's 21237 for just \$250, our Top Value. This saw has few amenities, but it's accurate when set up correctly, and, although slightly underpowered, it cuts acceptably with a slower feed rate.

Produced by Bob Hunter with Jeff Hall

MORE RESOURCES

- For a free video on techniques and tips for using a mitersaw, go to woodmagazine.com/mitersawvideo.
- For a review of 12" nonsliding compound mitersaws, go to woodmagazine.com/12mitersaw. \$

	10" S	LII	DIN	G CC)MP(ગ	JNC	MIT C	ERSA	WS	:
				MITE	ER .		Е	BEVEL	DIMENSI	ONS	
BRAND	MODEL	LASER TYPE (1)	RANGE (LEFT, RIGHT), DEGREES	LEFT-SIDE DETENTS, DEGREES (ALL HAVE 0, 15, 22.5, 45)	RIGHT-SIDE DETENTS, DEGREES (ALL HAVE 0, 15, 22.5, 45)	DETENT OVERRIDE? (YES, NO)	RANGE (LEFT, RIGHT), DEGREES (2)	STOPS, DEGREES (ALL HAVE 0, 45)	FOOTPRINT WITHOUT EXTENSIONS, INCHES (W×D) (3)	WIDTH, I NCLUDINGE XTENSIONS, I NCHES	
POCCH	4405	N*	52,60	31.6	31.6, 60	Υ	45*	33.9	43½×43	36	
BOSCH	4410	N*	52, 60	31.6	31.6, 60	Υ	45, 45	33.9	43½×44	37½	
CRAFTSMAN	21237	R	50, 50	31.6	31.6	N	45*	33.9	36¼×40	38	
CITAL ISMAN	21201	W	47, 47	31.6	31.6	Υ	47, 47	33.9	36½×42½	45½	
DEWALT	DW717	N#	60,52	31.6, 60	31.6	Υ	48, 48	22.5, 33.9	35×38	21¾	
HITACHI	C10FSH	Т	45, 57	31.6	31.6	N	45, 45	33.9	36½×41	20¾	
JET	JMS-10SCMS	R	45,60	31.6	31.6, 60	N	45, 45	33.9	41 × 42	21	
KOBALT	SM2505LW	R	50, 50	31.6	31.6	N	45*	33.9	35×39	41½	
MAKITA	LS1016L	Т	52, 60	31.6	31.6, 60	N	45, 45	22.5, 33.9	32½×35½	24	
RYOBI	TSS100L	R	46, 50	30	30	N	45*	None	41½×42	41	
NOTES											


NOTES

- (R) Rear-mounted single laser
 - (T) Top-mounted single laser
 - (W) Washer-mounted laser
 - (N) No laser
 - (*) Optional washer-mounted laser
 - (#) Optional top-mounted laser
- 2. (*) Single-bevel saws tilt only to the left.
- Measured as space required to allow full range of miter, bevel, and slide motions

WOOD magazine December/January 2010/2011

Makita LS1016L, \$500

800-462-5482; makitatools.com

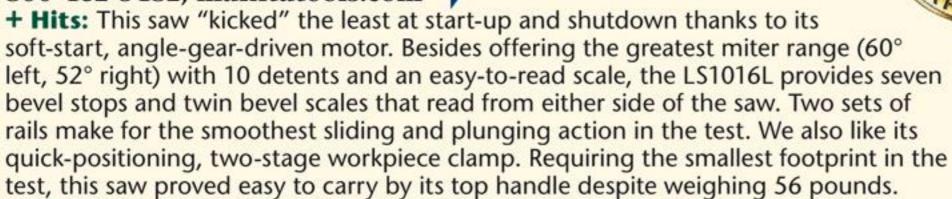

- Miss: Table-extension wings would be helpful, but you have to buy those separately (\$15 apiece).





Ryobi TS\$100L, \$200

800-525-2579, ryobitools.com

+ Hit: Extension wings add 10" of workpiece support left and right.

Misses: The miter detents on this saw felt the least positive in the test: A small bearing drops into shallow cutouts. It's the only test saw without crown-molding detents, and its short left-side fence allows tall workpieces to tip backward when cutting. This saw bevels only to the left, and the blade guard gets in the way when making 45° beveled cuts. The guard does not lock out of the way for blade changes, you cannot adjust the throat-plate kerf opening, and there's no onboard storage for the blade-changing tool.

Ţ,	AL	LN	ЛΑ	KE	TH	ΗE	Cl	JT	, 9	50	M	E	B	ΕŢ	T	ER	RT	Ή	Al	N	01	TH	E	RS	5	200						y .
	CU	TTING	CAPA	CITIE	S, INC	HES							PEI	RFOF	RMAI	NCE	RATII	NGS	(4)							ACCESSO	ORIES (5)					
		MAX.\	WIDTH		MAX.H	HEIGHT		MI	TER			BE\	/EL						SWITCH													
	AT 0° MITER, 0° BEVEL	AT 45° MITER, 0° BEVEL	AT 0° MITER, 45° BEVEL	AT 45° MITER, 45° BEVEL	VERTICAL AT FENCE (%" STOCK)	DIRECTLY BELOW ARBOR	ACCURACY OF STOPS	EASE OF CHANGING POSITION	RELIABILITY OF LOCK	SCALE READABILITY	ACCURACY OF STOPS	EASE OF CHANGING POSITION	RELIABILITY OF LOCK	SCALE READABILITY	OBSERVED POWER	EASE OF PLUNGE AND SLIDE	ABSENCE OF DEFLECTION	PORTABILITY	EASE OF USING HANDLE AND POWER	EFFECTIVENESS OF FENCE	QUALITY OF FACTORY BLADE	EASE OF CHANGING BLADE	EFFECTIVENESS OF BLADE GUARD	EFFECTIVENESS OF LASER	DUST COLLECTION, AS EQUIPPED	STANDARD	OPTIONAL	CORD LENGTH, FEET-INCHES	WEIGHT, POUNDS	WARRANTY, YEARS	COUNTRY OF ASSEMBLY (6)	SELLING PRICE (7)
	121/4	8%	121/4	8%	3%	3%	Α	A-	A	В	Α	Α	Α	A-	Α	A-	Α-	В	Α	B+	B+	A-	Α	NA	C-	C, D, W	H, P, R, S	4'6"	57	1	С	\$425
	12%	8%	121/8	8¾	3¾	3%	Α	A	Α	В	Α	Α	Α	Α	Α	A-	Α	B-	Α	A-	B+	B+	B+	NA	C-	C, D, S, T	H, P, R	8'6"	62	1	Т	550
	12½	9	12%	91/4	3%	3%6	Α	A	Α	Α-	Α	В	A	B-	B+	A-	A-	B-	B+	В	В-	B-	C	B-	В	C, D, S, T	Р	4'6"	40	1	С	250
	12%	8%	11¾	8¾	4	3%6	Α	В	Α	Α	A-	В	A-	B+	A	В	A-	B-	B-	Α-	B-	A-	Α	C	В	D, H, R, S, W	Р	6'	53	1	Т	450
	12%	8%	12%	9	6	3%6	Α	A-	A	A-	Α	Α	Α	A-	B+	Α	Α	В	В	Α	В	B+	C	NA	В	C, D	L, P, R, S, W	6'	51	3	М	500
	121/4	8%166	12	8½	3½	3%16	Α	В	Α	A-	Α	В	Α	A-	A	A-	A	A-	В	В	B+	A	A	A-	B+	C, D	P, R, S, W	6'	43	5	J	450
	121/4	8%	12%	8½	41/8	3%	Α	В	В	В	Α	Α	Α	Α	Α	В	A-	B+	В	D	C	B-	Α	B+	B-	C, D	W	7'6"	50	3	Т	460
	12	8½	12	8¾	3¾	3%	Α	В	Α	Α-	Α	В	Α	B-	B+	B+	B+	B+	C	Α-	C	B-	C	B-	B-	C, D, S, T		6'6"	40	3	С	200
	12%	8%	12	8½	51/4	311/16	Α	Α-	Α	A-	Α	B+	Α	A	Α	A	Α-	Α-	A-	Α	A-	A-	Α	Α-	B+	C, D	H, P, R, W	7'	56	1	U	500*
	12½	8%	12%	9	3½	31/2	В	В	A-	В	A-	В	A-	D	Α	B+	B+	В	В	C-	D+	B-	C	B-	C-	C, D, W	Р	6'6"	43	2	C	200

4. A

Excellent

Good

B C

Fair Poor

NA N

A Not Applicable

- 5. (C) Hold-down clamp
 - (D) Dust bag
 - (H) Horizontal clamp
 - (L) LED lamp
 - (P) Portable stand
 - (R) Crown-molding stops
 - (S) Cutoff stop
 - (T) Table extensions
 - (W) Extension wings

- 6. (C) China
 - (J) Japan
 - (M) Mexico
 - (T) Taiwan
 - (U) United States
- Prices current at time of article production and do not include shipping, where applicable.
 - (*) Available without laser for \$450

Just in time for holiday giving

Keepsake Box



hree species of wood—and a bit of aluminum—give this little project from one e box ends (I

aluminum—give this little project lots of visual appeal. (And don't worry about working with aluminum—you already have everything you need to cut and shape it.) The rabbeted legs lift the box and wrap around each cor-


ner to conceal any lessthan-perfect miter joints, while under the lid, items rest softly on a felt-padded bottom. For additional design options for this box and others, see page 66.

Build the box


Prepare a 3/8×4×30" blank. (We used lacewood.) Rip a 2"-wide strip

from one edge for the box sides (A) and box ends (B). Save the offcut for the lid ends (F) and lid sides (G).

In your tablesaw, set up a 1/4" dado blade and raise it 3/16" above the table. Attach an auxiliary fence to the rip fence and cut a 1/4" rabbet for the lid along the

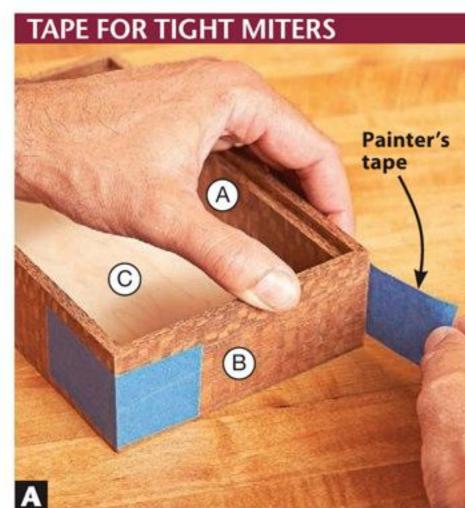

Miter joints can slip when clamped. Painter's tape stretched taut around each corner holds the joints closed while the glue dries.

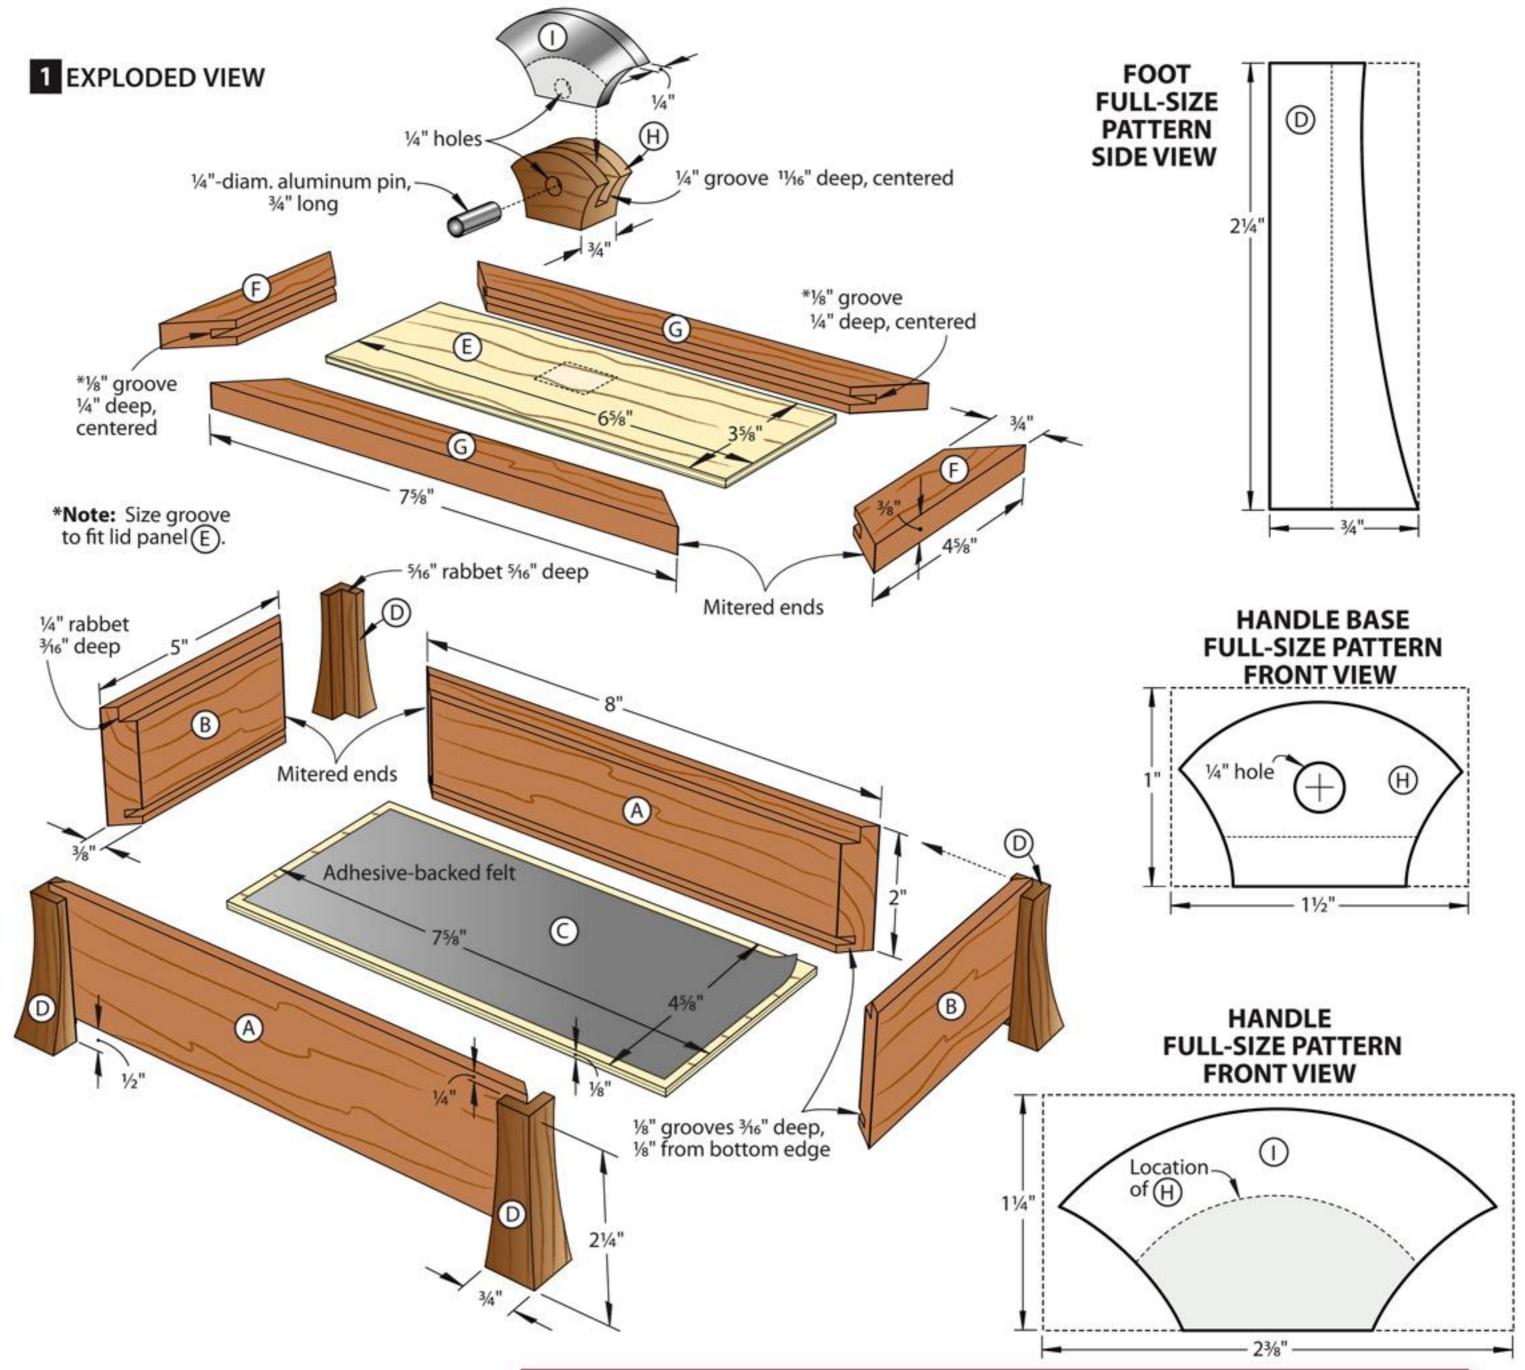

top edge of the blank [**Drawing 1**]. Switch to a combination blade and cut the groove for the bottom (C). Bevel-cut the blank in half [**Shop Tip**]; then bevel-cut a box side (A) and box end (B) from each half. Sand the inside faces to 220 grit.


3 Dry-fit the box sides (A) and ends (B) and measure for the bottom (C). Cut the bottom to size from 1/8" plywood [Drawing 1]. Assemble the box, gluing the bottom into the grooves [Photo A].


On one edge of a ¾×¾×12" wenge blank, rout or cut a ¾6" rabbet ¾6" deep. Crosscut the feet (D) to length from this blank [**Drawing 1**]. Make a copy of the **Foot Pattern**, above right, and sprayadhere it to a piece of ¼" hardboard or plywood. Bandsaw and sand the hardboard to the pattern lines, then use this

SHOP TIP


Spot-on miters and bevels

Before bevel-cutting or mitering project parts, check the accuracy of your blade or miter-gauge setup by cutting a test box or frame to ensure that all four corners come together with no gaps. A miter-gauge extension that reaches past the blade, right, backs up the cut to prevent chip-out. For identical-length pieces, fasten a stopblock to the extension using double-faced tape.

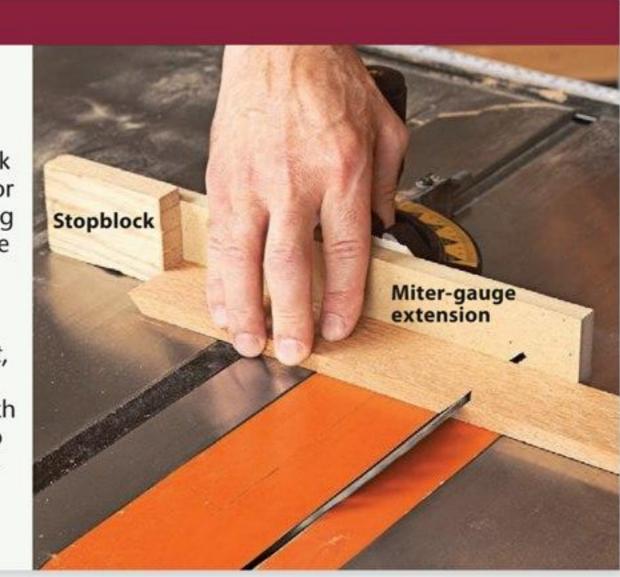


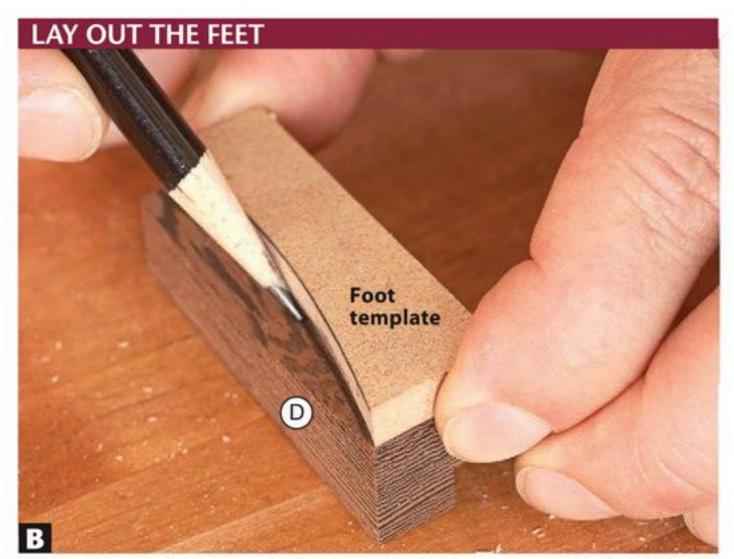

A template makes it easy to lay out identical curves on the feet (D). Align the bottom of the template with the end of the foot.

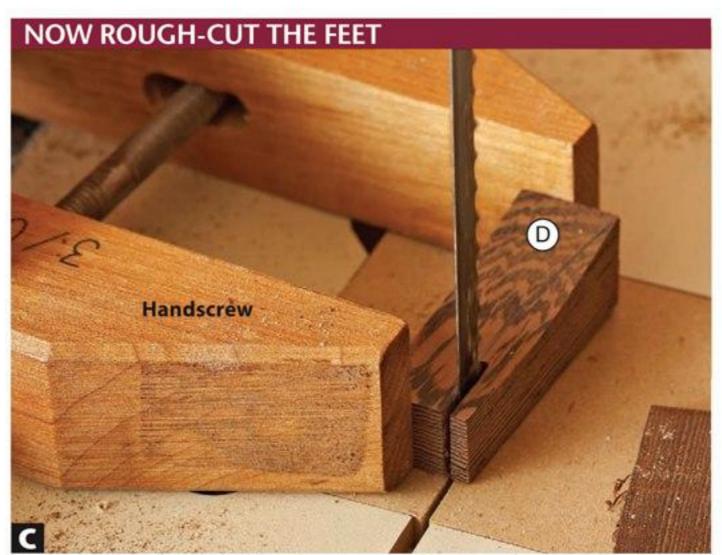

Safely grip each foot (D) in a handscrew. Bandsaw just outside the line; then lay out the curve on the adjacent face.

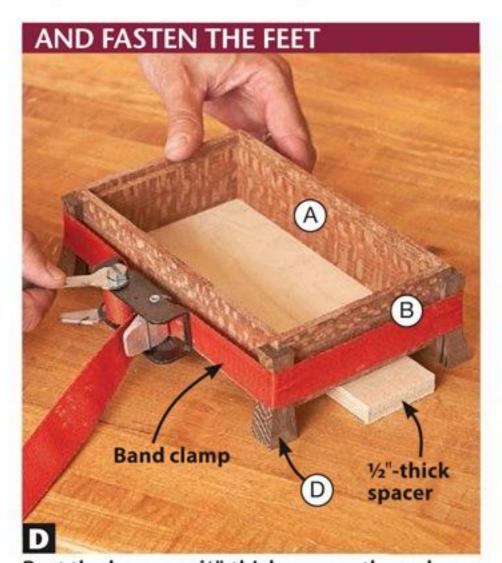

Rest the box on a ½"-thick spacer; then glue and band-clamp the feet (D) to the corners. Make sure each foot rests on the bench.

Platen

Veneer

Hold a plywood platen in place on each piece of veneer and, using a fresh blade, cut around the platen.

Waxed paper

Platen

F

White glue allows for a longer working time. Spread an even coat, then position the veneer flush with the platen edges.

template to transfer the foot shape to one unrabbeted face of each foot [**Photo B**]. Bandsaw this face to within ½6" of the line [**Photo C**], then lay out the profile on the adjacent unrabbeted face and cut it close to the line. With 220-grit sandpaper, finish-sand the feet to final shape; then assemble the box [**Photo D**].

Let's look at the lid

Cut a 4×7" blank for the lid panel (E) from 1/8" plywood [**Drawing 1**]. From 1/2" plywood, cut two 4×7" platens to use when gluing veneer to the lid panel. Using a platen as a template, cut the veneer to size [**Photo E**]. (We chose quilted maple.)

2Spread an even coat of white glue on one face of the lid blank [Photo F] and position it on a veneer sheet. Place the blank veneer side down on a waxed-paper-covered platen. Apply glue to the exposed lid face and position the second

piece of veneer. Clamp up the platens and lid [**Photo G**]. Allow the glue to dry at least four hours before removing the clamps and platens.


3 Trim the lid panel (E) to finished size [**Drawing 1**] and finish-sand it to 220 grit. Retrieve the blank for the lid ends (F) and lid sides (G) and rip it to ¾" wide. Cut a centered groove along one edge of the blank to match the thickness of the lid panel. Miter-cut the ends and sides from the blank to fit around the lid panel [**Photo H**].

Apply glue to the miters and the grooves in the lid ends (F) and sides (G) and assemble the lid with the panel (E). Clamp the corners with painter's tape. After the glue dries, sand the lid so it fits easily in the rabbet in the top of the box (A–D). **Quick Tip! Keep the lid uniform.** Sand equally on opposite sides so matching pieces stay the same width.


Handle this job easily

From wenge, cut a ¾×1×12" blank for the handle base (H). Cut a ¼"-wide groove ¼16" deep, centered on the blank's thickness [**Drawing 1**]. Make a copy of the **Handle Base Pattern** on *page 63* and spray-adhere it to the blank, aligning the bottom of the pattern with the ungrooved edge of the blank. Bandsaw ¼6" outside the lines and finish-sand up to the top line only.


2 Spray-adhere a copy of the Handle Pattern to a piece of ¼"-thick aluminum stock. Quick Tip! Wood is good, too. If you don't take a shine to metal, feel free to substitute lacewood or another species for the aluminum handle (I). Bandsaw just outside the pattern lines. Sand the top edge to 220 grit, then remove the pattern and sand the faces. We polished the aluminum starting with 150-grit sanding pads and finishing with 320 grit.

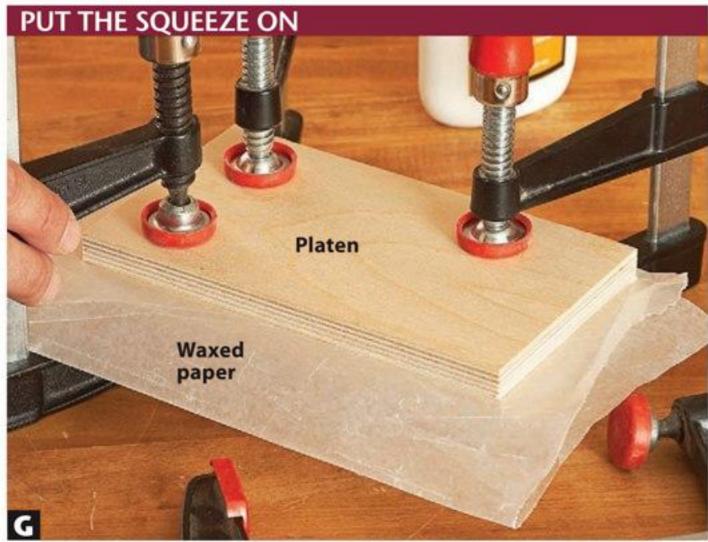


After gluing veneer on both faces, place waxed paper on top of the veneered panel, then clamp the top platen in place.

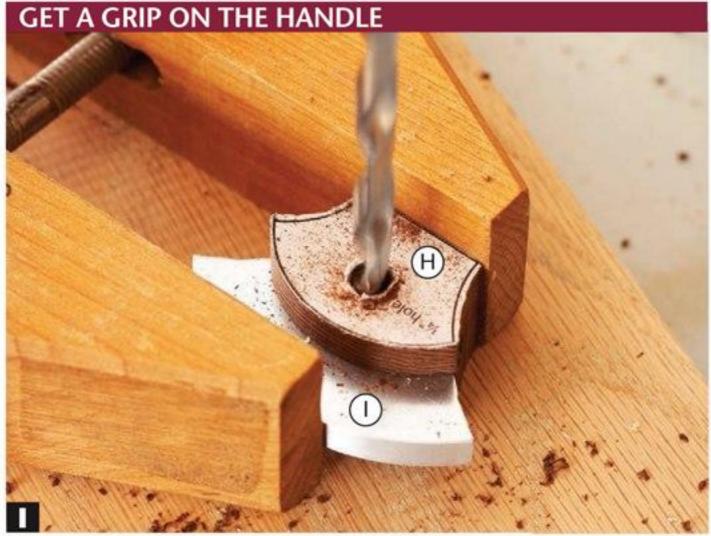

Clamp the handle base (H) and handle (I) in a handscrew. Mount a 1/4" twist bit in your drill press and bore through both pieces.

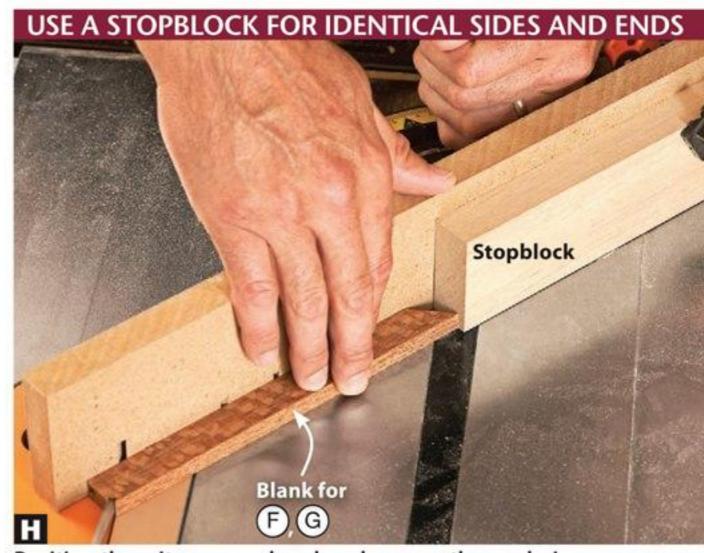

Position the miter-gauge head as shown so the workpiece presses against the stopblock throughout the cut.

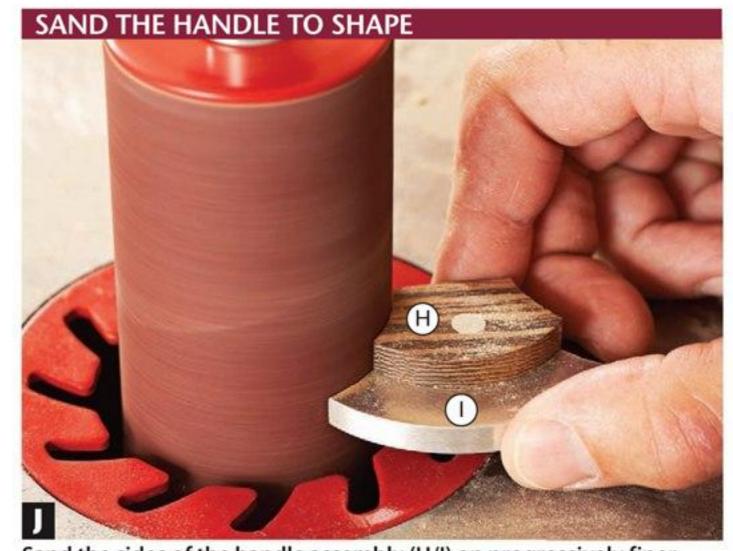

Sand the sides of the handle assembly (H/I) on progressively finer sanding drums to achieve the sheen you desire on the metal.

Tenter the handle (I) in the handle base (H), clamp the pieces in a handscrew [Photo I], and drill the hole where

indicated. Cut a length of aluminum rod to fit in the hole and secure it with a dab of epoxy if needed. Sand the rod flush with both faces of the handle base.

Using a 220-grit spindle sander or sanding drum mounted in your drill press, sand the handle assembly (H/I) until the aluminum is flush with the wood [Photo J]. Glue the handle base to the lid panel (E), centered.

Finishing touches

1 Apply a finish to the box and lid. To reach all the inside corners with even coverage, we sprayed on three coats of aerosol satin lacquer.

Cut a piece of adhesive-backed felt (available at hobby shops and fabric stores) to fit in the bottom. Test the fit before peeling off the backing and pressing it in place. 🧖

Produced by Craig Ruegsegger with Kevin Boyle Project design: Kevin Boyle Illustrations: Lorna Johnson

Materials List

		FI	NISHED	SIZE		
Part		T	W	L	Matl.	Qty
A*	sides	3/8"	2"	8"	L	2
B*	ends	3∕8"	2"	5"	L	2
C	bottom	1/8"	45%"	7%"	BP	1
D*	feet	3/4"	3/4"	21/4"	W	4
Lic	l					
E*	lid panel	1/8"	3%"	6%"	VP	1
F*	lid ends	¾"	3/4"	4%"	L	2
G*	lid sides	3∕8"	3/4"	7%"	L	2
H*	handle base	3/4"	15/16"	17/16"	W	1
1*	handle	1/4"	11/8"	21/4"	Α	1

^{*}Parts initially cut oversize. See the instructions.

Blade and bit: Dado blade; 1/4" drill bit.

Cutting Diagram Materials key: L-lacewood, BP-birch plywood, W-wenge, VP-veneered birch plywood, A-aluminum. G Supplies: Spray adhesive, 1/2" aluminum bar, E ¼"-diam. aluminum rod, quilted-maple veneer, 4¼×7¼" A B B self-adhesive felt.

34 x 51/2 x 36" Lacewood (1.5 bd. ft.) *Plane or resaw to the thickness listed in the Materials List. (D)

34 x 11/2 x 24" Wenge (.3 bd. ft.)


1/8 x 12 x 12" Birch plywood

0

Materials kit: Contains lumber, plywood, veneer, aluminum, and felt for one box, pieces cut slightly oversize. Kit no. W202, \$43.00, Heritage Building Specialties, 800-524-4184, heritagewood.com.

65

A

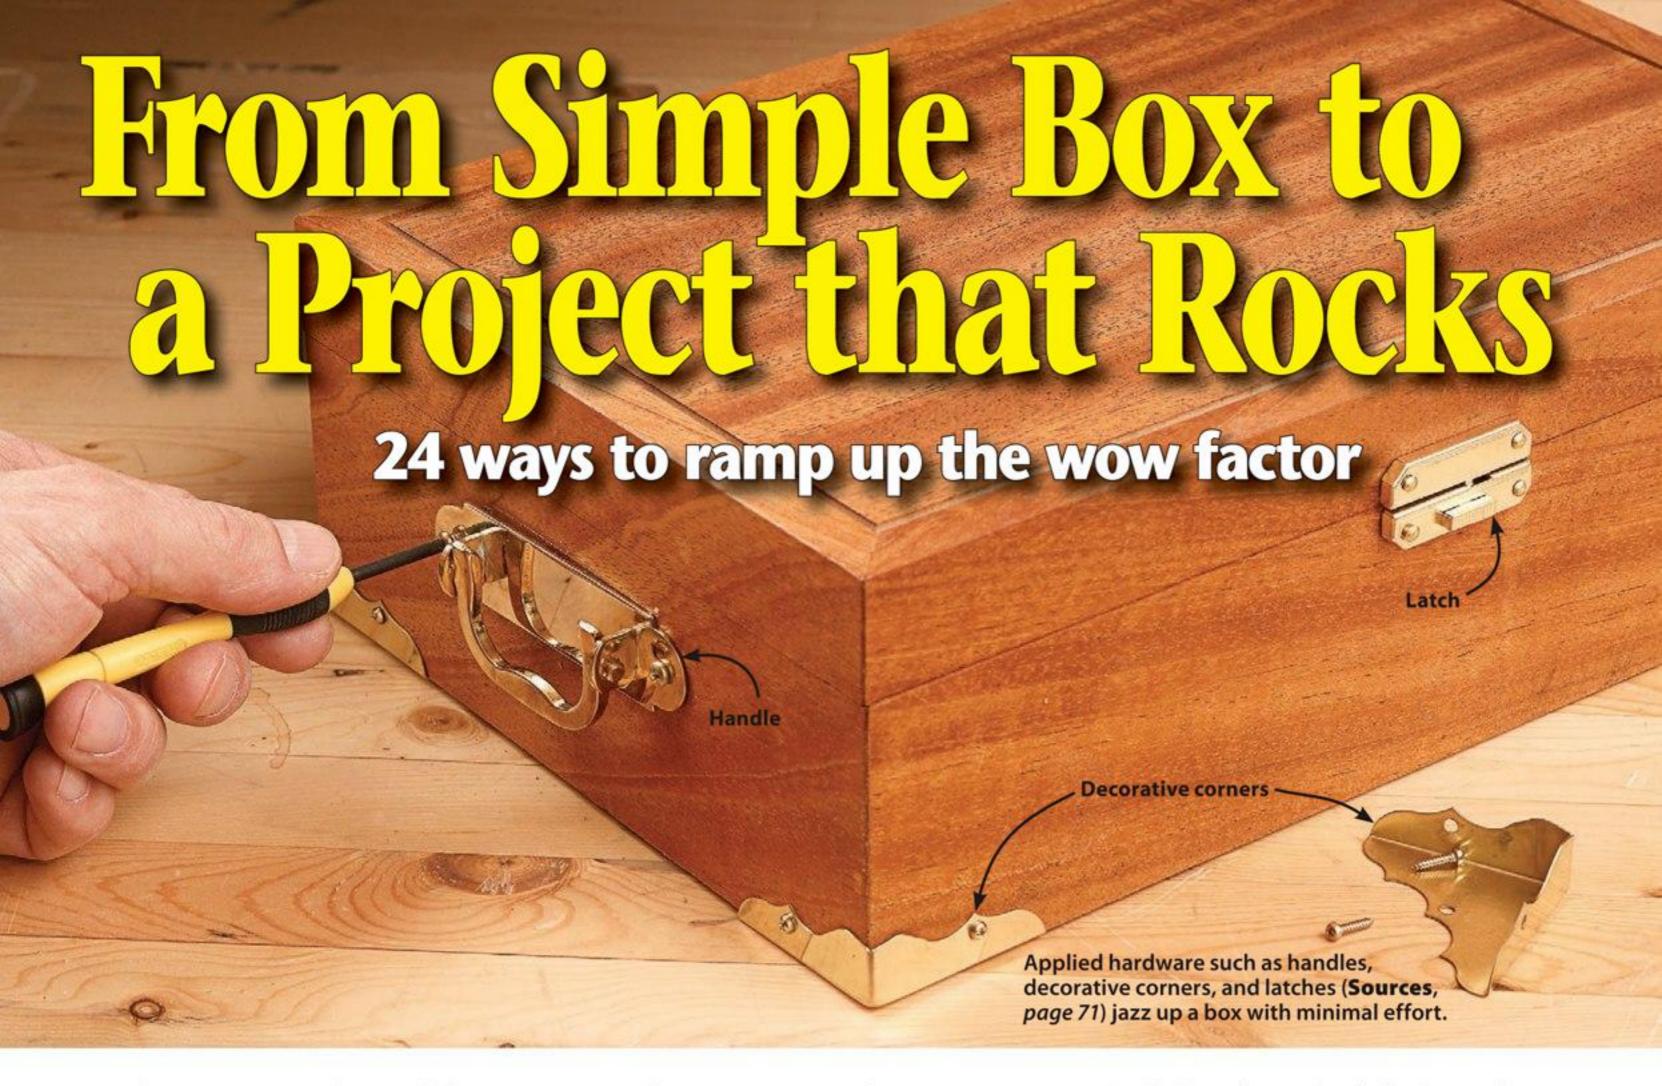

t's easy to see why small boxes are popular projects: They require little material and go together quickly, in even the smallest shop. Plus, you can

stretch your creativity by customizing them. On the next few pages, we offer tips on giving your boxes that extra personality to set them apart. Find plans for each of the boxes featured in this article along with many more gift boxes and jewelry chests at woodmagazine.com/cmbox.

Wow 'em with the wood


Start with striking stock

Making a box provides a great opportunity to use exotic stock without spending an arm and a leg. The smaller scale also allows for bold choices in contrasting spe-

cies and colors that might overwhelm a larger piece.

Although they're all built in the same way, each version of the keepsake box below makes a distinct impression on

the eye. To find interesting color and grain combinations, create samples of various species by finish-sanding, staining, and finishing scraps. Then mix and match to find pairings you like.

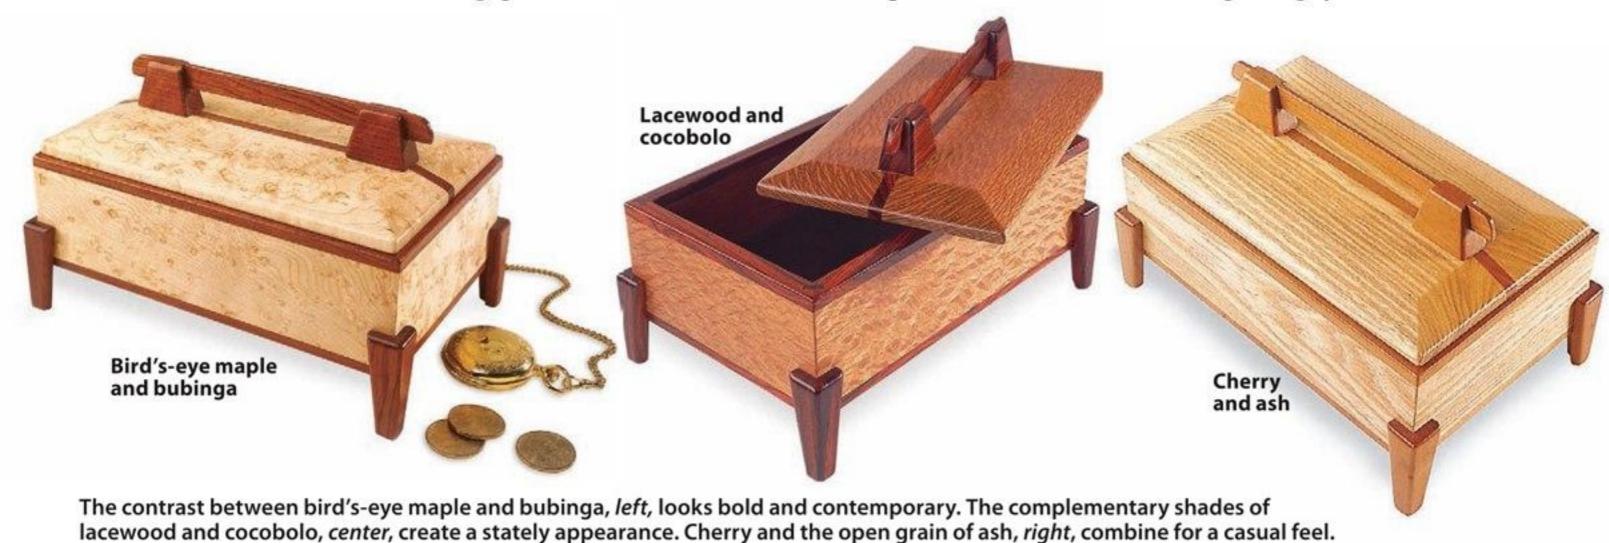


Make it shine with symmetry

Book-matching creates a striking lid panel by mirroring the grain pattern across a joint line, as shown at right. The steps below demonstrate how to create a veneered book-match, but you'll get similar results using resawn solid wood.

First, stack two consecutively cut sheets of veneer [Sources, page 71], aligning their grain patterns. Tape them together to keep them from shifting; then find and mark the joint line, below.

Place a metal straightedge along the mark and cut on the waste side with a fresh blade in a razor knife. To joint the just-cut edges, sandwich the veneer sheets between two pieces of MDF and sand them, below.


Remove the tape and open the veneer like the pages of a book. Align the grain pattern across the joint line and tape the pieces together, below right. Glue the veneer to the substrate using clamps and shop-made platens, as shown on page 65.

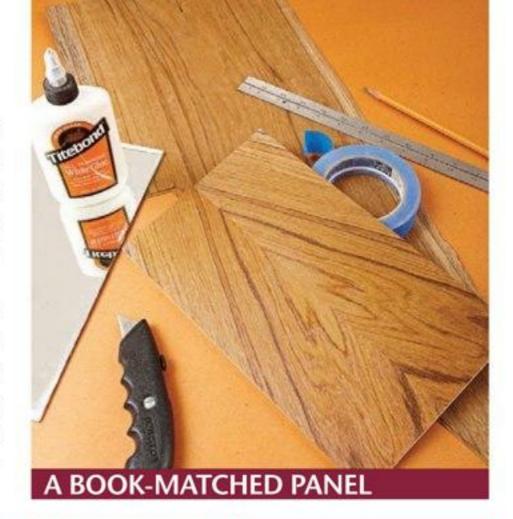




Painter's tape holds the joint together during glue-up. Clamp the substrate and veneer between ¾" MDF or plywood platens.

UNINTERRUPTED GRAIN FLOW

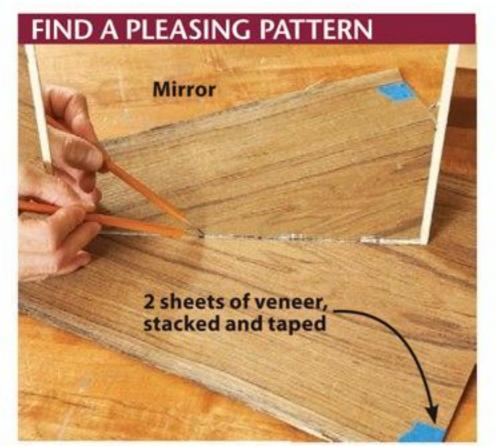

A mirror helps you visualize interesting bookmatches. Find an eye-catching pattern; then mark along the mirror with a pencil.

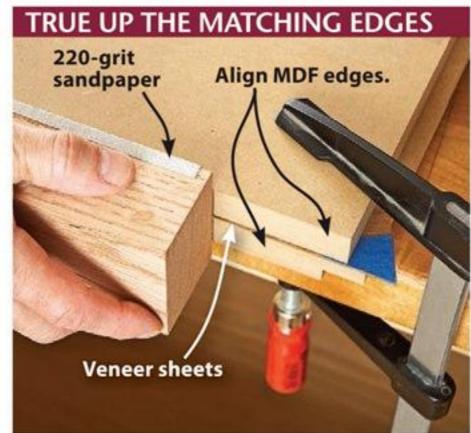

Align the edges of two MDF scraps with the cut edges of the veneer barely protruding. Sand the veneer flush with the MDF.

Wrap grain around corners

This technique makes the grain pattern continue around all four corners of a mitered box, as shown at right.

Start with stock that, when jointed and planed flat, is more than twice as thick as the finished thickness of the box sides. For example, for ½"-thick sides, use a piece of 11/4"-thick stock. Crosscut it 1/4" longer than the combined length of a box side and end [Drawing 1].

Lay out your box pieces on the edge of the board, as shown. Resaw the board

1 EDGE VIEW


woodmagazine.com

down its middle and joint the just-sawn faces flat. Plane the opposite faces to bring the boards to final thickness.

Next, bevel-cut each end of each board, removing as little length as possible [Drawing 1]. With a stopblock attached to a miter-gauge extension, bevel-cut the box ends (parts 1 and 3) to length [Drawing 2]. Then reset the stopblock to cut the sides (parts 2 and 4), again removing as little length as possible. Assemble the parts in numerical order, right.

1 2 (3)


67

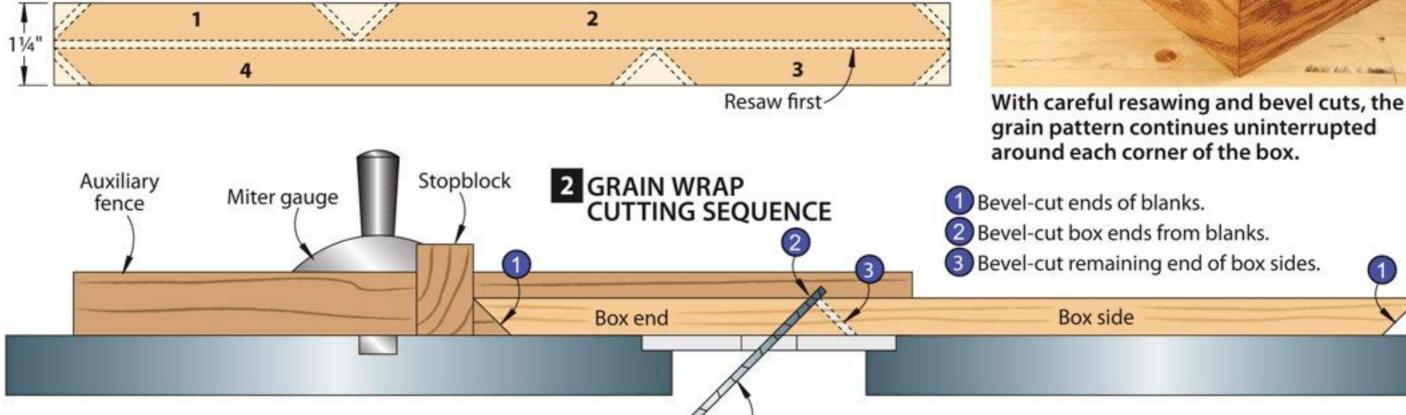


Blade tilted to 45°

Box side length + box end length + 1/4" -

Give it a raise

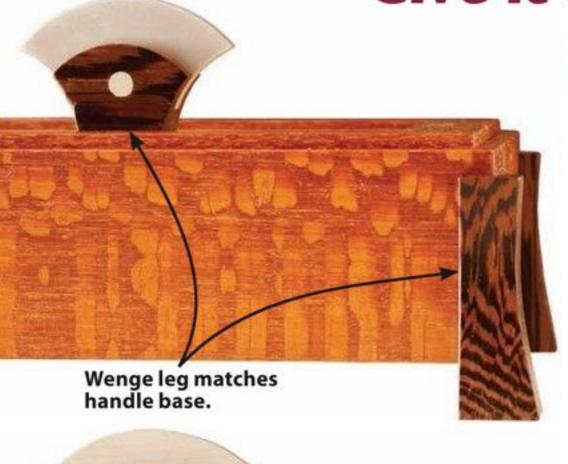

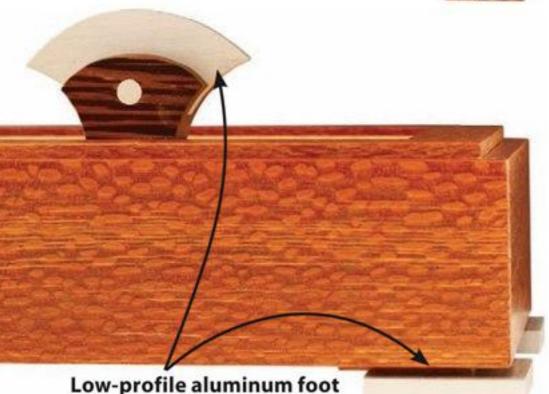


eparating a box slightly from the surface on which it sits gives the box a lighter appearance. Try these methods to add extra elevation.

Lift with your legs and feet

The small box on page 62 features svelte, curved legs at each corner, left, that match the wood in the handle and lift the box above the table. 11/2" squares of 1/4"-thick aluminum create a lower profile, lower left, and echo the aluminum used in the handle. (See Crank up some metal on the next page.)

Each leg of the small box, upper left, wraps around the corner. The rabbeted legs stop short of the top, creating a stairstep repeated by the raised lid. The box at upper right also uses a rabbeted leg, but here it runs the full height of the sides, hiding the end grain at the corner. This type of leg can hide an imperfect mitered corner joint, too.

The box at right appears to float just above the tabletop, thanks to small feet hidden in the recess created by the bottom [inset].

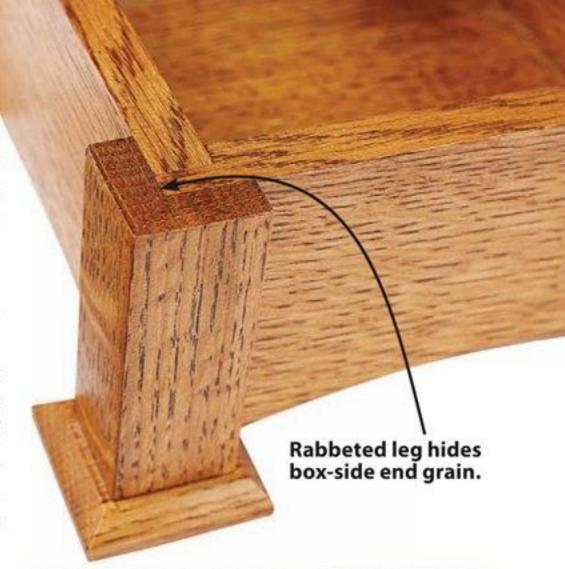



Set into each corner, the dark-colored feet match the lid and blend into the shadow created below the box.


Build a place-holding base


matches handle.


Add a base to an existing box to "hold" its place while the box moves elsewhere. For example, take a box of tea from the set below, and the base stays with its

to its proper place. To add this type of base easily, first build a frame to fit around the box [drawing]. Then build a second frame to fit inside the first. Glue the two together as shown to create a mates to remind you to return the box ledge to lift and support the box. Use the

same type of joinery as on the box, or choose a different joint to distinguish the two. With some imagination and a recessed box bottom, the extra space below an unattached base can become a secret compartment, below.

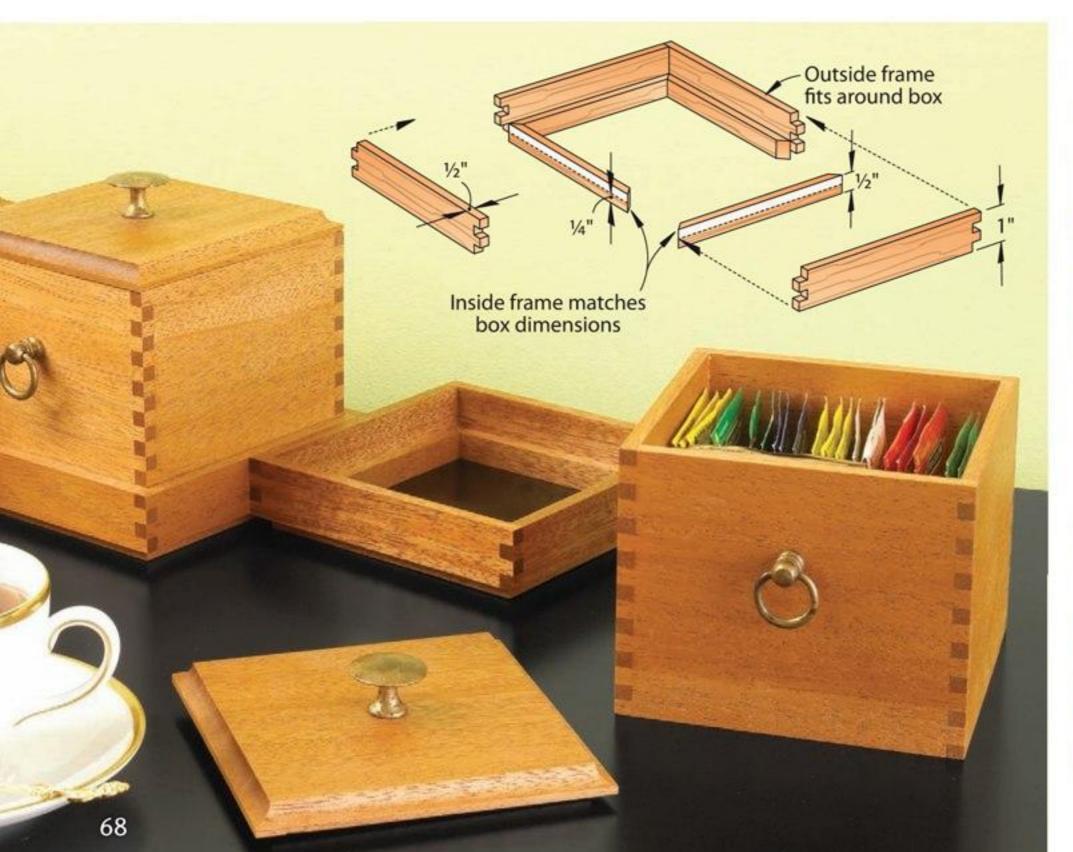

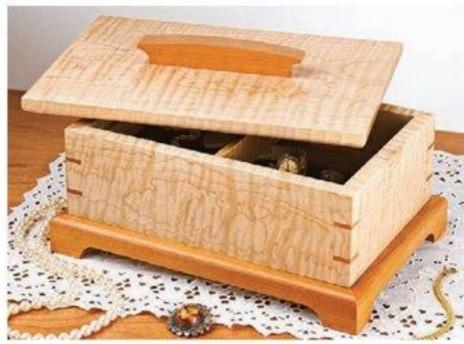

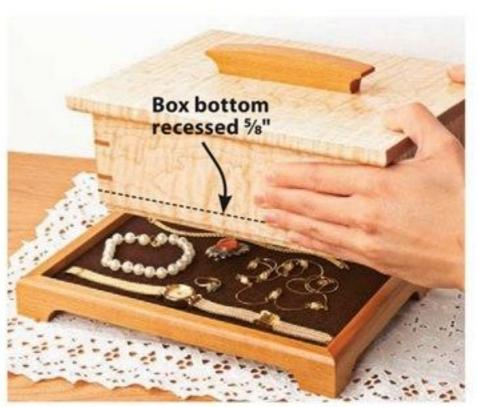

WOOD magazine December/January 2010/2011

Show off the joinery

Let very corner provides an opportunity to add striking details to a box. The alternating end grain and face grain of box joints, *far right*, create a symmetrical look. (See **More Resources** on *page 71* for details about cutting box joints.)

A rabbet joint like the one *below* has face grain glued to end grain, a bond that benefits from reinforcement. These rabbet joints were beefed up by drilling equally spaced ¹/₄" holes through the box ends and into the sides, and gluing in lengths of ¹/₄" dowel. Apply glue in the hole, not to the dowel, and twist the dowel as you insert it to spread the glue.


Miters hide end grain but also need reinforcement. Splines, below, far right, provide both strength and eye appeal. To add them, cradle the assembled box in a simple tablesaw sled, below middle and drawing, and cut slots in each cor-




After sanding the dowels flush with the end panel and applying a finish, the end-grain provides a subtle accent.

ner. Plane contrasting stock to fit the kerfs. Glue in oversize splines, then cut and sand them flush after the glue dries.

TABLESAW SPLINE SLED

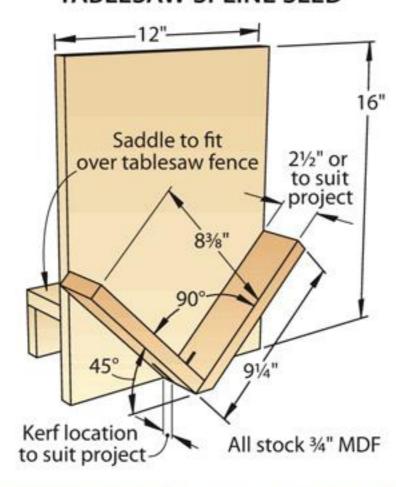

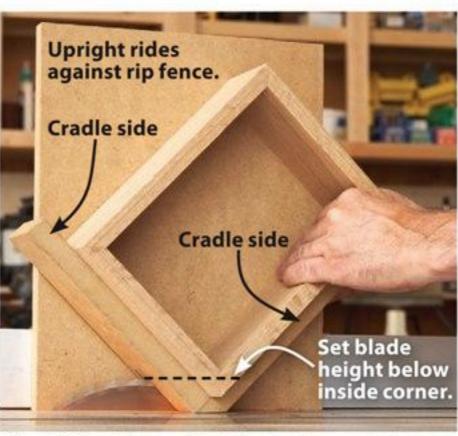

Glue 2½"-wide cradle sides to the upright at 45° to the saw tabletop and 90° to each other. Run the sled along the rip fence.






Crank up some metal

page 66, make projects literally sparkle. You can easily add shop-made metal accents like the aluminum handle and feet shown opposite page, top left using the woodworking tools you have now. They will cut and shape soft metals such as aluminum, brass, and thin copper. Find these materials at home centers.

To cut metals on the tablesaw, use a 60- or 80-tooth blade with a negative hook angle and triple-chip grind. Install a zero-clearance throat insert to help support the metal during the cut.

On the bandsaw, a ¼"- or ½"-wide, 6or 8-tooth-per-inch blade works well for cutting metal, *near right*.

To bring out the bling, far right, polish metal with increasingly finer grades of abrasive pads, sanding sponges, sandpa-

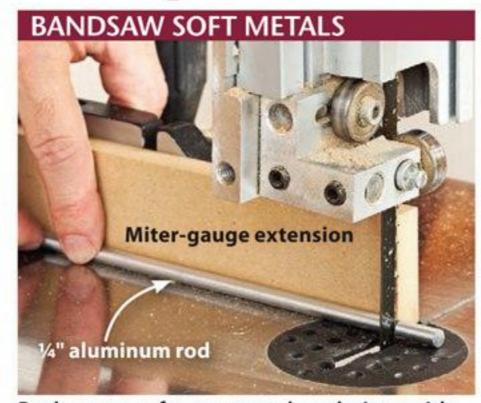

Back up a nonferrous metal workpiece with a miter-gauge extension. Feed the stock into the blade slowly.

per, and polishing compounds. Polish it enough, and aluminum will achieve a near mirrorlike shine.



Polish rods quickly by spinning them in a drill. Buff on tripoli compound with a soft rag. For flat aluminum, use a buffing wheel.

To fasten metals to your project, use epoxy. Woodworking glues won't bond to metal.


Flip your lid

or the simple act of opening a box lid, choose from dozens of options. These four easy-to-install hinges [Sources] work and look great.



Bore 5mm holes centered on the thickness of the edges of the lid and box. The chamfered edges serve as a stop to hold the lid at 90°, inset.

To drill the holes, mount a fence to your drill press and attach stopblocks on either side of the bit to align the box and lid holes. (Use a spacer against the bit to position each stopblock the same distance from the bit.) Rout the chamfers so one edge runs through the middle of the holes, *above*. After seating the hinges, close the lid to properly position them.

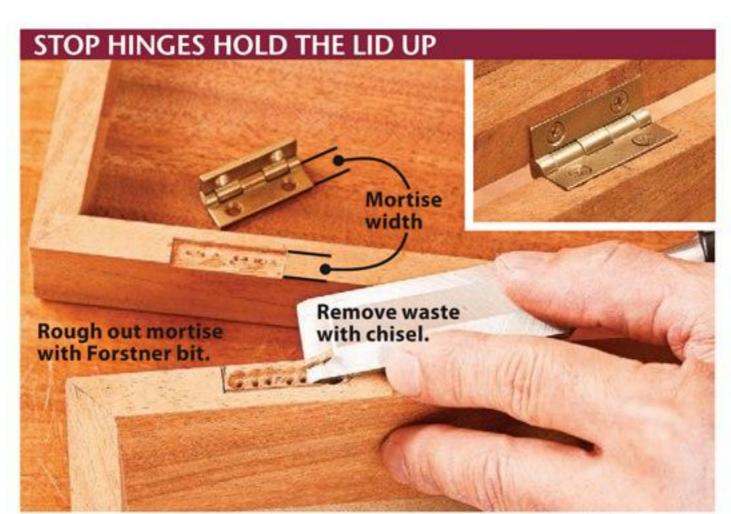

Size the mortise so the hinge pin extends past the rear of the box and lid. The hinges hold the lid open at 95°.


Lay out the hinge position on the lid and box. Then, using a Forstner bit, drill out most of the waste to match the thickness of a hinge leaf, *above*. Score along the layout lines with a chisel, then remove the remainder of the waste. For testing the fit, substitute steel screws for the brass ones provided with the hinges. Drive the brass screws only after you're satisfied with the fit and operation of the hinges.

Note: Before mounting pin or barrel hinges, cut a couple of test pieces the same thickness as your box stock. Test drill press and router setups on these parts before working on the box.



Bore 10mm holes centered on the thickness of the lid and box, then seat the hinges. Add a lid stay, top inset, to hold the lid open.

Barrel hinges hide out of sight under a closed lid. To mount them, set up a drill-press fence and stopblocks, as for the pin hinges. Lay out the hinge locations, *above*. The hinges press in place—no adhesive needed. Close the lid to orient the hinges, then open the lid and adjust the screw in each barrel to expand the barrel so it firmly grips the sides of the hole.

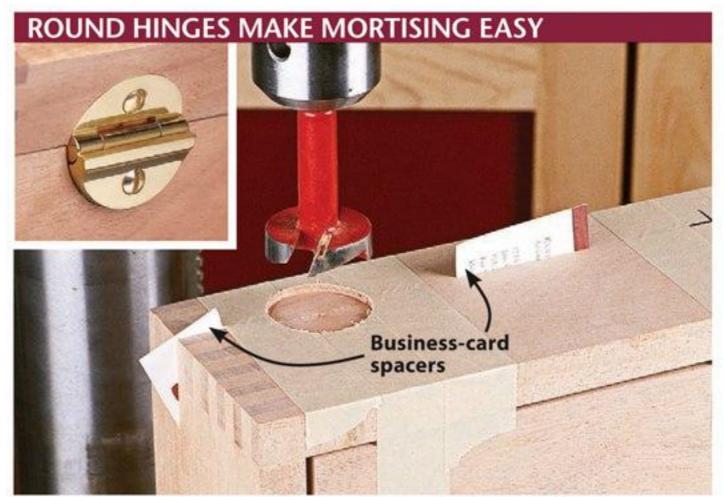

Use a 35mm Forstner bit to bore a shallow hole. Then simply screw the hinges in place. A stop on the hinges holds the lid open at 95°.

These hinges mount in a 35mm hole centered on the joint line between the lid and box, *above*. Tape the parts together with business cards pinched between them, then drill the holes to leave the hinge slightly proud of or flush with the surface. The stop mounts to the lower half of the hinge and supports the lid in an upright position—or leave it off so the lid opens 180° and rests against the back of the box.

Now think inside the box-


hese finishing touches provide surprising beauty and function under the lid.

Cross the great divide


Boxes beg to have things put into them. To keep those items organized, add a simple set of egg-crate dividers as shown near right.

To make your own, cut a kerf through a piece of scrap, and plane and sand the divider stock to fit the kerf. Next, crosscut the pieces to fit the interior length or width of the box, and rip them to allow clearance below the lid. Lay out the intersections of the dividers. Set your tablesaw blade height to half the width of the divider stock, *far right*. To create several identical pieces, fasten a stopblock to a miter-gauge extension.

Assemble the dividers by sliding the notches into each other.

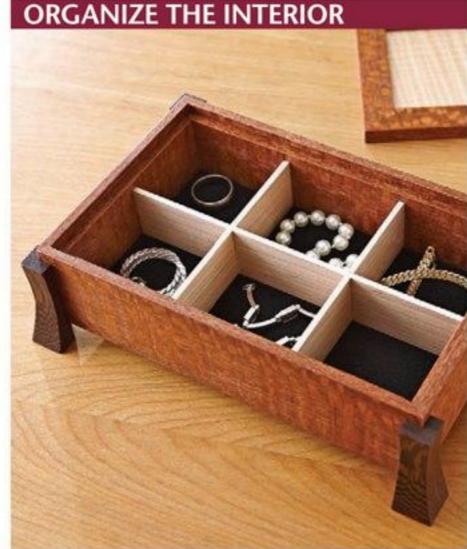

Make equal-size compartments as shown, or position the dividers to create a mix of large and small spaces.

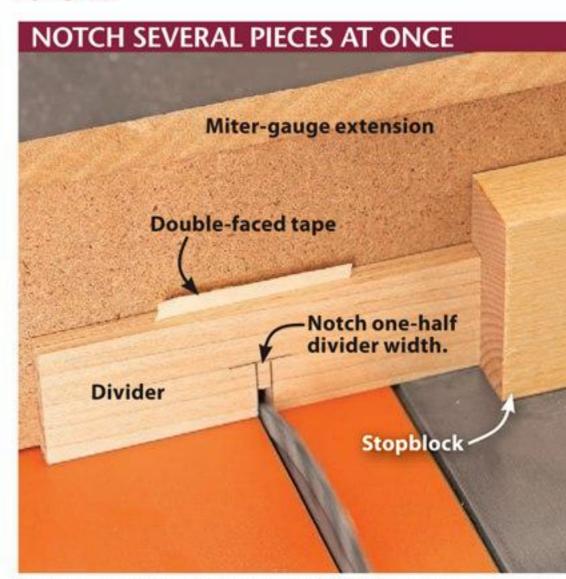


For 1¼"-wide dividers, set the blade %" above the table. Double-faced tape secures stacked workpieces to the extension and each other.

Everyone likes a soft touch

A layer of felt or fabric cushions delicate jewelry and adds a touch of elegance. Wrap the material around a cardboard or hardboard insert, as in the display table on *page 40*, or apply self-adhesive

felt directly to the bottom, as in the small box on page 62.

Flocking provides another option and creates a soft, seamless covering, even on vertical surfaces. Flocking consists of fine fibers, available in a variety of colors [**Sources**]. To use it, brush on the colored adhesive, *below left*, then load the cardboard-piston flocking tube with fibers. Pump the tube, *below right*, and the fibers whoosh out and stick to the adhesive. Shake out any loose fibers.

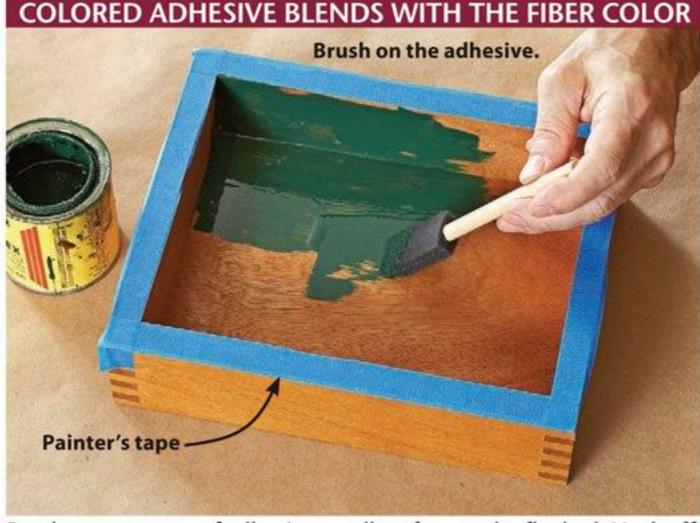

Brush an even coat of adhesive on all surfaces to be flocked. Mask off adjacent areas with painter's tape.



A cardboard box contains drifting flocking. Apply the fibers generously. After the adhesive dries, collect excess fibers for reuse.

MORE RESOURCES

FREE VIDEOS

- Watch how to set up your tablesaw to cut perfect miters and bevels at woodmagazine.com/tsaccuracy.
- See how to make and use a simple boxjoint jig at woodmagazine.com/boxjointvid.

FREE PLAN

■ Print off a free plan to construct a miterspline jig at woodmagazine.com/splinejig.

RELATED PLAN

- Build a simple box-joint jig with the plan at woodmagazine.com/ezboxjointjig. \$
- 5 Download this article for a small fee.

Produced by Craig Ruegsegger with Kevin Boyle Illustrations: Roxanne LeMoine; Lorna Johnson

Sources

Veneer: B&B Rare Woods, 303-986-2585, wood-veneers.com.

Hinges: Pin hinge no. 00D81.50, Lee Valley, 800-871-8158, leevalley.com; non-mortise barrel hinge no. 27C11, 35mm round stop hinge no. 129713, Woodcraft, 800-225-1153, woodcraft.com; 2" inside-stop piano hinge no. L3247, Craft Inc. 800-827-2388, craft-inc.com.

Flocking: Suede-Tex adhesives and flocking fibers, Woodcraft.

Surface-applied hardware: Decorative corners no. 149756, Woodcraft; jewelry box handle no. 27742, jewelry box snap catch no. 22310, Rockler, 800-279-4441, rockler.com.

woodmagazine.com 71



Glue up perfect box joints with these handy cauls

Box joints have been a staple of woodworking for centuries, but the slightly proud fingers (which will be sanded flush later) prevent you from applying the necessary clamping force where you need it most—directly at the joint. Rockler's Box-Joint Clamping Cauls deliver the solution with corner blocks that have matching fingers. Simply clamp one caul on each corner with a band clamp or two for perfect glue-ups. The cauls come in 4-packs for ¼", ¾", and ½" fingers.

Rockler Box-Joint Clamping Cauls, \$10 per 4-pack. 800-279-4441, rockler.com








Beefy drill press solves common problems

Delta's new 18" drill press delivers solutions to two common complaints: difficult-to-set drivebelt tension and inadequate quill stroke. Instead of wrenching on the motor every time you change speeds, a quick-release idler roller on the 18-900L retracts without tools for quick belt changes among its 16 speeds, and when reengaged maintains the right level of belt tension. This machine also features an industry-leading 6" quill stroke with just one rotation of the handle. Its large table tilts 90° side-to-side and 45° forward. Cross-hair lasers and an LED task light illuminate the work area.

Delta 18" Drill Press, #18-900L, \$829 800-223-7278, deltaportercable.com

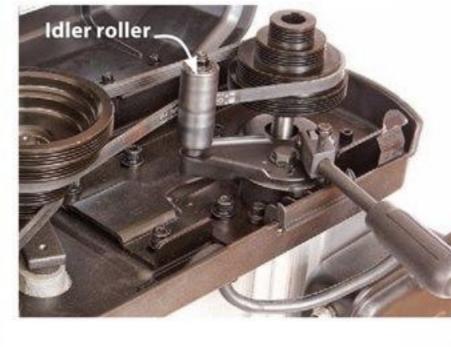



Compact router kit gives you lightweight options

We savor small routers—call 'em trim routers or compact routers; we don't care—for light-duty jobs where even a midsize 2-hp router proves cumbersome. So we love the flexibility DeWalt's DW611PK two-base kit provides. You can swap the 1¼-hp variable-speed motor between the fixed and plunge bases quickly to fit the task at hand. Weighing just under 6 pounds in its plunge base, this lightweight router works great for sign-making and routing inlays, stopped flutes, and hinge mortises. It uses only a ¼" collet, limiting you to ¼"-shank bits. It includes an edge guide for the plunge base. (Porter-Cable will offer a similar kit with a single-speed motor for \$189.)

DeWalt

Two-Base Compact Router Kit, #DW611PK, \$199 800-433-9258, dewalt.com

woodmagazine.com





Portable cyclone adjusts airflow automatically

Add this to the "Why didn't I think of that?" category. Oneida's Smart Dust Collector works, essentially, as a variable speed cyclone collector. It measures the amount of resistance (static pressure) in the ductwork, and then adjusts the impeller speed automatically to generate the maximum amount of suction. This allows it to work effectively on 2½" flexhose and 6" smooth-wall duct. It has a remote-control power switch, 6" inlet, HEPA filter with flame-guard protection, and an infrared sensor to alert you when the 35-gallon steel collection drum needs emptying.

Oneida Air Systems Smart Dust Collector, 2-hp #XXS020100, \$1,987; 3-hp #XXS030100, \$2,360 800-732-4065, oneida-air.com





Sharpen those spade bits rather than toss them

Most people use spade-type drill bits until they're dull or rusty, then toss them aside. Now you can sharpen dull spade bits, from ¼" to 1½" wide, on the Drill Doctor DDSB. To sharpen a spade bit, slip it into the holder, turn the power on, and press the gray housing down to engage the grinding wheel. Then use the finger lever to slide the wheel back and forth along the bit's flute. (The tapered wheel matches the angles for rim spurs.) Like predecessor Drill Doctor models, this unit also sharpens standard twist bits from 3/32" to 1/2".

Drill Doctor Drill Doctor DDSB, \$99 800-597-6170, drilldoctor.com




Power

Electric router lift makes precise adjustments

The MLCS PowerLift's DC motor moves your mounted router up or down through a 4½" range, giving you full access to the collet nut and spindle to change bits above the table. Premounted to a ¼"-thick aluminum insert, this lift features digital readout depth adjustments accurate to .001". And you can vary the adjustment speed by hand on the control panel, or with a foot pedal.

Slow it down to make fine adjustments, then speed it up to raise the bit for above-the-table changes. The PowerLift comes ready to fit a 3½"-diameter router motor, which includes most midsize 1½- to 2¼-hp routers.

MLCS Woodworking PowerLift Router Lift, #9450, \$390 800-533-9298, mlcswoodworking.com

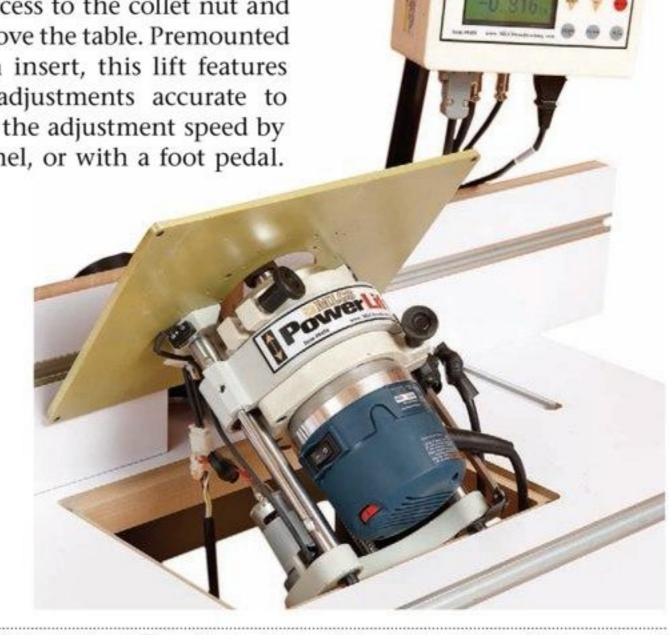

Auto-adjust jig makes quick work of pocket holes

Just when you thought there was nothing left to invent in pocket-hole joinery, the folks at Porter-Cable come out with this beefy jig. The mostly-metal QuikJig differs from other pocket-hole jigs in that you set the bit's drilling depth once and never change it. The drilling guide snugs up against your workpiece, automatically adjusting for thicknesses from %" to 1½". When you drill, the bit's stop collar hits the top of the guides to give you the perfect depth. And for long workpieces, simply rotate the jig 90°, remove the chipcollection tray, and feed stock horizontally.

Porter-Cable QuikJig Pocket-Hole Joinery System, #560, \$229 888-848-5175, deltaportercable.com



HARBOR FREIGHT TOOLS

Quality Tools at Ridiculously Low Prices

does Harbor Freight Tools sell high quality tools at such ridiculously low prices? We buy direct from the factories who also supply the major brands and sell direct to you. It's just that simple! Come see for yourself at one of our 330 STORES NATIONWIDE and use this 20% OFF Coupon on any of our 7,000 products. We stock Automotive products, Shop Equipment, Hand Tools, Tarps, Compressors, Air & Power Tools, Material Handling, Woodworking Tools, Welders, Tool Boxes, Outdoor Equipment, Generators, and much more.

NOBODY BEATS OUR QUALITY, SERVICE AND PRICE!

We Have 10 Million Satisfied Customers

We Buy Factory Direct and Pass the SAVINGS on to YOU!



- **Shop & Compare Our Quality Brands Against Other National Brands**
- Thousands of People Switch to Harbor Freight Tools Every Day!
- √ NO HASSLE RETURN POLICY
 √ Family Owned & Operated

We Will Beat Any Competitor's Price Within 1 Year Of Purchase!

330 STORES NATIONWIDE Store Locator: 1-800-657-8001

Plans. Coupon cannot be bought, sold, or transferred. Original coupon must be presented in store in order

Shop Online at HarborFreight.com



Get More Coupons at HarborFreight.com/Wood



This valuable coupon is good anywhere you shop Harbor Freight Tools (retail stores, online, or catalog). Coupon

not valid on prior purchases. Coupon cannot be bought, sold, or transferred. Original coupon must be presented

in store, with your catalog order form or entered online in order to receive the offer. Valid through 3/23/11.





This valuable coupon is good anywhere you shop Harbor Freight Tools (retail stores, online, or catalog). Coupon not valid on prior purchases. Coupon cannot be bought, sold, or transferred. Original coupon must be presented in store, with your catalog order form or entered online in order to receive the offer. Valid through 3/23/11.





not valid on prior purchases. Coupon cannot be bought, sold, or transferred. Original coupon must be presented

in store, with your catalog order form or entered online in order to receive the offer. Valid through 3/23/11. in store, with your catalog order form or entered online in order to receive the offer. Valid through 3/23/11.

REG. PRICE

\$29.99

not valid on prior purchases. Coupon cannot be bought, sold, or transferred. Original coupon must be presented

Includes two

1.5V button cell batteries.

Ask WOOD

Answers to your questions from letters, e-mails, and WOOD Online®

HAVE A QUESTION?

For an answer to your woodworking question, write to **ASK WOOD, 1716 Locust St., LS-221, Des Moines, IA 50309-3023** or e-mail us at **askwood@woodmagazine.com**. For immediate feedback from your fellow woodworkers, post your questions on one of our woodworking forums at **woodmagazine.com/forums**.


Secondhand liability

After reading about the tablesaw lawsuit in issue 199 (September 2010), I began to worry about the pending sale of my old tablesaw and jointer. If I sell them and the buyer hurts himself, am I liable? Would it be less trouble to just haul them to the scrapyard?

-John Durda, Oxnard, Calif.

Don't toss those tools just yet,
John. We posed your legal
stumper to Keith Miller, professor of
Law at Drake University Law School in
Des Moines, Iowa. According to Keith,
the court systems don't attach the same
strict liability to "casual sellers" that
they do to manufacturers, wholesalers,
and retailers.

Unless you earn a significant part of your income dealing in used machinery, you fall into the "casual seller" category. For the most part, the courts have protected these individuals as long as an "as is, where is" understanding is in place—meaning the tool is sold in its present condition at the current location with no warranty implied. The "as is, where is" nature of secondhand tools is generally implied from casual sellers. But if it makes you feel safer, Keith suggests explicitly advertising them as such.

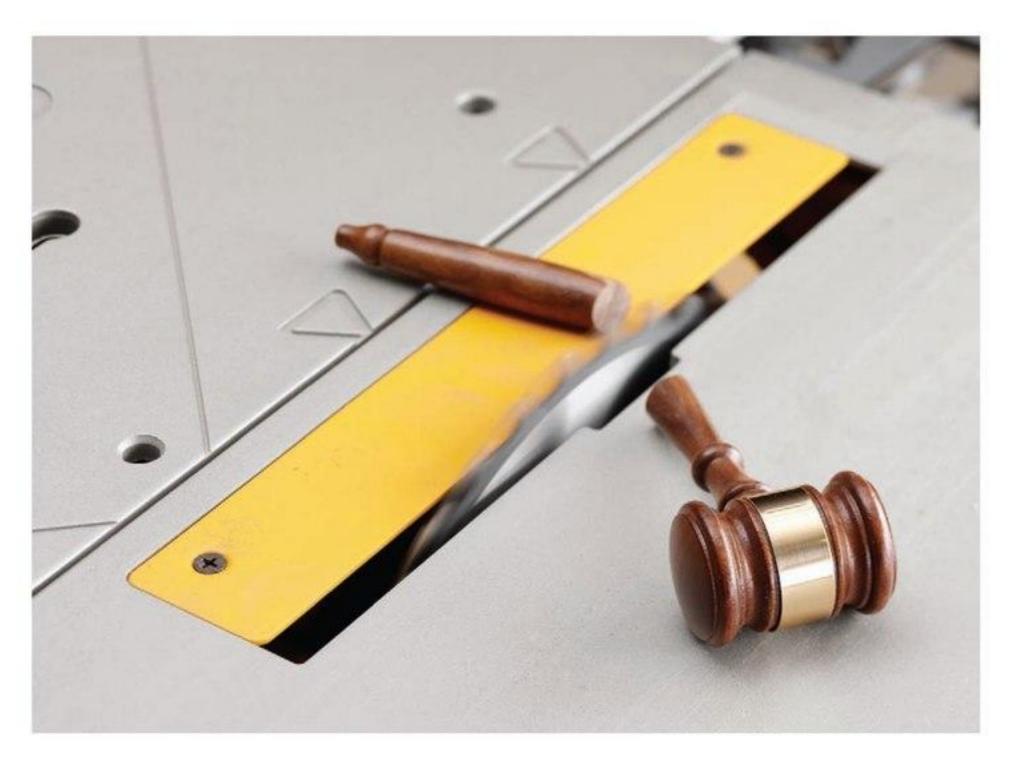

Now, some commonsense caveats: First, do your best to search out and include all the safety equipment that originally came with the tool. If you no longer have it, make sure the buyer knows this is part of the "as-is" condition of the tool. Or better yet, contact the manufacturer to purchase replacements (or for suggestions for suitable aftermarket versions). You could even

use these new parts as a selling point! Second, if you've altered the tool significantly, especially in a way to make it more dangerous, a court of law could rule against you if the plaintiff proves that there was malice or negligence on your part.

Editor's note: To read our coverage of the Osario v One World Technologies, Inc. lawsuit, visit woodmagazine.com/tstrial


Lighten up end grain


After staining an oak tabletop, the end grain on the table's edge came out noticeably darker than the top. What could I have done differently to make it blend better?

—Tony Toto, Hanover, Mass.

End grain can be tricky, Tony, especially in porous woods such as oak. The open ends of the grain soak up more stain pigment than the less-porous faces and edges. Sanding closes up some of those open cells, slowing the intake of the stain. The finer the grit, the less pigment will stick. For porous woods, as a rule of thumb, double the grit for end grain. So, if you sand through 220 grit for the faces and edges, sand the end grain up to about 400.

Sanding to twice the grit on the end grain eliminates the noticeable dark line left by the stain's pigments.

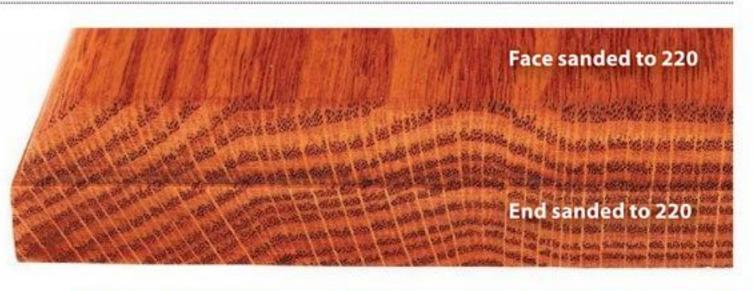

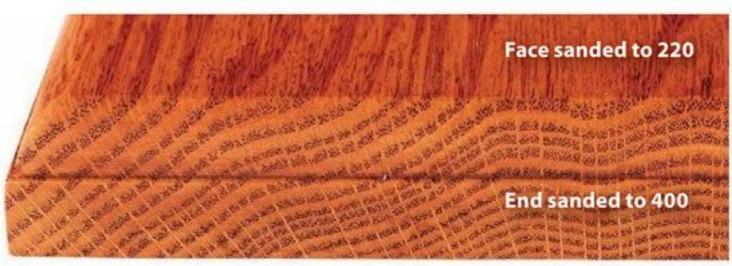

continued on page 78

A BIG ASS FAN FOR MY SHOP?




ABSOLUTELY!

You've got this great shop with high ceilings. It's too hot in the summer and too cold in the winter. The solution is the all new ShopFan[™] from Big Ass Fans®, engineered with our patented airfoil technology to improve conditions in workshops up to 5000 square feet.

The monthly operating cost of a ShopFan is less than 50 cents per day...yet it does the work of more than twenty standard ceiling fans. It's an investment that will pay dividends for a lifetime.

QUIRKY NAME. SERIOUS FANS.

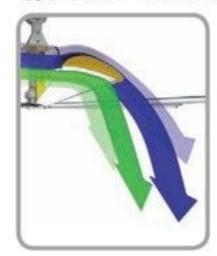

For over a decade, Big Ass Fans has been engineering large, high-performance ceiling fans for tens of thousands of satisfied industrial customers worldwide. Like all of our fans, ShopFan is engineered, precision balanced and hand built with aircraft-grade aluminum and industrial components right here in Lexington, Kentucky. You can have this fan up and running in a couple of hours. And best of all, it's a genuine Big Ass Fan.

TRY A SHOPFAN IN YOUR SHOP FOR 30 DAYS CONTACT US FOR DETAILS 877-326-0599 WWW.BIGASSFANS.COM

High Volume/Low Speed air movement technology

Industrial ceiling fan quality

Easy Installation

- Weighs less than 145 lbs
- Pre-wired for 115V 20A operation
- Includes 50-ft motor cord

Keeps Things Cool

- Improves workplace comfort
- Increases productivity and accuracy

Sized for Small Shops

- Air circulation for spaces up to 70 ft x 70 ft
- For ceilings as low as 14 ft
- 14-ft diameter fan

Full-featured Controls

- Fully adjustable speed settings
- Compact control unit is pre-wired

Year-round Energy Savings

- Low energy air circulation
- Provides cooling breezes in summer
- Heater runs less frequently by redistributing rising heat back down to floor level

Optional mounting bracket and 1 ft extension tube shown in photo.

RBIGASS FANS No Equal.

An ISO 9001:2008 certified company.

Covered by one or more of the following U.S. Patents: 6,244,821; 6,589,016; 6,817,835; 6,939,108; 7,252,478; 7,284,960; 7,654,798; D587,799; D607,988 and other patents pending.

©2010 Delta T Corporation dba The Big Ass Fans Company. All rights reserved.




QUALITY CARBIDE ROUTER BITS, SHAPER CUTTERS & MUCH MORE!



Woodline USA is the official manufacturer of Maloof router bits!



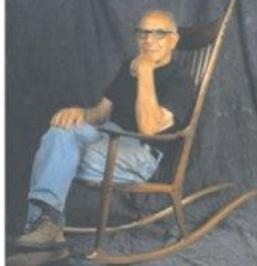


These bits feature a unique tapered rabbet with tapered bearings developed specifically for Sam Maloof to make the fabulous joints of the Maloof chair. All have a 1" diameter and 5/8" cutting depth.

PART#	SLOPE	PRICE
WL-6220	5° 2 pc Set	\$75.00
WL-6221	3° 2 pc Set	75.00
WL-6220	0° Single Bit	35.00





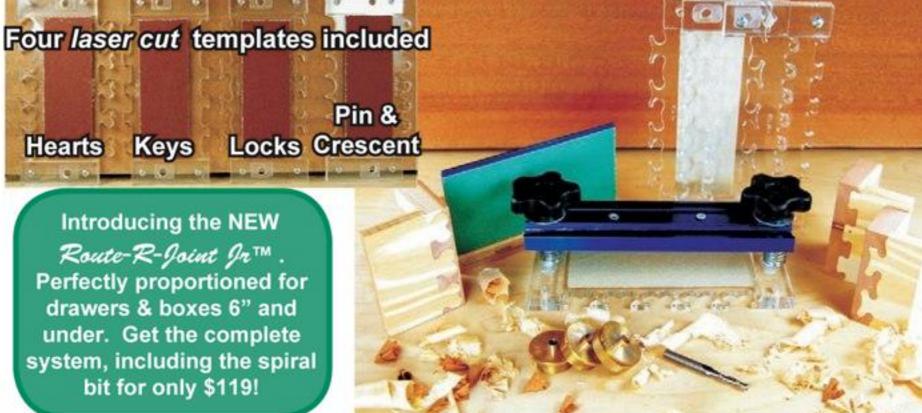

EASY ORDERING! 24 HOURS A DAY, 7 DAYS A WEEK 1-800-472-6950

Request a full catalog or order online at www.woodline.com

Ask WOOD

Bugged by beetles

Some insect has infested my stack of drying cherry and red oak lumber. The oak, especially, has thousands of tiny holes with powder under each hole. It doesn't look like termites. Can you tell me what it is and how to get rid of it?

-Charles Edgington, Orlando, Fla.

 Sounds like powderpost beetles, Charles. Once your hardwood is infested, these little guys hatch, munch their way through the wood, and pop out, leaving tiny exit holes and signature piles of floury sawdust.

There are two common types of powderpost beetle: anobiid and lyctid. If the holes are about 1/8" in diameter, it's probably the anobiid.

The anobiid really only likes wet wood. Once it dries below about 20 percent moisture content, the beetles lose interest and the problem takes care of itself. A borate-based treatment, such as Bora-Care (Nisus Corporation, nisuscorp.com 800-264-0870), will slow the pests down, but you'll have to give the wood a thorough wetting with the treatment.

If the holes are about 1/32" to 1/16", you likely have the lyctid variety. These will continue to eat dried hardwoods.

Heat kills both types of beetles and their eggs. 130° for about 24 hours does the trick, making kiln drying an effective way to eliminate infestations. But be sure the kiln owner knows that you're handing over infested wood. He may not want to risk contaminating his operation.

In the meantime, quarantine the infected lumber from other wood (including your home and buildings). Powderpost beetles won't go after softwoods, such as the framing in most homes, but could spread to trim, cabinets, furniture, etc. 🧖




Ask WOOD

Birdhouse basics

Our lake association plans to build several bluebird houses. How big should I make the entrance, and how high off the floor of the birdhouse should it be located?

—Dick Webber, East Jordan, Mich.

The U.S. Fish and Wildlife
Service recommends making

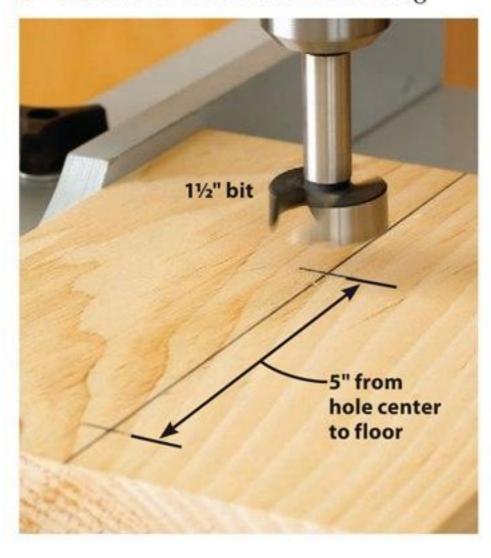

bluebird houses 5" square and 9" high on the inside, with a 1½" hole 5" above the floor. Leave the birdhouses unfinished both inside and out, and mount them 4–8' above the ground. If your group plans to follow up by helping house other bird species, refer to the chart below to guide your designs.


BIRDHOUSE CONSTRUCTION AND MOUNTING GUIDELINES					
Bird	Width/depth, height	Entry- hole size	Hole height above floor	Mounting height	
Carolina wren	4", 8"	11/8"	1–6"	6–10'	
Chickadee	4", 8–10"	11/8"	6-8"	4–15'	
Flycatcher	6", 8–12"	11/2"	6–10"	5–15'	
House finch	6", 6"	2"	4"	8–12'	
Nuthatch	4", 8–10"	13/8"	6-8"	5–15'	
Red-headed woodpecker	6", 15"	2"	10"	20-40'*	
Titmouse	4", 10–12"	11/4"	6–10"	5–15'	
Swallow	5", 6-8"	11/2"	4–6"	5–15'	
Warbler	4", 8"	11/4"	6"	2–12'**	

*Outer surfaces should be bark. Before mounting, pack the inside with sawdust that the woodpecker will remove. **Mount house beside or over water.

woodmagazine.com 79

We asked. You answered.

We surveyed woodworkers of all skill levels and technical proficiency and asked what you wanted in a small-format CNC machine. We took your suggestions back to our development shop and got to work. One year later, we're proud to introduce the ShopBot

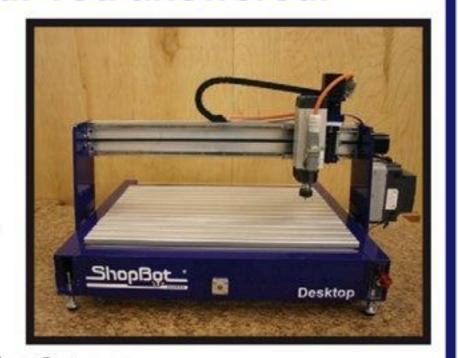

Desktop - the smallest ShopBot ever.


As well as having impressive woodworking capabilities, the Desktop has engraving-level precision and the power and rigidity to machine parts from plastic, aluminum and other materials. It's capable of a wide range of workbench and prototyping projects.

The Desktop runs ShopBot software and ships with the PartWorks design suite, so it's fully compatible with other ShopBots and all ShopBot resources. And, like every ShopBot, it's made in the USA.

It's small, but the ShopBot Desktop is a lot more than just a starter CNC. It's a powerful, affordable, small-footprint prototyping and production center ready to go to work in your home or shop.



888-680-4466 shopbottools.com twitter.com/shopbot

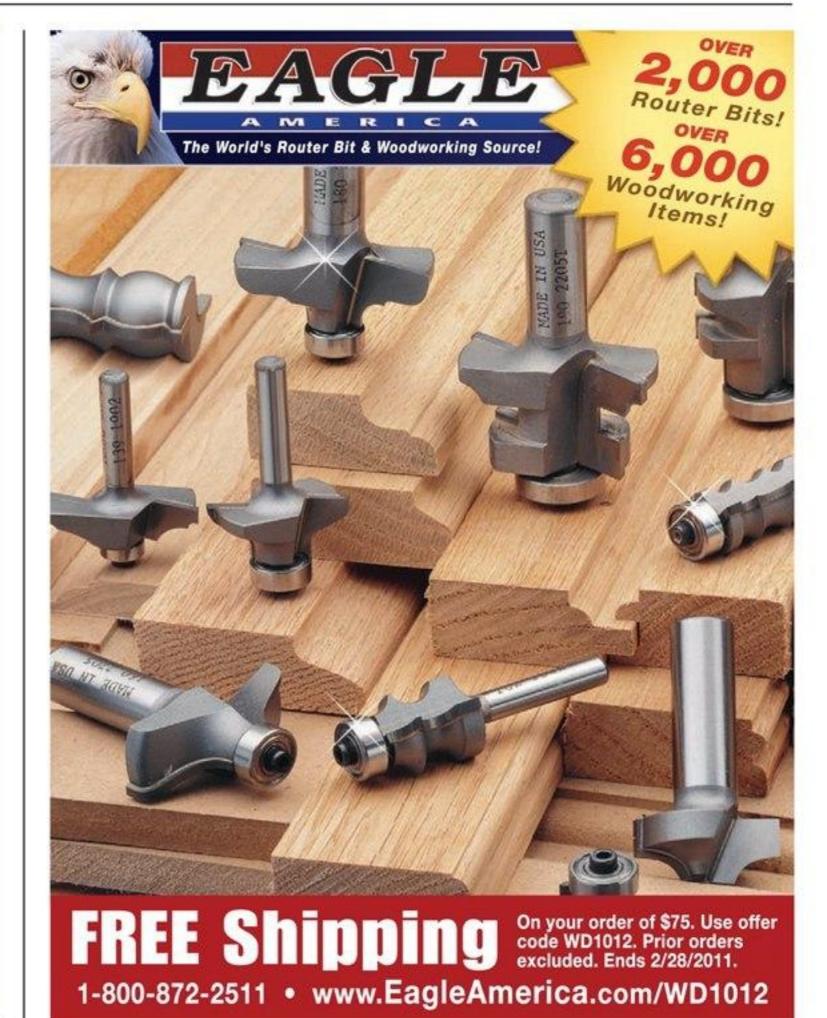

Shop-Proven Products

These woodworking wares passed our shop trials

About our product tests

We test hundreds of tools and accessories, but only those that earn at least three stars for performance make the final cut and appear in this section. Prices are current at the time of article production and do not include shipping, where applicable.

Beefy trim router proves more than capable

From the moment I picked up Ridgid's R2401 trim router I was impressed. The overmolded grip proved a perfect fit for my hand, and its heft told me this was no toy. And when I fired it up and began routing wood, its performance confirmed my impressions. Despite its compact size, the R2401 muscled through every task I threw at it: round-overs, coves, beads, chamfers, flush trimming, and even 1/4" dadoes.

This router features a soft-start motor with variable speeds from 20,000 to 30,000 rpm, and the lighted plug on its 12'-long cord indicates when it's "live." The R2401 comes with two bases—square and round—as well as an edge guide, two wrenches, a flush-trim bit, and a zippered canvas storage bag.

—Tested by Craig Ruegsegger, Multimedia Editor



Trim router, #R2401

Performance ****

Price \$100

Price

Ridgid 866-539-1710; ridgid.com



Thin-kerf dado stacks up for less-than-1/4" sheet goods

I use a great deal of ¼" plywood for drawer bottoms and cabinet backs in my furniture, but cutting dadoes and grooves can be time-consuming because these sheets typically measure less than ¼" thick. So I have to make two passes with my standard tablesaw blade to get the desired fit. But with Forrest's Special-Width Dado King, I now make those cuts in one pass with amazing precision.

Stack the two outer blades of this 8" set together to cut a perfect 3/16"-wide groove. Then add any of six magnetic shims to fine-tune the cut. The set also includes a 1/16" chipper for grooves 1/4" or wider. The negative tooth-hook angle prevents grain tear-out in hardwoods, veneered plywood, even melamine.

—Tested by Matt Seiler, a custom-furnituremaker



Specialty hinges prevent slamming chest lids

I've designed and built lots of toy boxes and blanket chests over the years, and I've never found lid hinges that work as well as Rockler's Lid-Stay Torsion Hinges. (We used them on the toy box on *page 34*.) Based on the concept of laptop



computer hinges, these Lid-Stays hold a lid in place at any angle, preventing it from dropping onto the chest. That's especially valuable when children reach into a toy box to retrieve toys.


But these hinges aren't universal for all projects: heavier lids will require specific hinges based on its size and weight. Fortunately, Rockler has a torsion calculator on its Web site to help you find the right hinges, available in three sizes and two colors (bronze and silver).

—Tested by Kevin Boyle, Senior Design Editor

Lid-Stay Torsion Hinges

Performance	****		
Price	Single hinge	\$20	
	Two-Pack	\$38	

Rockler Woodworking and Hardware 800-279-4441; rockler.com

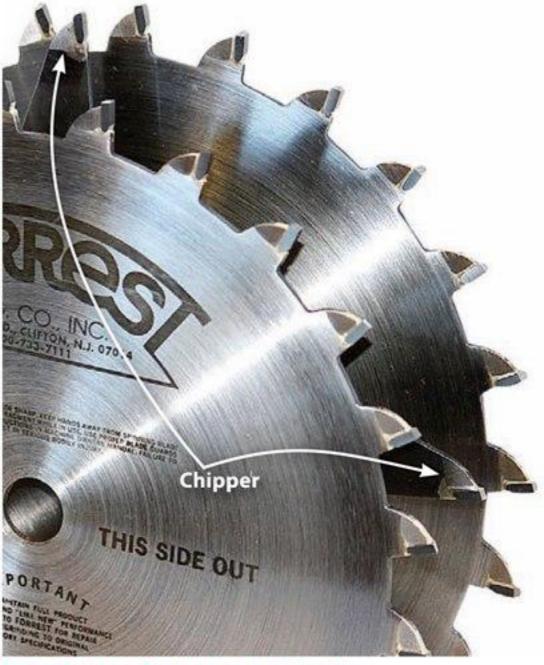

Special-Width Dado King, #DK0824316

Performance ****
Price \$189

Forrest Manufacturing 800-733-7111; forrestblades.com

continued on page 82



Time travel at the speed of a 1935 Speedster?

The 1930s brought unprecedented innovation in machine-age technology and materials. Industrial designers from the auto industry translated the principles of aerodynamics and streamlining into everyday objects like radios and toasters. It was also a decade when an unequaled variety of watch cases and movements came into being. In lieu of hands to tell time, one such complication, called a jumping mechanism, utilized numerals on a disc viewed through a window. With its striking resemblance to the dashboard gauges and radio dials of the decade, the jump hour watch was indeed "in tune" with the times!

The Stauer 1930s Dashtronic deftly blends the modern functionality of a 21-jewel automatic movement and 3-ATM water resistance with the distinctive, retro look of a jumping display (not an actual



True to Machine Art esthetics, the sleek brushed stainless steel case is clear on the back, allowing a peek at the inner workings.

jumping complication). The stainless steel 1 $^{1}/^{2}$ " case is complemented with a black alligator-embossed leather band. The band is 9 $^{1}/^{2}$ " long and will fit a 7–8 $^{1}/^{2}$ " wrist.

Try the Stauer 1930s Dashtronic Watch for 30 days and if you are not receiving compliments, please return the watch for

a full refund of the purchase price. If you have an appreciation for classic design with precision accuracy, the 1930s Dashtronic Watch is built for you. This watch is a limited edition, so please act quickly. Our last two limited edition watches are totally sold out!

Not Available in Stores

Stauer 1930s Dashtronic Watch \$99 +S&H or 3 easy credit card payments of \$33 +S&H Call now to take advantage of this limited offer.

1-800-859-1602

Promotional Code DRW591-02
Please mention this code when you call.

Stauer HERITAGE OF ART & SCIENCE

14101 Southcross Drive W., Dept. DRW591-02 Burnsville, Minnesota 55337 www.stauer.com

Shop-Proven Products

Dead-flat router table weighs little, works large

Sommerfeld's 27×36" router table features a flatter surface and more accessory options than any table I've used. The top consists of three 9×36" extruded aluminum sections that, when coupled together, proved perfectly flat as well as slippery smooth. And this top hasn't sagged at all in the six months I've been using it, even with my heavy 3-hp router suspended below. Because the router mounts directly to the top, there's no fussy insert plate to level. (You can order the top predrilled for Triton routers, or with no holes so you can drill to match your router.) T-slots on the bottom and the included bolts made it easy for me to mount this top to an existing cabinet in my shop.

With four miter-gauge slots and four T-slots, the top gives me lots of options for hold-downs, feather boards, and stopblocks. I also appreciate the eight easy-to-install insert rings, with openings from 1/2" to 25/8", that step down the 35/8"-diameter bit opening.

I found the fence equally impressive, with sliding infeed and outfeed faces that can be shimmed from behind for offset routing, and T-track on the face and top for mounting accessories. It comes with three removeable zero-clearance inserts, and a dust hood with a stepped port for hoses from 11/4" to 21/4" (inside diameter). You can also buy an open-leg metal stand (#LSD5) for

\$120. 🗬



-Tested by Kevin Boyle, Senior Design Editor



Router tabletop with fence, #SORS

Performance

Price

Sommerfeld Tools For Wood 888-228-9268; sommerfeldtools.com

WOOD magazine December/January 2010/2011

\$550


SANDERS FOR YOUR EVERY NEED



82

1" x 30" Belt / 5" Disc Sander Model #50-150

Powerful 1/3 HP TEFC Motor 7-1/4" x 3-3/4" Cast Aluminum Disc Table Solid Steel Base Belt Table Tilts for Chisel Sharpening

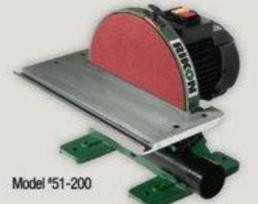

12" Bench Top Disc Sander Model #51-200

Rack & Pinion Table Adjustment Manual Brake Large Working Table **Dust Port**




4" x 36" Belt / 6" Disc Sander Model #50-110

Cast Iron and Steel Construction Belt Speed 1930 SFPM Disc Speed 3420 RPM 0 - 45° Disc Table Fit

Learn about these products and more at www.rikontools.com



877-884-5167 www.rikontools.com

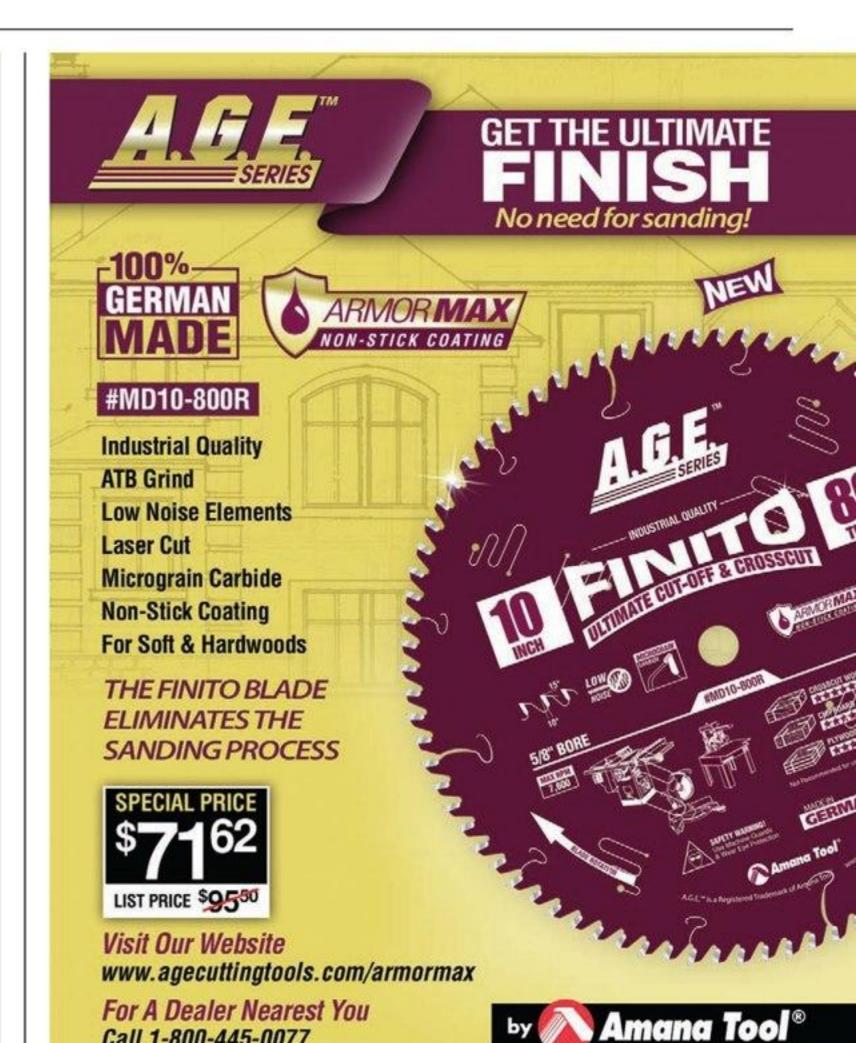





This story breaks my heart every time. Allegedly, just two years ▲ after the discovery of tanzanite in 1967, a Maasai tribesman knocked on the door of a gem cutter's office in Nairobi. The Maasai had brought along an enormous chunk of tanzanite and he was looking to sell. His asking price? Fifty dollars. But the gem cutter was suspicious and assumed that a stone so large could only be glass. The cutter told the tribesman, no thanks, and sent him on his way. Huge mistake. It turns out that the gem was genuine and would have easily dwarfed the world's largest cut tanzanite at the time. Based on common pricing, that "chunk" could have been worth close to \$3,000,000!

The tanzanite gem cutter missed his chance to hit the jeweler's jackpot...and make history. Would you have made the same mistake then? Will you make it today?

In the decades since its discovery, tanzanite has become one of the world's most coveted gemstones. Found in only one remote place on Earth (in Tanzania's Merelani Hills, in the shadow of Mount Kilimanjaro), the precious purple stone is 1,000 times rarer than diamonds. Luxury retailers have been quick to sound the alarm, warning that supplies of tanzanite will not last forever. And in this case, they're right. Once the last purple gem is pulled from the Earth, that's it. No more tanzanite. Most believe that we only have a few years supply left, which is why it's so amazing for us to offer this incredible price break. Some retailers along Fifth Avenue are more than happy to charge you outrageous prices for this rarity. Not Stauer. Staying true to our contrarian nature, we've decided to lower the price of one of the world's rarest and most popular gemstones.

Our 2-Carat Sunburst Tanzanite Ring features marquise-cut gems set dramatically in gorgeous sterling silver. Each facet sparkles with the distinct violet-blue hue of the precious stones. Behind the shine you'll find that the exquisite silverwork of the setting calls to mind the detailed treasures being produced by Europe's finest jewelers. This is a ring designed to impress and it does not disappoint.

Now is the point where opportunity knocks. If you open that door today, you can own this spectacular ring for less than \$100. If you wait? We can't say for sure.

Your satisfaction is completely guaranteed. For our clientfriendly approach, Stauer has earned a rare A+ rating from the Better Business Bureau, a rating we wish to keep. So, of course, your satisfaction is 100% guaranteed. If you are not completely aglow with the Sunburst Tanzanite Ring, send it back within 30 days for a prompt and courteous refund. But, please don't wait, our supply is dropping rapidly.

JEWELRY SPECS:

- 2 ctw genuine tanzanite - .925 sterling silver setting - Ring sizes 5-10

Sunburst Genuine Tanzanite Ring (2 ctw)—\$795 Now \$95 +S&P Save \$700

Call now to take advantage of this limited offer.

1-888-201-7112

Promotional Code TZR167-01 Please mention this code when you call.



Stauer has a Better Business Bureau Rating of A+

Stauer 14101 Southcross Drive W., Dept. TZR167-01 Burnsville, Minnesota 55337



Find the woodworking items you need at...

ptreeusa.com





















Over 5000 woodworking items to choose from! Shop online 24 hours a day.

Call Us Toll Free for a Free Catalog: 1-888-512-9069

Peachtree Woodworking Supply Inc.™, 6684 Jimmy Carter Blvd, Atlanta GA, 30071



The Ultimate in Dust Collection

3HP Cyclone

2300 Max CFM! Self Cleaning 1 Micron Filter **Quick Connect Drum Lever** 55 Gallon Drum Portable!

\$1799.00

With high performance and more features, the JDS 3HP Cyclone is raising the bar for 2-stage dust collectors. The TEFC motor has an aluminum housing that keeps it cooler and helps it run more efficiently. The "Turbo-Fan" impeller produces high amounts of CFM when placed under high amounts of resistance. Removing the steel drum is quick and easy, just lift up the drum lid lever and roll out the drum. The self cleaning 1 micron canister filter has a motor that automatically rotates flappers inside the filter knocking dust down into a collection bag.





2HP Cyclone

1700 Max CFM! 68 inches tall! **Quick Drum Lever** 35 Gallon Drum Portable!

The JDS 2HP Cyclone is the most powerful and compact 2HP Cyclone in the industry. This unit is 68" tall and has a footprint of 40"x 28". The perfect size for basement shops and shops with limited space. The TEFC motor and "Turbo-Fan" impeller produces high amounts of CFM when placed under high amounts of resistance. Removing the steel drum is quick and easy, just lift up the drum lid lever and roll out the drum. The self cleaning 1 micron canister filter has a motor that automatically rotates flappers inside the filter knocking dust down into a collection bag.



8004807259

STATEMENT OF OWNERSHIP, MANAGEMENT, AND CIRCULATION

(Requester Publications Only) 1. Publication Title: Better Homes & Gardens WOOD. 2. Publication Number: 724-890. 3. Filing Date: 10/1/2010. 4. Issue Frequency: February/ March, April/May, June/July, September, October, November, December/January. 5.

Number of Issues Published Annually: 7. 6. Annual Subscription Price: \$28.00. 7. Complete Mailing Address of Known Office of Publication: 1716 Locust Street, Des Moines, Polk Co., IA 50309-3023. 8. Complete Mailing Address of Headquarters or General Business Office of Publisher: 1716 Locust Street, Des Moines, IA 50309-3023. 9. Full Names and Complete Mailing Addresses of Publisher, Editor, and Managing Editor: Publisher: Mark Hagen, 333 North Michigan Ave., Suite 1500, Chicago, IL 60601; Editor: Bill Krier, 1716 Locust Street, Des Moines, IA 50309-3023; Managing Editor: Marlen Kemmet, 1716 Locust Street, Des Moines, IA 50309-3023. 10. Owner: Meredith Corporation, 1716 Locust Street, Des Moines, IA 50309-3023. The names and addresses of all stockholders owning or holding 1 percent or more of the total amount of stock: Bank of New York (The), One Wall Street, 6th Floor, New York, NY 10286; Brown Brothers Harriman & Co., 525 Washington Blvd, New Port Towers, Jersey City, NJ 07302; Charles Schwab & Co., Inc., Attn Proxy Department, 211 Main Street, San Francisco, CA 94105; Citigroup Global Markets, Inc. 333 W. 34th Street, New York, NY 10001; Goldman, Sachs & Co., 30 Hudson Street, Proxy Department, Jersey City, NJ 07302; JPMorgan Chase Bank/IA, Paradigm, B Wing, Floor 6, Mind Space, Malad (W), Mumbai 400 064, India; JP Morgan Chase Bank, National Association, Paradigm, B Wing, Floor 6, Mind Space, Malad (W), Mumbai 400 064, India; Mellon Trust of New England, National, 525 William Penn Place, Suite 3418, Pittsburgh PA 15259; Northern Trust Company (The), 801 S Canal Street, Attn: Capital Structures-C1N Chicago IL 60607; SSB - IBT/BGI, 1776 Heritage Drive, North Quincy MA 02171; SSB-SPDR's, Global Corp Action Dept JAB5W, P.O. Box 1631, Boston MA 02105-1631; State Street Bank and Trust Company, Attn: Paul Desharnais, 1776 Heritage Dr., North Quincy, MA 02171; UMB Bank, National Association, Attn: Jan Guzman, 928 Grand Blvd, Kansas City, MO 64106; U.S. Bank, N.A., Attn: Securities Control, 1555 N. Rivercenter Dr., Ste 302, Milwaukee, WI 53212. Through some of the nominees listed above, the E. T. Meredith and Bohen families and family foundations own, directly or beneficially, approximately 19% of the issued and outstanding stock of the corporation. Each nominee listed above holds stock for one or more stockholders. 11. Known Bondholders, Mortgagees, and Other Security Holders Owning or Holding 1 Percent or More of Total Amount of Bonds, Mortgages, or Other Securities: None. 12. Tax Status (For completion by nonprofit organizations authorized to mail at nonprofit rates) (Check one): The purpose, function, and nonprofit status of this organization and the exempt status for federal income tax purposes: __ Has Not Changed During Preceding 12 Months __ Has Changed During Preceding 12 Months (Publisher must submit explanation of change with this statement) Not applicable.

- Publication Title: Better Homes & Gardens WOOD
- 14. Issue Date for Circulation Data Below: November 2010
- 15. Extent and Nature of Circulation
- Average No. Copies Each Issue During Preceding 12 Months:
 - a. Total Number of Copies (Net press run): 617,911
 - b. Legitimate Paid and/or Requested Distribution (By Mail and Outside the Mail): (1) Outside County Paid/Requested Mail Subscriptions stated on PS Form
 - 3541. (Include direct written request from recipient, telemarketing and Internet requests from recipient, paid subscriptions including nominal rate subscriptions, employer requests, advertiser's proof copies, and exchange copies.): 446,328
 - In-County Paid/Requested Mail Subscriptions stated on PS Form 3541. (Include direct written request from recipient, telemarketing and Internet requests from recipient, paid subscriptions including nominal rate subscriptions, employer requests, advertiser's proof copies, and exchange
 - (3) Sales Through Dealers and Carriers, Street Vendors, Counter Sales, and Other Paid or Requested Distribution Outside USPS®: 45,330
 - Requested Copies Distributed by Other Mail Classes Through the USPS (e.g. First-Class Mail®): 0
 - Total Paid and/or Requested Circulation (Sum of 15b (1), (2), (3), and (4)):
 - Monrequested Distribution (By Mail and Outside the Mail):
 - (1) Outside County Nonrequested Copies Stated on PS Form 3541 (include Sample copies, Requests Over 3 years old, Requests induced by a Premium, Bulk Sales and Requests including Association Requests, Names obtained from Business Directories, Lists, and other sources): 18,605
 - (2) In-County Nonrequested Copies Stated on PS Form 3541 (include Sample copies, Requests Over 3 years old, Requests induced by a Premium, Bulk Sales and Requests including Association Requests, Names obtained from Business Directories, Lists, and other sources): 0
 - (3) Nonrequested Copies Distributed Through the USPS by Other Classes of Mail (e.g. First-Class Mail, Nonrequestor Copies mailed in excess of 10% Limit mailed at Standard Mail® or Package Services Rates): 0
 - (4) Nonrequested Copies Distributed Outside the Mail (Include Pickup Stands
 - Trade Shows, Showrooms and Other Sources): 1,676
 - Total Nonrequested Distribution (Sum of 15d (1), (2), and (3)): 20,281
 Total Distribution (Sum of 15c and e): 511,939
 - Copies not Distributed (See Instructions to Publishers #4, (page #3)): 105,973
- h. Total (Sum of 15f and g): 617,912 Percent Paid and/or Requested Circulation (15c divided by f times 100): 96.04%
 No. Copies of Single Issue Published Nearest to Filing Date:
- - a. Total Number of Copies (Net press run): 640,136
 b. Legitimate Paid and/or Requested Distribution (By Mail and Outside the Mail):
 (1) Outside County Paid/Requested Mail Subscriptions stated on PS Form 3541. (Include direct written request from recipient, telemarketing and Internet requests from recipient, paid subscriptions including nominal rate subscriptions, employer requests, advertiser's proof copies, and exchange
 - copies.): 436,882 (2) In-County Paid/Requested Mail Subscriptions stated on PS Form 3541. (Include direct written request from recipient, telemarketing and Internet requests from recipient, paid subscriptions including nominal rate subscriptions, employer requests, advertiser's proof copies, and exchange
 - (3) Sales Through Dealers and Carriers, Street Vendors, Counter Sales, and Other Paid or Requested Distribution Outside USPS®: 41,553
 - (4) Requested Copies Distributed by Other Mail Classes Through the USPS (e.g. First-Class Mail®): 0
 - Total Paid and/or Requested Circulation (Sum of 15b (1), (2), (3), and (4)):
 - 478,435
 - d. Nonrequested Distribution (By Mail and Outside the Mail):
 - (1) Outside County Nonrequested Copies Stated on PS Form 3541 (include Sample copies, Requests Over 3 years old, Requests induced by a Premium, Bulk Sales and Requests including Association Requests, Names obtained from Business Directories, Lists, and other sources): 26,645
 - (2) In-County Nonrequested Copies Stated on PS Form 3541 (include Sample copies, Requests Over 3 years old, Requests induced by a Premium, Bulk Sales and Requests including Association Requests, Names obtained from
 - Business Directories, Lists, and other sources): 0

 (3) Nonrequested Copies Distributed Through the USPS by Other Classes of Mail (e.g. First-Class Mail, Nonrequestor Copies mailed in excess of 10% Limit mailed at Standard Mail® or Package Services Rates): 0
 - (4) Nonrequested Copies Distributed Outside the Mail (Include Pickup Stands,
 - Trade Shows, Showrooms and Other Sources): 1,676

 e. Total Nonrequested Distribution (Sum of 15d (1), (2), and (3)): 28,321
 - f. Total Distribution (Sum of 15c and e): 506,756
 - g. Copies not Distributed (See Instructions to Publishers #4, (page #3)): 133,380 Total (Sum of 15f and g): 640,136
- Percent Paid and/or Requested Circulation (15c divided by f times 100): 94.41%
- Publication of Statement of Ownership for a Requester Publication is required and will be printed in the December/January 2010/2011 issue of this publication.
 Signature and Title of Editor, Publisher, Business Manager, or Owner: Christy Light, Business Director. Date: 08/10/10. I certify that all information furnished on this form is true and complete. I understand that anyone who furnishes false or misleading information on this form or who omits material or information requested on the form may be subject to criminal sanctions (including fines and imprisonment) and/or civil sanctions (including civil penalties).

ORANGE TOOLS flush



FILE-FREE flush trim bits for laminates!

Don't waste your time hand filing laminates! With these long-lasting extremely sharp carbide tipped CMT router bits you can make sure to achieve smooth flawless results on your laminate surfaces, leaving them nice and smooth to the touch after flush trimming. One single pass is required and no further filing is needed.

Perfect smooth finish in a bit!

CMT USA, Inc.

Toll-free 888.268.2487 info@cmtusa.com www.cmtusa.com

TM: CMT, the CMT logo and the orange color applied to tool surfaces are trademarks of C.M.T. UTENSILI S.P.A. © C.M.T. UTENSILI S.P.A.



GET ORGANIZED TODAY!

Simple steps and smart solutions to help you find a place for everything in your home.

\$6.99 U.S. \$8.99 Canada



Order online at woodmagazine.com/publications

or call toll free 888-636-4478

AD#WD1211

For A Free Catalog Or To Find Your Local Woodcraft Store, Visit woodcraft.com Or Call 800-225-1153.

Smart Tools From FESTOOL

Check out this Festool combo that will make your woodworking a lot easier and more comfortable!



FESTOOL PACKAGE

TS 55 EQ Plunge Cut Saw With Rail & CT 26 HEPA Dust Extractor #26561174

> Reg. \$1,050 Sale \$995

Prices Valid Through December 31, 2010

TS 55 EQ Plunge Cut Saw With Rail - 561174

- 6¼" Dia., 48-Tooth Carbide Tipped Blade
- 55" Guide Rail
- . Cutting Depth On Guide Rail: 115/16" Cut At 90°: 17/16" Cut At 45°
- · 3 Bearing Motor For Smoother Operation
- . Limit Stop & Chip Deflector
- Rotating Dust Port To Manage Hose

CT 26 HEPA Dust Extractor - 583492

- HEPA Filter Surface Area: 3.29 ft.2
- 6.9 Gallon (26 L) Container Capacity
- Maximum Suction Force 137 CFM
- Tool- Or Manual-Activated Startup
- Designed To Navigate Rough Terrain Inside Or Outside
- Works Wet Or Dry

11WI01R



NOVA DVR XP



Available from leading outlets, including WOODCRAFT SUPPLY CRAFT SUPPLIES USA

*Customer satisfaction survey 2009

98% of NOVA lathe owners would recommend their lathe to others*

- · Packed with innovative features
- Best value for money
- Incredible versatility 16" bowls to 29" platters, small pens and long spindle work
- · Power and capacity
- Portable and compact swivel heads, extendable beds







NOVA designed & manufactured by Teknatool International





Smart Tools, Powerful Solutions

Kreg Dealer, at the all new kregtool.com!

www.teknatool.com

Complete your Kreg Jig®

The Kreg Jig® is already one of the handiest tools in your shop; but it gets even better! Whether you want to drill smaller Pocket-Holes, take your work on the road, or work more efficiently, we've got all the accessories you need to get the job done right!





Micro Pocket''' Drill Guide

Tackle 1/2" material with ease! Drills 25% smaller Pocket-Holes. Includes Drill Guide and Drill Bit.

\$49.99



Portable Base

Give your Kreg Jig® the power of 2-tools-in-1! The perfect solution for portable Pocket-Holes!

\$19.99



Quick Change Kit

Instantly switch from drilling holes to driving screws! Includes quick-change chuck, drill and driver bit.

\$29.99



WOODWorkersCenter.com

FREE Product Information from Advertisers in This Issue

Looking for FREE product information? Fill out the coupon in this section to receive FREE product info and catalogs.

Or, for quicker service and instant access to information, visit us online at www.woodworkerscenter.com

Adhesives & Finishes

TITEBOND® III ULTIMATE WOOD GLUE Superior bond strength, waterproof, longer open-assembly time. The Best Wood Glue Ever! Circle No. 24.

GORILLA WOOD GLUE High strength, shorter clamp time, and no dyes for a natural finish. Try it today on your next building project. **Circle No. 50.**

Bits, Blades, Cutting Tools

AMANA TOOL Amana Tool is recognized worldwide as leader in cutting tools for professional woodworkers and hobbyists alike. Circle No. 170.

CMT ORANGE TOOLS Top quality industrial saw blades and router bits at affordable pricing. Circle No. 180.

EAGLE AMERICA Largest selection of professional quality, American-made router bits + 100's of unique accessories. **Circle No. 193.**

FORREST MFG. CO., INC. Top quality blades and dados for an ultra smooth finish. Circle No. 206.

FREUD SAW BLADES This 48-page catalog illustrates the features and benefits for all Freud saw blades. Circle No. 219.

FREUD ROUTER BITS All Freud router bits are represented in this 84-page catalog, including more than 130 new bits and sets. Circle No. 232.

INFINITY CUTTING TOOLS Premium quality router bits/ sets, shaper cutters, saw blades, planer/jointer knives. Circle No. 235.

MLCS WOODWORKING Best quality, huge selection, low prices, superior service. Free Shipping! Circle No. 245.

SOMMERFELD'S TOOLS FOR WOOD Router Bits, Blades, Tools and Tips. FREE catalog & shipping! Circle No. 284.

WOODLINE USA Router tables, routers, router bits, clamps, saw blades and more. Circle No. 310.

Books, Plans and Videos

MEISEL HARDWARE SPECIALTIES CATALOG 2,000+ full-size project plans and hard-to-find hardware. Circle No. 401.

U-BILD WOODWORKING PLANS Since 1948! Hundreds of full-size plans, downloadable plans, low prices. Circle No. 435.

WOOD MAGAZINE WOODWORKING PLANS 1,200+ top-quality furniture, shop, and yard-figure plans from the editors of WOOD® magazine. Catalog. Circle No. 459.

General Woodworking Catalogs

ARMOR CRAFTS Full-size plans to build cradles, rocking horses, clocks and more. Also hardware and wood craft supplies. Circle No. 556.

THE BEALL TOOL COMPANY Inventive solutions for shop problems: wood threading, buffing & more. Circle No. 558.

GRIZZLY INDUSTRIAL, INC. 12,000 woodworking and metalworking machines, tools and accessories — unbeatable prices! **Circle No. 583.**

ROCKLER WOODWORKING & HARDWARE Our premium tools make woodworking efficient and enjoyable. FREE Catalog. Circle No. 661.

WOODCRAFT SUPPLY CORP. Over 15,000 top quality woodworking tools, supplies, and accessories. Circle No. 700.

Hand Tools, Jigs & Clamps

AFFINITY TOOL WORKS Manufacturer of quality hand tools and products for cabinetmaking, carpentry, woodworking.

Circle No. 734.

RELIEVES JOINT PAIN E•Z Pro Mortise and Tenon Jig. Circle No. 780.

KREG TOOL CO. Your one stop shop for everything Pocket-Screw related. Circle No. 802.

DOWELMAX JOINT-MAKING SYSTEM Dowelmax creates joints which are quick, easy, accurate, and strong. **Circle No. 825.**

STANLEY SWEETHEART HAND PLANES New Sweetheart premium hand planes by Stanley. Circle No. 829.

Hardwood & Lumber

STEVE H. WALL LUMBER CO. Quality hardwoods, plywood, exotic lumber. Ship UPS/motor freight, wholesale prices. Circle No. 856.

WOODWORKERS SOURCE Hardwoods from around the world. Circle No. 869.

Kits

BUILD YOUR OWN MURPHY BED Create-A-Bed® murphy bed mechanism includes complete illustrated instructions and DVD, **Circle No. 951.**

KLOCKIT The leading supplier of clock-making supplies for over 35 years! Circle No. 973.

STEEBAR For over 20 years supplying clock kits, pen making kits, and woodworking plans. Circle No. 1002.

WOODEN-GEAR-CLOCKS.COM Create a wooden gear clock—kits and plans available. Circle No. 1008.

Miscellaneous

AZTEC STEEL CORP. Quality pre-engineered arch-style steel buildings at the lowest cost anywhere. Circle No. 1064.

O'KEEFFE'S WORKING HANDS, RELIEF FOR HANDS THAT CRACK AND SPLIT Never greasy or oily and free of scents. Circle No. 1290.

Power Tools

ACME TOOLS Web's finest assortment of tools, equipment and accessories for the contractor, woodworking and do-it-yourselfer. Circle No. 1406.

BOSCH POWER TOOLS The world's largest power tool and accessory manufacturer. **Circle No. 1459.**

COOK'S SAW MFG., L.L.C. Portable sawmills, Edgers, Sharpeners, Band Blades... Free catalog. Video available. Circle No. 1480.

THE CRAFTSMAN GALLERY Router Boss joinery machines and other quality woodworking tools and accessories. Circle No. 1495.

THE NEW DEWALT COMPACT ROUTER Introducing a new kind of router that has the power for tough jobs and is easy to control. Circle No. 1497.

EPILOG Wood engraving and cutting systems — Low Price, High-Quality Laser Systems. Circle No. 1515.

GREX POWER TOOLS Professional fastening systems and pneumatic powered hand tools. **Circle No. 1573.**

RADARCARVE Manufacturer of specialized wood carving duplicators. Circle No. 1673.

TOOLS MADE BY WOODWORKERS New England-based RIKON Power Tools is committed to making the best products for its knowledgeable customers. Circle No. 1679.

SHOPBOT TOOLS INC. Complete CNC systems for applications in wood, plastic and metal. Circle No. 1714.

STANLEY-BOSTITCH FINISH NAILERS & STAPLERS
The preferred brand among professionals when it comes to
finish nailers and staplers. Circle No. 1768.

WOOD-MIZER PRODUCTS Eight Portable Sawmills
Available starting with the LT10 at \$3995. Circle No. 1805.

WOODMASTER TOOLS Multi-duty planers that mold, sand & saw. Circle No. 1820.

Project Parts & Materials

OSBORNE WOOD PRODUCTS, INC. A free catalog of table legs, corbels, and island legs. Circle No. 1849.

OSBORNE WOOD PRODUCTS, INC. WOOD CORBELS offer classic corbels in a broad range of styles. Circle No. 1851.

Shop Accessories

CARTER PRODUCTS COMPANY, INC. Bandsaw Guide kits, tires, stabilizer guides, and many other products. Circle No. 1883.

LIGNOMAT USA, LTD. Affordable, reliable, pin and pinless moisture meters for wood. Free catalog. Circle No. 2013.

ONEIDA AIR SYSTEMS, INC. Free informative catalog contains dust collection systems and complete ductwork. Circle No. 2039.

PENN STATE INDUSTRIES Award-winning dust collection. Collectors, Cyclones, Ductwork and more. Circle No. 2045.

Woodturning Supplies

HUT PRODUCTS Woods, acrylics and supplies for pen and game call turning. Circle No. 2133.

NOVA. SMART TOOLS, POWERFUL SOLUTIONS NOVA lathes, chucks and accessories consistently lead the way in innovative design with their unique mix of powerful features and great value. Circle No. 2134.

PACKARD WOODWORKS Free Catalog for WOODTURNERS! — Quality Lathes, Tools and Supplies. Circle No. 2143.

PENN STATE INDUSTRIES Leading supplier of Turning Products. Pen kits, project, finishes and more. Circle No. 2151.

WOODWorkersCenter.com

FREE Product Information

DEPT. WOJA11

CIRCLE THE NUMBERS BELOW CORRESPONDING TO ITEMS IN THIS ISSUE.							
24	232	556	825	1064	1573	1851	2151
50	235	558	829	1290	1673	1883	4000
170	245	583	856	1406	1679	2013	
180	284	661	869	1459	1714	2039	
193	310	700	951	1480	1768	2045	
205	401	734	973	1495	1805	2133	
206	435	780	1002	1497	1820	2134	
219	459	802	1008	1515	1849	2143	

Discover how rewarding woodworking can be! Get one full year of WOOD® for just \$28.00 (7 issues).

Simply circle No. 4000. You will be billed later.

	Simply circle No. 4000. You will be b		
NAME			
ADDRESS			
CITY	STATE	ZIP	_
E-MAIL ADDRESS			
PHONE (OPTIONAL)		-	


TO ENSURE PROMPT HANDLING OF YOUR ORDER, PLEASE:


- Circle Your Choice(s) in the box above
- Send card to


W00D® Magazine, Dept. W0N010, P.O. Box 5135, Buffalo, NY 14205-5135

- Allow 4-6 weeks for delivery
- This card expires May 30, 2011



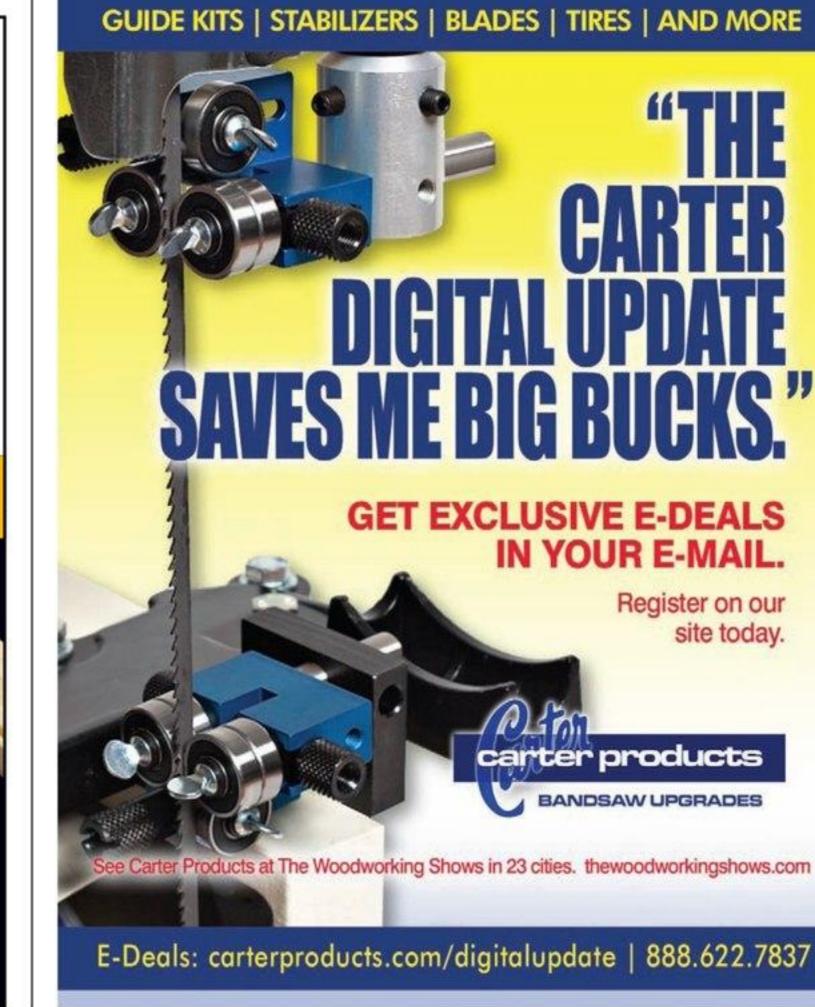

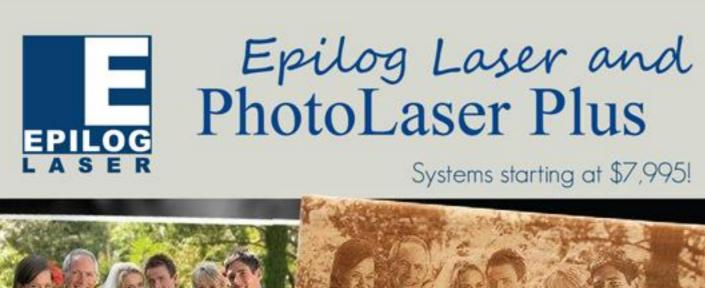

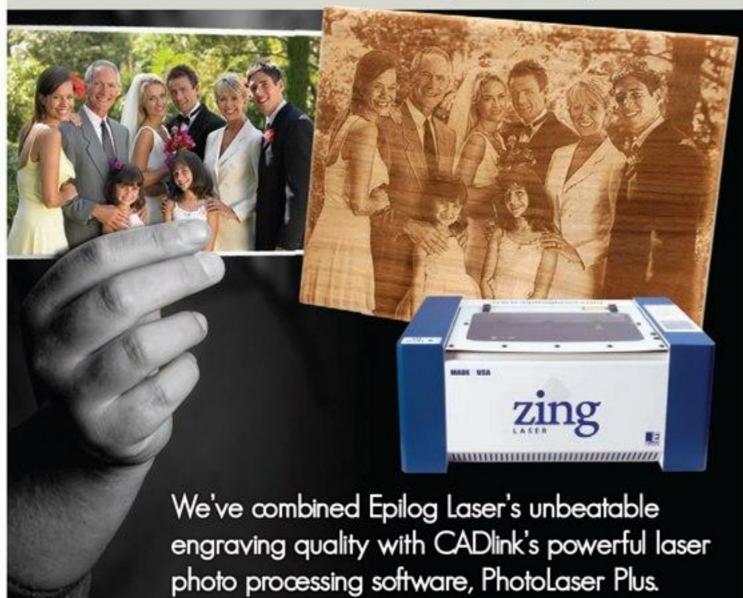

View an online demonstration of PhotoLaser Plus and see how it will provide stunning photo engraving results at www.epiloglaser.com/bhg.htm.

sales@epiloglaser.com • 888-437-4564



4 New Blades

For Discerning Woodworkers

Forrest sets the standard for excellence with these new top-quality blades:

- · Woodworker II 48-Tooth Blade for general-purpose applications. Features a 20° face hook, a 25° bevel, and sharp points for clean cross-grain slicing and quiet, smooth cutting.
- · "Signature Line" Chop Master for quiet, precise cutting and less splintering. Features 90 teeth, a -5° hook to control the feed rate, and re-designed angles with 10" or 12" diameters and 5/8" or 1" center holes.
- 2-Piece & 4-Piece Finger Joint **Sets** with reversible, interlocking 8" blades. Ideal for rabbets and grooves. Blades have 24 teeth and standard 5/8" bore. Reversible for 3/16" and 5/16" cuts or 1/4" and 3/8" cuts.
- Thin Kerf Dados for clean cutting of 3/16" to 1/4" grooves in thin plywood and man-made materials. Available in two-piece and three-piece sets for table or radial arm saws.



Register on our

site today.

Our blades are U.S.A-manufactured and have a 30-day, money-back guarantee. Custom sizes available. Order from Forrest dealers or retailers, by going online, or by calling us directly.



The First Choice of Serious Woodworkers Since 1946


www.ForrestBlades.com 1-800-733-7111 (In NJ, call 973-473-5236)


© 2010 Forrest Manufacturing








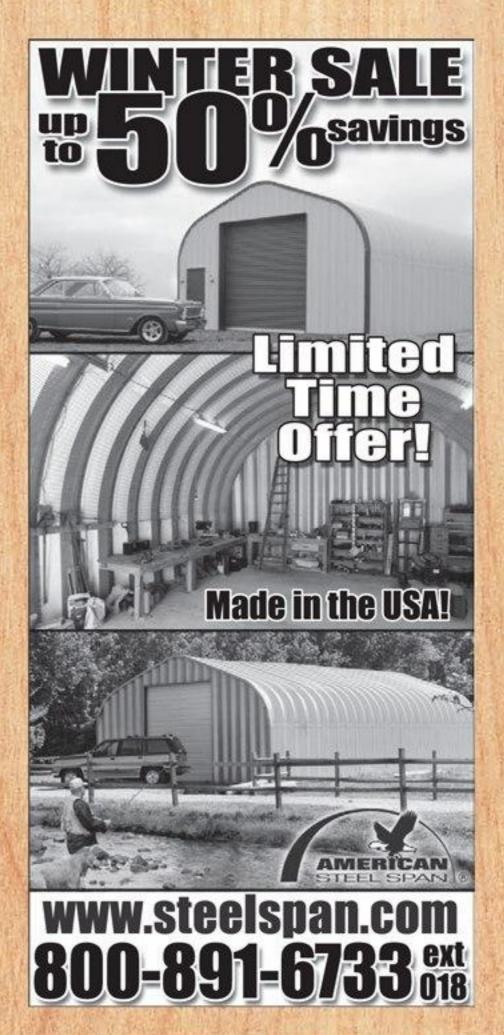


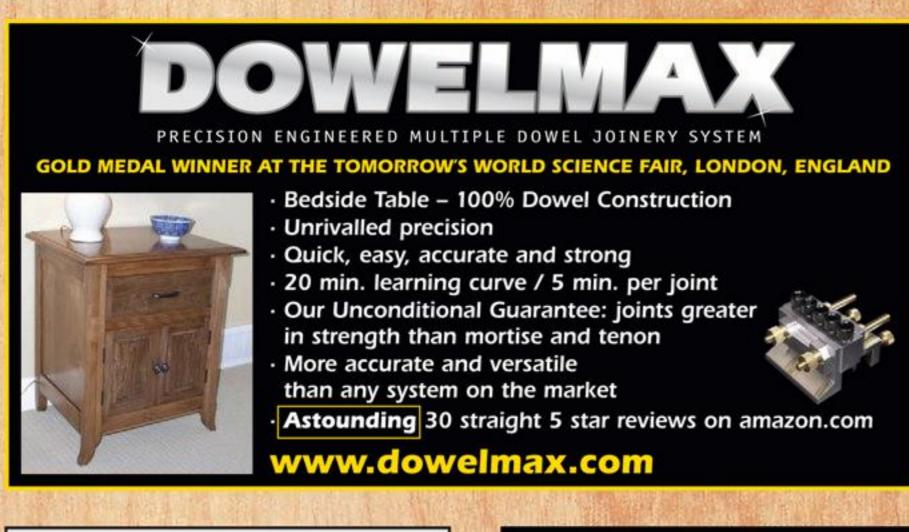







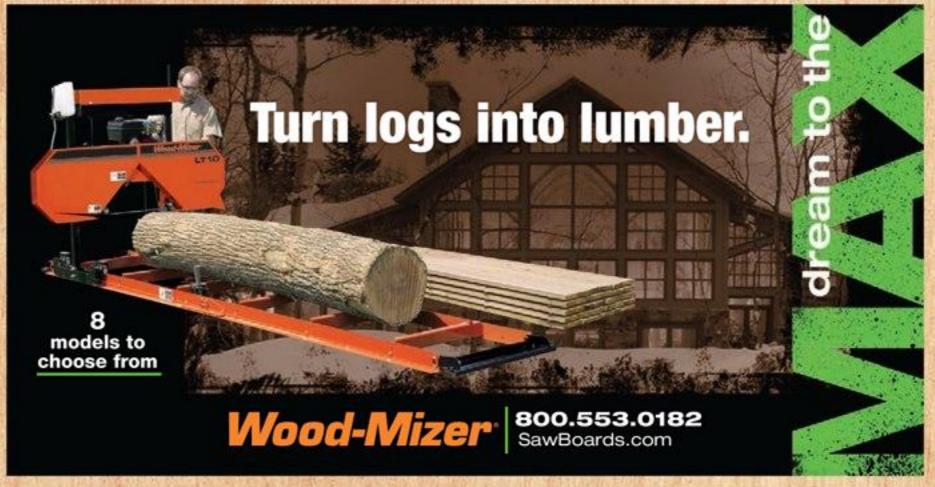

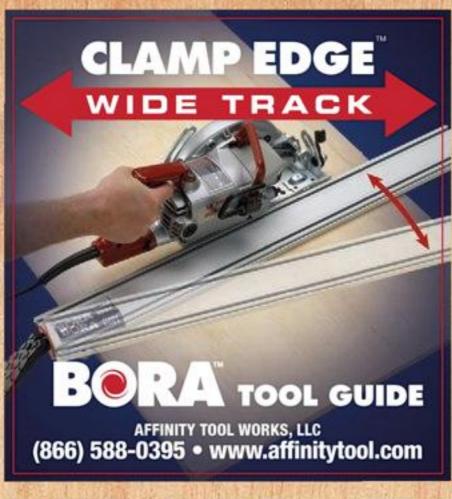


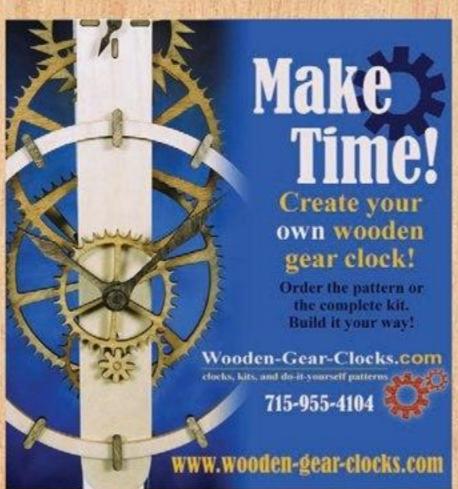



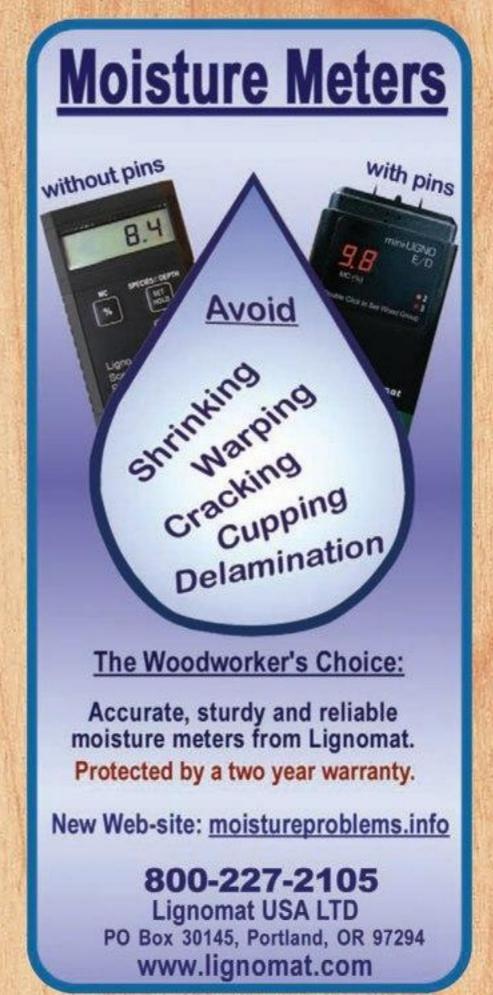




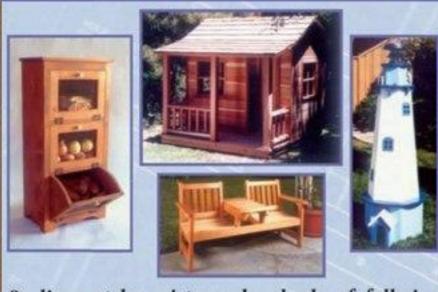

On-line catalog pictures hundreds of full-size woodworking plans at low prices, plus more than 30 downloadable plans. Indoor, outdoor, kids and holiday projects for all skill levels.

800) 82-U-BILD

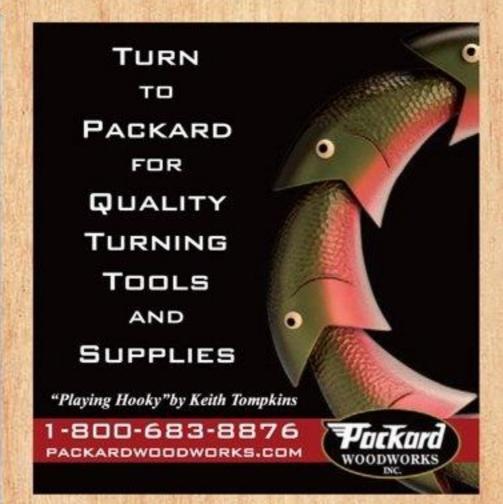

STEVE WALL LUMBER CO.

Quality Hardwoods and Plywood For The Craftsmen and Educational Institutions

Alder 4/4	Select	3.30	
Ash 4/4	Select	2.60	
Basswood 4/4	Select	1.95	
Birch 4/4	Select	3.50	
Butternut 4/4	1C	3.05	
Cedar 4/4	1C+Btr.	2.00	
Cherry4/4	Select	4.90	
Cypress 4/4	Select	2.60	
Hickory - Pecan 4/4	Select	3.00	
Mahogany (Genuine) 4/4	Select	4.90	
Maple (Hard) 4/4	Select	2.80	
Maple (Soft) 4/4	Select	2.50	
Oak (Red)4/4	Select	2.70	
Oak (White) 4/4	QS	2.80	
Poplar 4/4	Select	1.80	
Walnut 4/4	Select	4.90	
White Pine (Soft) 4/4	F.G.	1.25	
Yellow Pine (Soft) 4/4	Clear	2.20	

Above prices are for 100' quantities of kiln dried rough lumber sold by the Bd. Ft. FOB Mayodan, NC. Call for quantity discounts. Other sizes and grades available.

UPS.....\$ 96.00 Specials \$82.00 90.00 98.00 \$ 98.00 \$ 80.00 \$117.00 \$ 72.00 \$ 84.00

Above prices are 20 bd. ft. bundles of clear kiln dried lumber 3"-10" wide • 3'-5' long (Random

widths & lengths) Surfaced 2 sides or rough. Deliv-

ered Ground prepaid in the Continental U.S.

OLIVER MACHINERY DEALER HARDWOOD PLYWOOD **CUSTOM RAISED PANEL DOORS** CUSTOM PLANK HRDWD FLOORING


EXOTIC LUMBER

THIN CRAFTWOOD

STEVE H. WALL LUMBER CO.

BOX 287 MAYODAN, N.C. 27027 336-427-0637 1-800-633-4062 FAX 336-427-7588 Email: wood@walllumber.com Website: www.walllumber.com

Send \$1.00 For Lumber Catalog Prices Subject to Change Without Notice

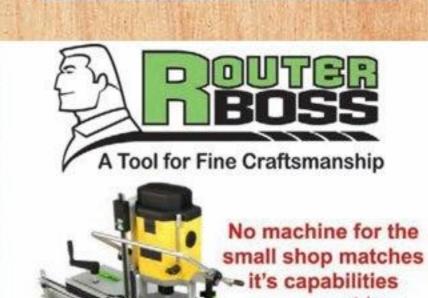

· Innovative design

Power feeds the wood

- Dovetails & Finger Joints
- Mortises & Tenons
- · Rabbets, Dados & Grooves
- Lap & Bridle Joints



Call 513.233.9019

"Few tools attempt to cover such a broad spectrum of joints as Router Boss, it's one of the most effective joint making solutions on the market.'

benchmark.20m.com

Why Settle for Special Function Jigs?

Watch and Learn from Woodworking **Experts!**

Get detailed video instruction from the **WOOD** Magazine editors and Marc Adams.







- Cabinetmaking
- Tool Use
- Finishing
- Turning
- Plus, dozens more topics!




AD#WD1210





Call:1-800-441-9870 Or visit our web site www.meiselwoodhobby.com



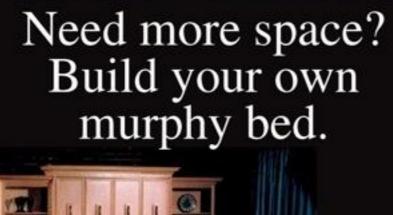





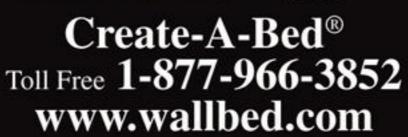

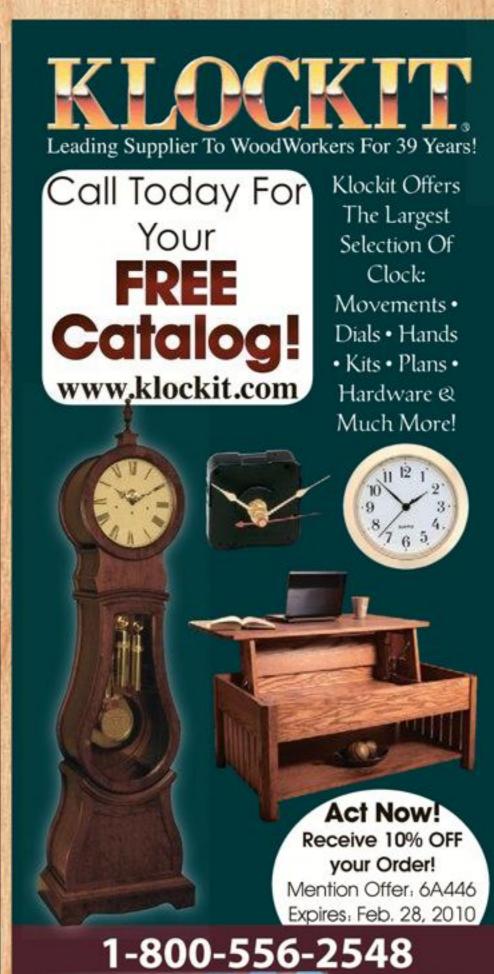



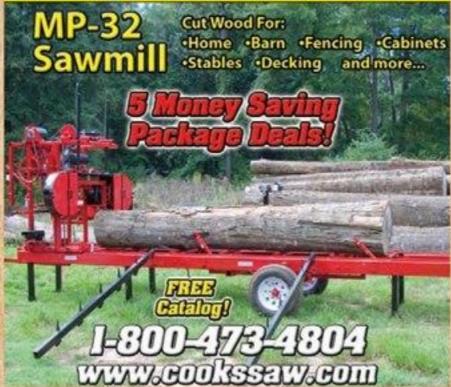


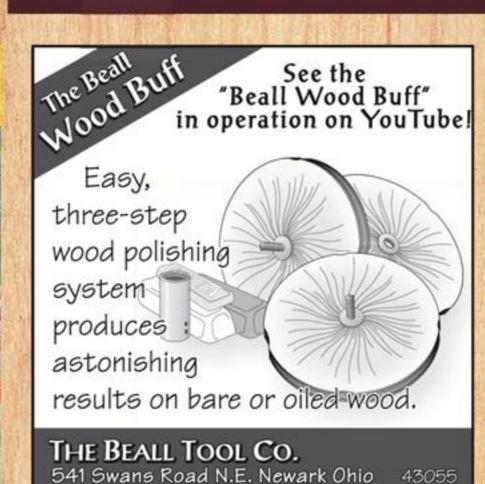

1-800-331-4718 www.bealltool.com Dept.WM

Follow Klockit on: 🐫



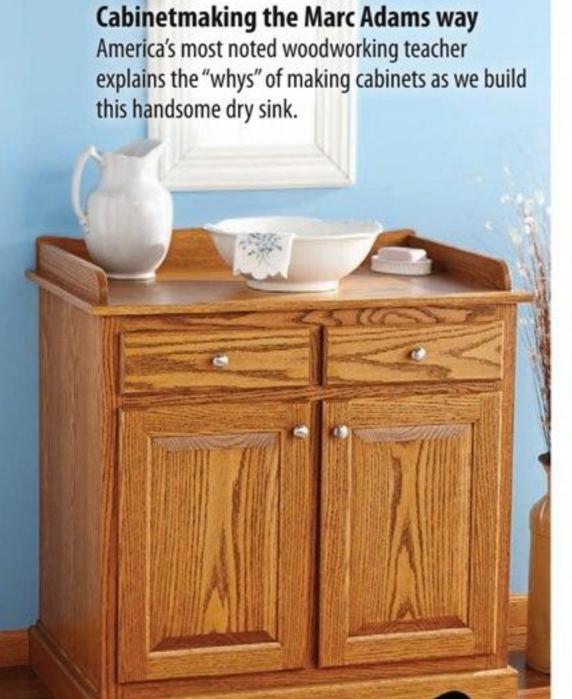





Turn green-wood bowlsPhoto-by-photo, how to go from fresh-cut log to finished bowl using an easy-to-master method.







Easy drawer gliding
Learn to install three types of common drawer slides
for furniture, shop, and cabinetry projects.




Double-decker lighted curioTwo smaller, identical stacked units make this striking mirrored corner curio a snap to build.




Now available, the New Bosch MRC23EVS Router Series. The first modular router system with Trigger Control™ power switches in the base handles, giving you unprecedented control. Built to the rugged standards that Bosch is known for, the new MRC23EVS routers feature 36 innovative enhancements that put them far ahead of the competition. Afterlock™ microfine depth control. Always-on LED lighting. Highest motor rating in their class. Ergonomic handles for ultimate comfort. Advanced above-table depth adjustment. Get your hands on the new Bosch series routers. When you're ready for precision, power and ease of use in a router, pull the trigger on Bosch. To see the video, go to: boschtools.com/totalcontrol





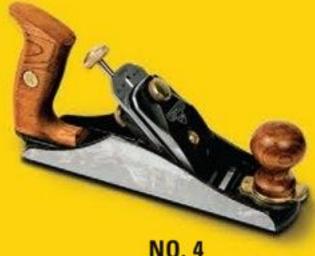

NO. 4 SMOOTHING PLANE

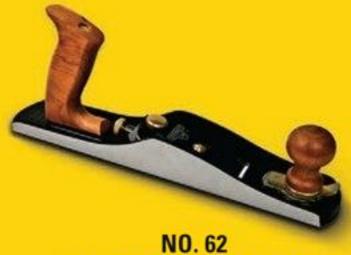

NO. 62 LOW ANGLE JACK PLANE



NO. 9 -1/2 BLOCK PLANE



NO. 60 -1/2 LOW ANGLE BLOCK PLANE



NO. 92 SHOULDER / CHISEL PLANE



Stanley® Revisits A Cherished Era of Quality and Craftsmanship.

Introducing the new line of Stanley® premium hand planes. Their mechanical precision, simple adjustment features, and top-quality materials are once again worthy of the famous Sweetheart™ logo ... a distinction that professionals and serious woodworkers recognize as a coveted symbol of quality. Not only do these hand planes maintain a tradition of quality and craftsmanship, they also offer a Sweetheart™ price as well.



stanleytools.com